

Leading the Future in Refrigeration Technology



EMERSON **ZB Scroll Compressor** **Product Manual**



EMERSON. CONSIDER IT SOLVED.™

| | | | |
|------------------------------------|--------------|---|--------------|
| General Information | 1 | Dimensions | 46-65 |
| Description of Features | 2 | <i>Brazing Connection</i> | 46-49 |
| Nomenclature & BOM | 3 | ZB15~ZB29 (BOM 524) | 46 |
| Application Envelope | 4-5 | ZB38~ZB48 (BOM 524) | 47 |
| R22 | 4 | ZB58 (BOM 524) | 48 |
| R404A/R507 & R134a | 5 | ZB66~ZB88 (BOM 524) | 49 |
| Application Guide | | <i>Rotalock Connection</i> | 50-53 |
| 1. Scroll Compression process | 6-6 | ZB15~ZB29 (BOM 523) | 50 |
| 2. Compressor Internal Protections | 7-8 | ZB38~ZB48 (BOM 523) | 51 |
| 3. Compressor Information | 8-10 | ZB58 (BOM 523) | 52 |
| 4. System Protection Guidelines | 10-11 | ZB66~ZB88 (BOM 523) | 53 |
| 5. Testing Guidelines | 11-13 | <i>Brazing & Sight Glass</i> | 54-55 |
| 6. Field & Installation Guidelines | 13-14 | ZB15~ZB29 (BOM 558) | 54 |
| Performance Data | 15-43 | ZB38~ZB48 (BOM 558) | 55 |
| R22 50Hz 1-Phase | 15-16 | <i>Brazing, Sight Glass & Oil Schrader Valve</i> | 56-59 |
| R22 50Hz 3-Phase | 17-21 | ZB58 (BOM 550) | 56 |
| R404A/R507 50Hz 1-Phase | 22 | ZB66~ZB88 (BOM 550) | 57 |
| R404A/R507 50Hz 3-Phase | 23-25 | ZB95~ZB114 TFD (BOM 550) | 58 |
| R134a 50Hz 1 & 3-Phase | 26-28 | ZB95~ZB114 TW7/TW5 (BOM 550) | 59 |
| R22 60Hz 1-Phase | 29-30 | <i>Rotalock & Sight Glass</i> | 60-61 |
| R22 60Hz 3-Phase | 31-35 | ZB15~ZB29 (BOM 559) | 60 |
| R404A/R507 60Hz 1-Phase | 36-37 | ZB38~ZB48 (BOM 559) | 61 |
| R404A/R507 60Hz 3-Phase | 38-40 | <i>Rotalock, Sight Glass & Oil Schrader Valve</i> | 62-65 |
| R134a 60Hz 1 & 3-Phase | 41-43 | ZB58 (BOM 551) | 62 |
| Technical Data | 44-45 | ZB66~ZB88 (BOM 551) | 63 |
| | | ZB95~ZB114 TFD (BOM 551) | 64 |
| | | ZB95~ZB114 TW7/TW5 (BOM 551) | 65 |
| | | Electrical Wiring Diagram | 66-67 |
| | | ZB15-ZB114 | 66 |
| | | ZB15-ZB114 Control Circuit | 67 |

ZB Series


General Information

ZB Scroll Compressors For Refrigeration And Process Cooling:

In the years since Emerson Climate Technologies introduced ZB scroll compressors for medium-high temperature refrigeration and process cooling applications, it has been well received by our customers. ZB scroll compressors are revolutionizing this segment of the industry by providing the following benefits to our customers.

- * Complete range between 2-15 HP
- * Proven reliability
- * Superior efficiency
- * Low sound levels
- * Availability for HFC and HCFC refrigerants
- * All voltage offering
- * Oil sight glass & Rotalock features

Customers can be confident that ZB scroll compressors are coming from Emerson Climate Technologies' experience of over 80 million scroll compressors. ZB scroll compressors are manufactured in our scroll factories in Suzhou, China and Rayong, Thailand. To our customers, this gives additional value by lower inventory and reduced shipping cost.

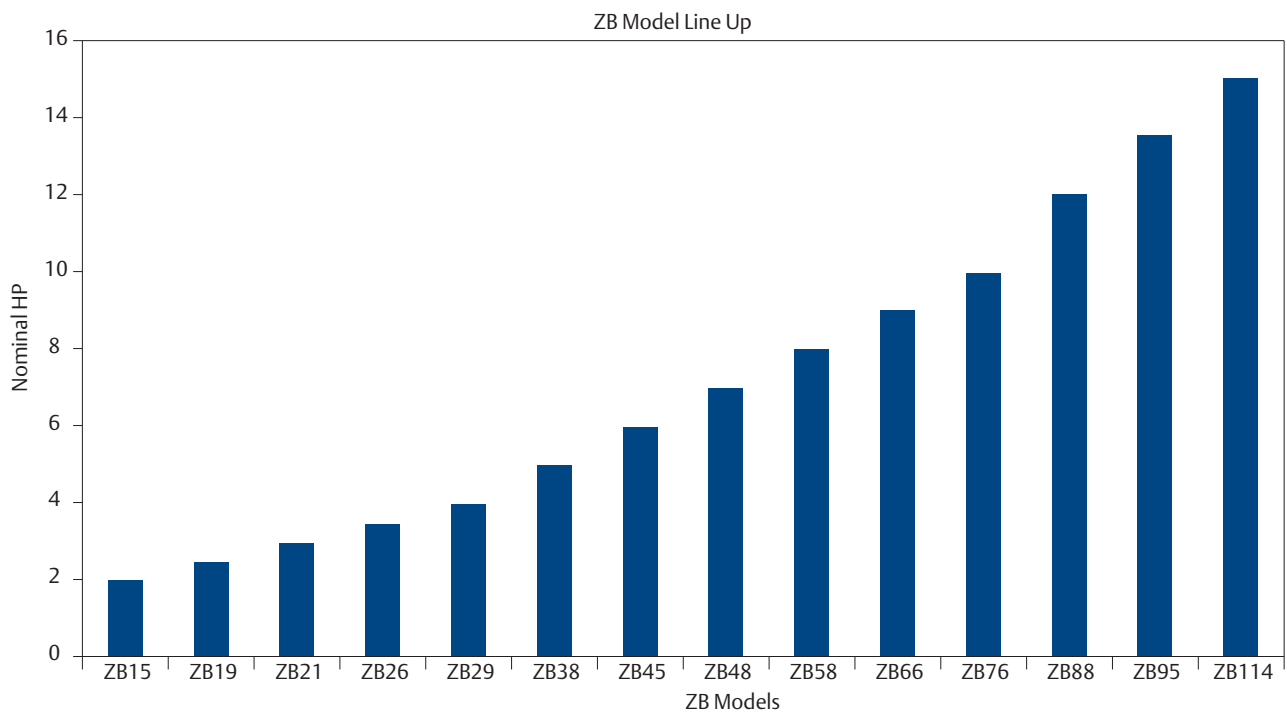

Description of Features

Dual Compliance

Compliance means sealing between the orbiting and fixed scroll involutes. Dual compliance means the sealing is on both the axial and radial directions. This prevents refrigerant leak back across successive scroll pressure pockets. Compliance design also allows the scroll involutes to separate in both the radial and axial directions. This allows debris or liquid refrigerant to pass through the scroll involutes without damaging the compressor. Benefits of Dual Compliance are:

- * Increased efficiency
- * Better liquid handling capability
- * Better handling of debris

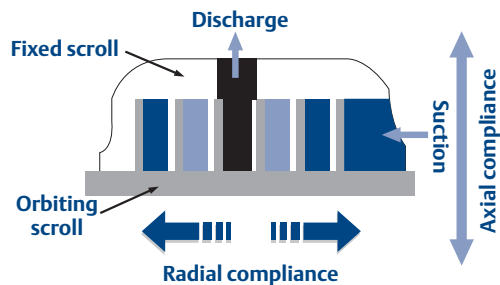


Figure 1

Scroll Wear In

The scroll involutes of Copeland scroll compressor wear in, rather than wear out. So unlike in other compressor technologies among similar categories, there is no constant degradation of performance with time due to wear out.

Lower sound, vibration and pulsation

The compression process in a scroll set is symmetrical and continuous. This inherently reduces the sound, vibration and pulsation. This eliminates the need for use of vibration absorbers and suction or discharge mufflers in most of the applications. In further, ZB scroll compressors are engineered to produce smooth sound spectrum which improves the quality of sound.

Unloaded Start

The scroll sets separate at the instant of compressor shutdown. This allows the scroll set internal pressures to equalize on compressor stops. In addition to this, the scroll sets are not engaged at the instant of starting. Scroll sets engage only after few milliseconds of startup. This allows easier startup of ZB scroll compressors. Due to this design feature, typically a start assist kit is not required even on single phase compressors.

DU bearings

A space age bearing material comprising of porous bronze with PTFE-lead overlay. These bearings are used in ZB scroll compressors in the scroll drive and main bearings. DU bearings work with exceptionally low friction between the load bearing surfaces. In addition, DU bearings can operate safely for a short time with loss of lubrication. This situations could happen on compressor applications due to oil pump out during a flooded start or heavy oil dilution after a defrost cycle.





Figure 2

All specifications in this catalogue are subject to change without notice.

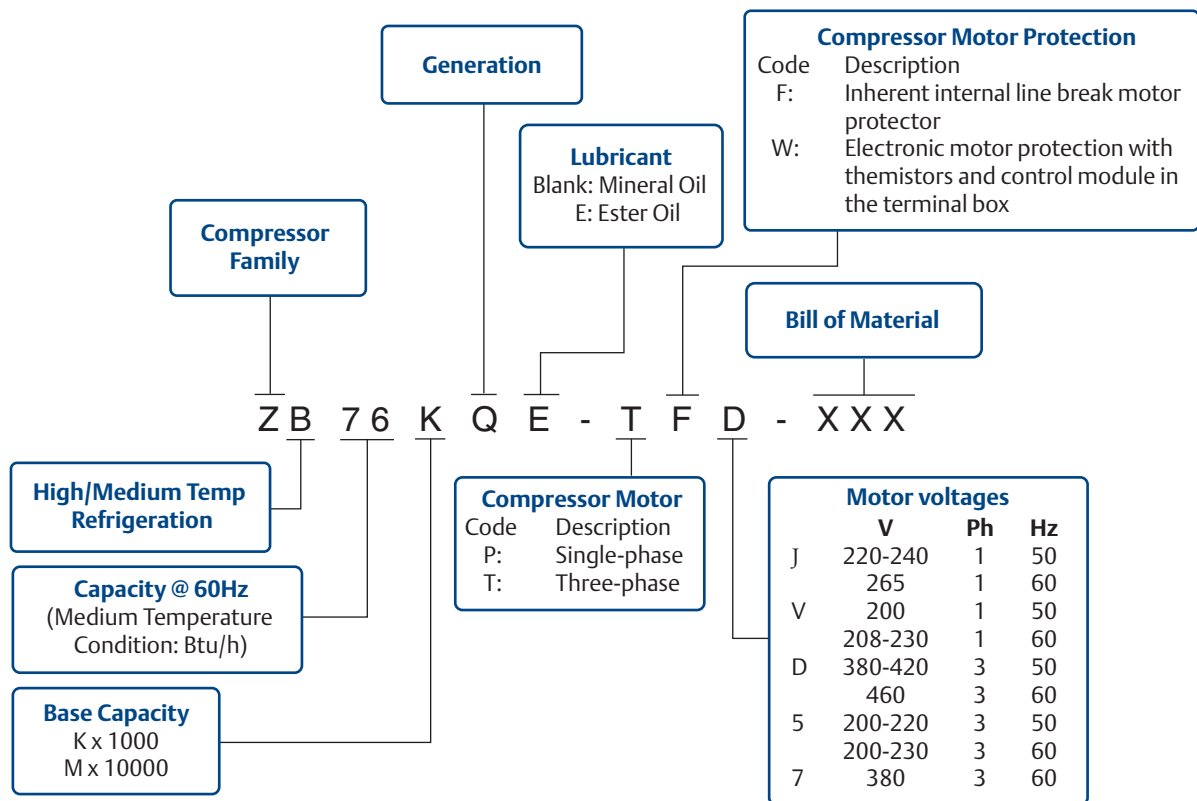

Bill of Material (BOM)


| Compressor Model | BOM Number | Suction & Discharge Brazing Connection | Suction & Discharge Rotalock Connection | Oil Sight Glass | Schrader Valve |
|------------------|------------|--|---|-----------------|----------------|
| ZB15-ZB48 | 523 | | X | | |
| | 524 | X | | | |
| | 558 | X | | X | |
| | 559 | | X | X | |
| ZB58-ZB114 | 523* | | X | | |
| | 524* | X | | | |
| | 550 | X | | X | X |
| | 551 | | X | X | X |

*Not applicable for ZB95/114 models.

Application Envelope

R22


ZB15~ZB88

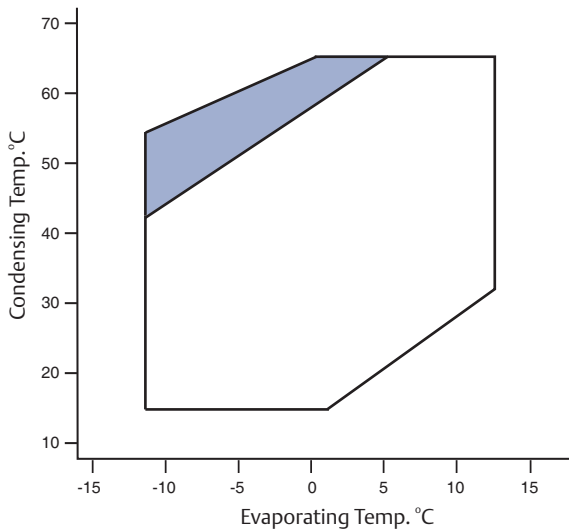

Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only


ZB95/ZB114 (TFD Motor Only)

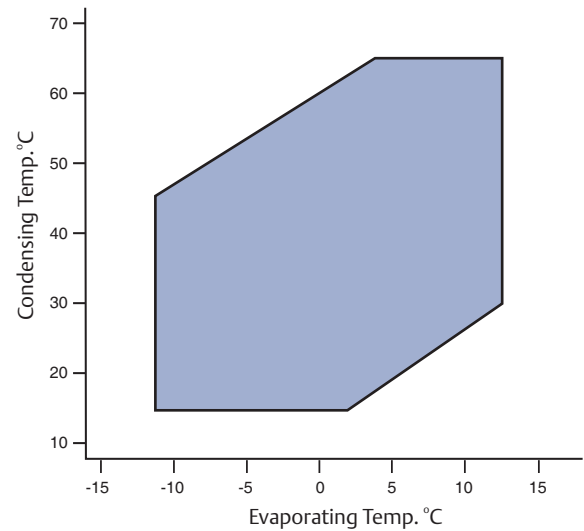

Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only

ZB95/ZB114 (TW7, TW5 Motors)

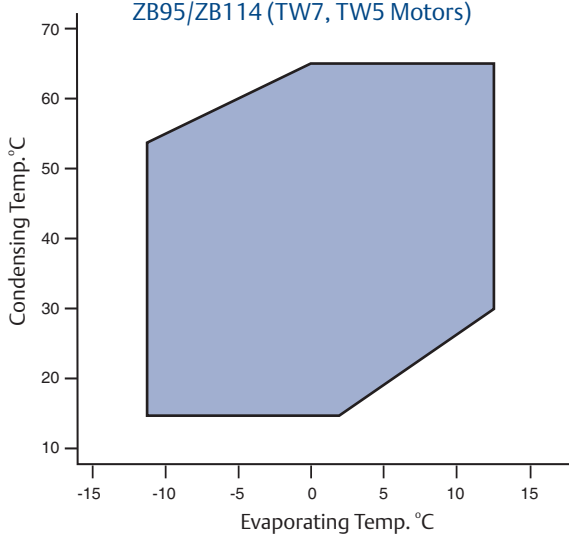


Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only
3. TW5-R22 approved only at 60Hz.

Application Envelope

R404A/R507 & R134a


ZB15~ZB88
R404A/R507

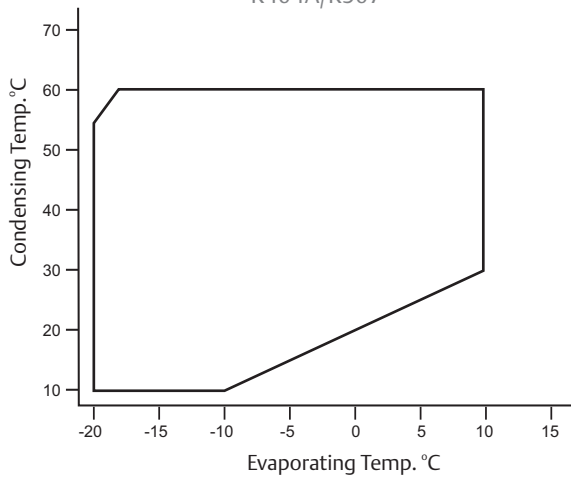

Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only


ZB95/ZB114
R404A/R507

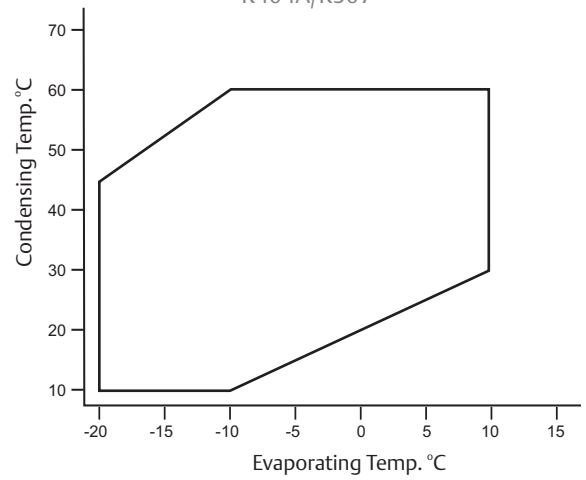

Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only

ZB15~ZB76
R134a

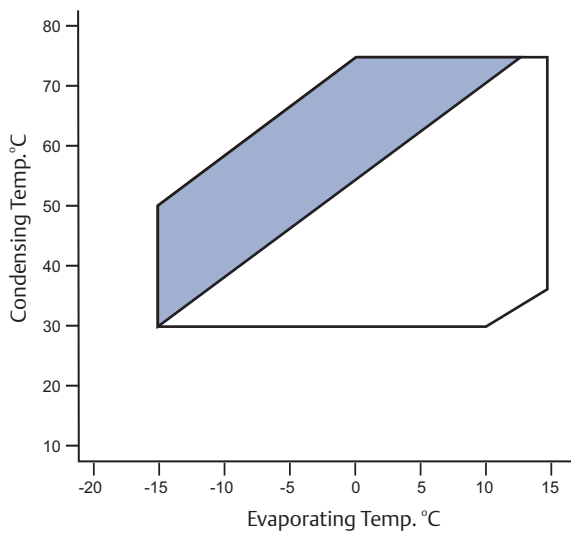

Note:

1. Envelope In Non Shaded Region, max return gas temperature of 18.3°C
2. Envelope In Shaded Region, Max superheat of 11K only

1. Scroll Compression process



Compression in the scroll is created by the interaction of an orbiting spiral and a stationary spiral. Gas enters the outer openings as one of the spirals orbits.




The open passages are sealed off as gas is drawn into the spiral.



As the spiral continues to orbit, the gas is compressed into two increasingly smaller pockets.



By the time the gas arrives at the center port, discharge pressure has been reached.



Actually, during operation, all six gas passages are in various stages of compression at all times, resulting in nearly continuous suction and discharge.

The scroll is a simple compression concept first patented in 1905. A scroll is an involute spiral which, when matched with a mating scroll form as shown above, generates a series of crescent-shaped gas pockets between the two members. During compression, one scroll remains stationary (fixed scroll) while the other form (orbiting scroll) is allowed to orbit (but not rotate) around the first form. As this motion occurs, the pockets between the two forms are slowly pushed to the center of the two scrolls while simultaneously being reduced in volume. When the pocket reaches the center of the scroll form, the gas, which is now at a high pressure, is discharged out of a port located at the center. During compression, several pockets are being compressed simultaneously, resulting in a very smooth process. Both the suction process (outer portion of the scroll members) and the discharge process (inner portion) are continuous.

2. Compressor Internal Protections

2.1 Internal Pressure Relief Valve:

Models ZB15- ZB48 has internal pressure relief valve, which open at a discharge to suction differential pressure of 375 to 450 psi. This action will trip the motor protector and remove the motor from the line.

Models ZB58 - ZB114 do not have internal pressure relief valves. To ensure safe operation, a high pressure control must be used in all applications.

The high pressure control should have a manual reset feature for the highest level of system protection. Maximum cut out settings are listed in **Table 1** If the compressor is fitted with a Rotalock valve the high pressure switch MUST be connected on the compressor side of the valve.

Compressors require a low pressure control for loss of charge protection. If allowed to go undetected, loss of system charge will result in overheating and damage to the scrolls and floating seal. Prolonged operation with low charge will result in decomposition of the oil that might require complete system replacement. Minimum cut out settings are listed in **Table 1**. The low pressure cut-out, if installed in the suction line to the compressor, can provide additional protection against a TXV failed in the closed position, a closed liquid line service valve, or a blocked liquid line screen, filter, orifice, or TXV. All of these can starve the compressor for refrigerant and result in compressor failure. The low pressure cut-out should have a manual reset feature for the highest level of system protection. If a compressor is allowed to cycle after a fault is detected, there is a high probability that the compressor will be damaged and the system contaminated with debris from the failed compressor and decomposed oil. If the compressor is fitted with a Rotalock valve the low pressure switch MUST be connected on the compressor side of the valve.

Table 1
Pressure Setting Recommendations

| Model | Control Type | R22 | R404A/R507 | R134a |
|------------|--------------|------------------------|-------------------------|------------------------|
| ZB15-ZB48 | Low | 1.3Kg/cm ² | 1.2Kg/cm ² | 0.3Kg/cm ² |
| ZB58-ZB114 | High | 28.7Kg/cm ² | 31.88Kg/cm ² | 23.9Kg/cm ² |
| | Low | 1.3Kg/cm ² | 1.2Kg/cm ² | 0.3Kg/cm ² |

2.2 Internal Scroll Temperature Protection

Events such as loss of charge, condenser fan failure, or low side charging with inadequate pressure will cause the discharge gas to quickly rise. Excessively high discharge gas temperatures would affect the scroll compressor reliability. To prevent damage to scroll compressors ZBKQ/E scroll compressors are built-in with internal scroll temperature protection.

Compressor models ZB15-ZB48 incorporate a thermo disc which is a temperature-sensitive snap disc device located at the scroll discharge port. It is designed to open and route hot discharge gas back to the motor protector thus removing the compressor from the line.

Compressor models ZB58-ZB114 models incorporate ASTP feature (Advanced Scroll Temperature Protection). ASTP feature will cause the scrolls to separate and stop pumping but allow the motor to continue to run. After the compressor runs for some time without pumping gas, the motor protector will open.

Depending on the heat build up in the compressor, it may take up to two hours for the motor protector to reset.

2.3 Motor Protection


For the models with a motor protection code "F", an internal line break motor protector is located in the center of the Y of the motor windings. This protector disconnects all three phases in case of an overload or over-temperature condition. The protector reacts to a combination of motor current and motor winding temperature. The internal protector protects against single phasing. Time must be allowed for the motor to cool down before the protector will reset. If current monitoring to the compressor is available, the system controller can take advantage of the compressor internal protector operation. The controller can lock out the compressor if current draw is not coincident with contactor energizing, implying that the compressor has shut off on its internal protector. This will prevent unnecessary compressor cycling on a fault condition until corrective action can be taken.

Models ZB95KQ/E and ZB114KQ/E with motor protection code “W” use a combination of sensors and an electronic module (INT69SU) for motor protection. For the INT69SU, there are four PTC (positive temperature coefficient) internal thermistors connected in series that react with avalanche resistance in the event of high temperatures. All four are used to sense motor temperature. The thermistor circuit is connected to the protector module terminals S1 and S2. When any thermistor reaches a limiting value, the module interrupts the control circuit and shuts off the compressor. After the thermistor has cooled sufficiently, the resistance will decrease, thus allowing the module to reset. However, the module has a 30-minute time delay before reset after a thermistor trip. If the INT69SU module is applied in conjunction with a Programmable Logic Controller, it is important that a minimum load is carried through the M1-M2 control circuit contacts. The minimum required current through the module relay contacts needs to be greater than 100 milliamps but not to exceed 5 amps. If this minimum current is not maintained, this has a detrimental effect upon the long-term contact resistance of the relay and may result in false compressor trips. PLC operated control circuits may not always provide this minimum current. In these cases modifications to the PLC control circuit are required. Consult your application engineering department for details.

3. Compressor Information

3.1 Fusite (Terminal)

Fusite (Terminal) pin orientation for single-phase and three phase refrigeration scroll compressors are shown in **Figure 1** and inside the terminal box.



Motor Terminal (Fusite) Connections for Single Phase and Three Phase Scrolls

Figure 1

3.2 Rotation Direction of Three Phase Scroll Compressors

Scroll compressors will only compress in one rotational direction. Direction of rotation is not an issue with single phase compressors since they will always start and run in the proper direction. Three phase compressors will rotate in either direction depending upon phasing of the power. Since there is a 50-50 chance of connecting power in such a way as to cause rotation in the reverse direction, it is important to include notices and instructions in appropriate locations on the equipment to ensure proper rotation direction when the system is installed and operated. Verification of proper rotation direction is made by observing that suction pressure drops and discharge pressure rises when the compressor is energized. Reverse rotation of a scroll compressor also results in substantially reduced current draw compared to specification sheet values. Suction temperature will be high, discharge temperature will be low and the compressor may be abnormally noisy. There is no negative impact on durability caused by operating three phase Copeland Scroll compressors in the reversed direction for a short period of time (under one hour). In models ZB58 - ZB114 oil may be lost. This oil loss can be prevented during reverse rotation if the suction tubing is routed at least six inches (15 cm) above the compressor. After several minutes of operation in reverse, the compressor's motor protection system will trip the compressor off. If allowed to repeatedly restart and run in reverse without correcting the situation, the compressor will be permanently damaged.

All three phase scroll compressors are identically wired internally. As a result, once the correct phasing is determined for a specific system or installation, connecting properly phased power leads to the same terminals will maintain proper rotation direction.

Brief Power Interruptions

Brief power interruptions (less than ½ second) may result in powered reverse rotation of single-phase refrigeration scroll compressors. High-pressure discharge gas expands backward through the scrolls at power interruption causing the scroll to orbit in the reverse direction. If power is reapplied while this reversal is occurring, the compressor may continue to run noisily in the reverse direction for several minutes until the compressor internal protector trips. This has no negative effect on durability. When the protector resets, the compressor will start and run normally.

No time delay is required on three phase models to prevent reverse rotation due to power interruptions.

3.3 Oil Types

In HCFC R-22 applications, mineral oil is used in the compressor. Polyol ester lubricants must be used with HFC refrigerants (R404A, R507 and 134a). Compressors using polyol ester oil are identified with an "E" in the model number. A separate form may be requested (**Form 93-11**) which lists Emerson approved lubricants that may be used to recharge these compressors or if the addition of oil is required. See compressor nameplate for original oil charge. A complete recharge should be four ounces (118 ml) less than the original oil charge. If the oil level is above the sight glass, it may lead to oil circulation rates higher than 1.5% which may lead to decreased capacity as the oil coats the evaporator coils.

3.4 Deep Vacuum Operation

WARNING: DO NOT RUN A REFRIGERATION SCROLL COMPRESSOR IN A VACUUM. FAILURE TO HEED THIS ADVICE CAN RESULT IN PERMANENT DAMAGE TO THE COMPRESSOR.

A low-pressure control is required for protection against vacuum operation. See the section on pressure controls for the proper set points. (See Table 1)

Scrolls compressors (as with any refrigeration compressor) should never be used to evacuate refrigeration or air conditioning systems.

The scroll compressor can be used to pump-down refrigerant in a unit as long as the pressures remain within the operating envelope. Low suction pressures will result in overheating of the scrolls and permanent damage to the compressor drive bearing or cause the scroll temperature protection to activate.

3.5 Shell Temperature

Certain types of system failures, such as condenser or evaporator fan blockage or loss of charge, may cause the top shell and discharge line to briefly but repeatedly reach temperatures above 350°F (177°C) as the compressor cycles on its internal protection devices. Care must be taken to ensure that wiring or other materials, which could be damaged by these temperatures, do not come in contact with these potentially hot areas.

3.6 Suction and Discharge Fittings

Scroll compressors are available with stub tube or Rotalock connections. The stub tube version has copper plated steel suction and discharge fittings. These fittings are far more rugged than copper fittings used on other compressors. Due to the different thermal properties of steel and copper, brazing procedures may have to be changed from those commonly used. Assembly and brazing procedures are explained in the later part of application guide.

3.7 Starting Characteristics Of Single-Phase Compressors

Single-phase scroll compressors are designed with PSC type motors and therefore will start without the need of start assist devices in most applications. However, if low voltage conditions exist at start up, protector trips can result. Therefore, start assist devices (start capacitors and relays) are available to maximize starting characteristics under abnormal conditions.

3.8 Special handling consideration for ZB58-ZB114

ZB58- ZB114 model compressors have the suction fitting located low on the shell. Due to this, its recommended to leave the suction connection plug in place until the compressor is set into the unit. The discharge connection plug should be removed first before pulling the suction connection plug to allow the dry air pressure inside the compressor to escape. Pulling the plugs in this sequence prevents oil mist from coating the suction tube making the brazing difficult.. The copper coated steel suction tube should be cleaned before brazing. No object (example a swaging tool) should be inserted deeper than 50mm into the suction tube or it might damage the suction screen and motor.

4. System Protection Guidelines

4.1 Accumulator Requirement:

Due to the scrolls' inherent ability to handle liquid refrigerant in flooded start and defrost cycle operation conditions, accumulators may not be required. An accumulator is required on single compressor systems when the charge limitations exceed those values listed in **Table 2**. On systems with defrost schemes or transient operations that allow prolonged uncontrolled liquid return to the compressor, an accumulator is required.

Excessive liquid flood back or repeated flooded starts will dilute the oil in the compressor causing inadequate lubrication and bearing wear. Proper system design will minimize liquid flood back, thereby ensuring maximum compressor life.

Table 2
Charge Limitations

| Models | Charge Limits |
|------------|---------------|
| ZB15- ZB48 | 4.5 Kgs |
| ZB58-ZB114 | 7 Kgs |

4.2 Crankcase Heaters Requirement

Single-phase models

No crankcase heaters are required on single-phase scroll compressors.

Three-phase models

ZB15–ZB48- outdoor only

Crankcase heaters are required on three phase compressors where the system charge exceeds 4.5 Kgs. Table 3 lists the specification of applicable crankcase heaters.

ZB58-ZB114

Crankcase heaters are required where the system charge exceeds 7 Kgs. The crankcase heater must be located below the suction inlet. Table 3 lists the specification of applicable crankcase heaters.

Table 3
Crankcase Heater

| Model | Part No | Volts | Watts | Length |
|------------|-------------|-------|-------|--------------|
| ZB15-ZB48 | 018-0072-04 | 240 | 70 | 48" (122 mm) |
| ZB58-ZB114 | 018-0067-01 | 240 | 90 | 48" (122 mm) |

The listed crankcase heaters are intended for use only when there is limited access (Table 3). The heaters are not equipped for use with electrical conduit. Where applicable, electrical safety codes require lead protection, a crankcase heater terminal box should be used. Recommended crankcase heater terminal box and cover part kit numbers are available with Copeland Application Engineering Department.

The crankcase heater must remain energized during the compressor off cycles.

The initial start in the field is a very critical period for any compressor because all load bearing surfaces are new and require a short break-in period to carry high loads under adverse conditions. **The crankcase heater must be turned on a minimum of 12 hours prior to starting the compressor.** This will prevent oil dilution and bearing stress on initial start up. If it is not feasible to turn on the crankcase heater 12 hours in advance of starting the compressor, then use one of the techniques listed below to prevent possible flooded start damage to the compressor: 1) Direct a 500 watt heat lamp or other safe heat source at the lower shell of the compressor for approximately 30 minutes to boil off any liquid refrigerant prior to starting; or 2) Bump start the compressor by manually energizing the compressor contactor for about one second. Wait five seconds and again manually energize compressor for one second. Repeat this cycle several times until the liquid in the shell has been boiled off and the compressor can be safely started and run continuously.

4.3 Pump-Down Cycle

A pump-down cycle for control of refrigerant migration may be used instead of, or in conjunction with, a crankcase heater when the compressor is located so that cold air blowing over the compressor makes the crankcase heater ineffective. **A separate external check valve must be added to the discharge line if pump-down is used.** The built-in scroll discharge check valve is designed to stop extended reverse rotation and prevent high pressure gas from leaking rapidly into the low side after shut off. High side leak-back through the check valve may exceed amounts typically found in reciprocating compressors with reed valves. This can cause the compressor to recycle more frequently. Repeated short-cycling of this nature can result in low compressor oil and consequent damage to the compressor. The recommended external check valve will prevent the frequent recycling due to leak-back. The low pressure control cut-in and cut-out settings have to be reviewed since a relatively large volume of gas will re-expand from the high side of the compressor into the low side on shut down. Emerson recommends that the cut out setting of the pump-down pressure control be set no more than a few degrees of equivalent saturated pressure below the lowest expected normal operating pressure. It is not necessary to pump-down into nearly a vacuum to remove all liquid refrigerant for the low side. To achieve a fairly wide control differential the cut in setting should be set a few degrees of equivalent saturated pressure below the lowest expected temperature of the medium that is cooled. Copeland Scroll compressors trap a considerable volume of high pressure gas between the muffler plate and the top cap. When the compressor shuts down the trapped gas will expand back into the suction side of the system. This frequently causes a pulse of pressure to propagate down the suction line and can cause the low pressure switch to reset. The compressor must not be allowed to short cycle which may result in oil pump out. The electrical circuitry should be arranged so that compressor restart is triggered by demand from the thermostat rather than a reset low pressure switch. Setting a wider differential between the cutout and cut in pressures of a low pressure switch may solve the short cycling problem but may also result in unacceptable temperature swings in the cooled space. If short cycling cannot be avoided, using a 3 minute time delay will limit the cycling of the compressor to an acceptable level.

4.4 Filter Screens In System

The use of screens finer than 30 x 30 mesh (0.6 mm openings) anywhere in the system is not recommended. Field experience has shown that finer mesh screens used to protect thermal expansion valves, capillary tubes, or accumulators can become temporarily or permanently plugged with normal system debris and block the flow of either oil or refrigerant to the compressor. Such blockage can result in compressor failure.

5. Testing Guidelines

5.1 Compressor Hi-Pot Testing

Refrigeration scroll compressors are configured with the motor in the bottom of the shell. Unlike most other hermetic compressors, the motor of a scroll compressor can be immersed in refrigerant when liquid is present in the shell. Hi- Pot tests with liquid refrigerant in the shell can show higher levels of current leakage due to the higher electrical conductivity of liquid refrigerant vs. refrigerant vapor and oil. This phenomenon can occur with any compressor when the motor is immersed in refrigerant and does not present any safety issue. To lower the current leakage reading, operate the system for a brief period of time redistributing the refrigerant to a more normal configuration and test again. Under no circumstances should the Hipot test be performed while the compressor is in vacuum.

5.2 Scroll Compressor Functional Check

A functional compressor test with the suction service valve closed to check how low the compressor will pull suction pressure is not a good indication of how well a compressor is performing. Such a test will almost certainly damage a scroll compressor. The following diagnostic procedure should be used to evaluate whether a Copeland Scroll compressor is working properly.

1. Proper voltage to the unit should be verified.
2. The normal checks of motor winding continuity and short to ground should be made to determine if the inherent overload motor protector has opened or if an internal motor short or ground fault has developed. If the protector has opened, the compressor must be allowed to cool sufficiently to allow it to reset.

3. Proper indoor and outdoor blower/fan operation should be verified.
 4. With service gauges connected to suction and discharge pressure fittings, turn on the compressor. If suction pressure falls below normal levels, the system is either low on charge or there is a flow blockage in the system.
 5. In single Phase Compressors, if suction pressure does not drop and discharge pressure does not rise to normal levels the compressor is faulty. But in Three Phase compressors, reverse any two of the compressor power leads and reapply power to make sure compressor was not wired to run in reverse direction.
 6. Before replacing, be certain that the compressor is actually defective. As a minimum, recheck a compressor returned from the field in the shop or depot for Hipot, winding resistance, and ability to start. Experience shows that more than one third of compressors are determined to have nothing found wrong. They were mis-diagnosed in the field as being defective. Replacing working compressors unnecessarily costs everyone.
 7. **NEVER** test a scroll compressor by closing the suction valve or the liquid feed to the evaporator and pumping the compressor into a vacuum.
- Determine the control voltage by using a voltmeter and then measure the voltage across the M1-M2 contacts:
 - a. If the measured voltage is equal to the control volts then the M1-M2 contacts are open.
 - b. If the measurement is less than 1 volt and the compressor is not running, then the problem is external to the INT69SU module.
 - c. If the voltage is greater than 1 volt but less than the control voltage, the module is faulty and should be replaced.

Sensor Troubleshooting

- Remove the leads from S1-S2, and then by using an ohmmeter measure the resistance of the incoming leads.

CAUTION: Use an Ohmmeter with a maximum of 9 VDC for checking – do not attempt to check continuity through the sensors with any other type of instrument. Any external voltage or current may cause damage requiring compressor replacement.

 - a. During normal operation, this resistance value should read less than 4500 ohms $\pm 20\%$.
 - b. If the M1-M2 contacts are open, the measured S1-S2 value is above 2750 ohms $\pm 20\%$ and the compressor has been tripped less than 30 minutes then the module is functioning properly.
- If the S1-S2 wire leads read less than 2750 ohms $\pm 20\%$ and the M1-M2 contacts are open, reset the module by removing the power to T1-T2 for a minimum of 5 seconds.
- Replace all wire leads and use a voltmeter to verify the M1-M2 contacts are closed.
- If the M1-M2 contacts remain open and S1-S2 are less than 2500 ohms, remove leads from the M1-M2 contacts and jumper together;

CAUTION: Compressor should start at this time. HOWEVER DO NOT LEAVE JUMPER IN PLACE FOR NORMAL SYSTEM OPERATIONS. THE JUMPER IS USED FOR DIAGNOSTIC PURPOSES ONLY.
- Go to Compressor Supply Voltage Troubleshooting.

5.3 Electronic Motor Protection Module and Sensor Functional Check

The following field troubleshooting procedure can be used to evaluate the solid state control circuit: Refer to **Table 4** for a technical data summary.

Module Voltage Supply Troubleshooting

- Verify that all wire connectors are maintaining a good mechanical connection. Replace any connectors that are loose.
- Measure the voltage across T1-T2 to ensure proper supply voltage.

Compressor Supply Voltage Troubleshooting

- Remove phase sensing leads from the module from L1/L2/L3.
- Use a voltmeter to measure the incoming 3 phase voltage on L1/L2/L3.
WARNING: L1/L2/L3 could be at a potential up to 600VAC.
- Ensure proper voltage on each phase.
- Remove power to the module for a minimum of 5 seconds to reset and replace all wire leads. Reenergize the module. If the M1-M2 contacts are open with proper voltage to T1-T2, L1/L2/L3 and proper resistance to S1-S2 then the module is faulty and should be replaced.


Table 4
Technical Data Summary Of Module

| | |
|-------------------------------------|--------------------------------------|
| Emerson P/N | 071-0641-00 |
| Manufacturer P/N Kriwan 69SU | Kriwan 69SU |
| T1-T2 Module Power | |
| Voltage Supply | 120V & 240V |
| Frequency | 50Hz & 60Hz |
| M1-M2 Module Output Contacts | |
| Maximum Voltage | 250VAC |
| Maximum Current | 5 Amps |
| Minimum Current | 100 milliamps |
| Relay Output | 5 A, 300 VA |
| Power Output | <3 VA |
| S1-S2 Thermal Protection | |
| Trip Out Resistance | 4500W ± 20% |
| Reset Resistance | 2750W ± 20% |
| Reset Time | 30 min ± 5 min |
| Manual Reset | T1-T2 interrupt for minimum of 5 sec |
| L1-L2-L3 Phase Monitoring | |
| Phase Sensor | Non Phase Sensing |
| Phase Monitoring Circuit Rating | Non Phase Sensing |
| Trip Delay | Non Phase Sensing |
| Lockout | Non Phase Sensing |
| Reset For Lockout | Non Phase Sensing |

6. Field & Installation Guidelines

6.1 Assembly Line And Field Brazing

ZB Scroll compressors are available with stub tube and Rotalock connections. The stub tube version has copper plated steel suction and discharge fittings. Due to the different thermal properties of steel and copper, brazing procedures may have to be changed from those commonly used. The guidelines below give a description for assembly line and field brazing procedures.

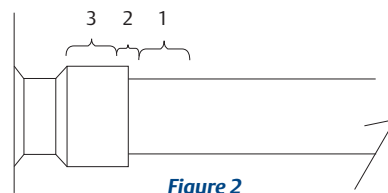

New Installations

- The copper-coated steel suction and discharge tubes on scroll compressors can be brazed in approximately the same manner as any copper tube.
- Recommended brazing materials: Any silfos material is recommended, preferably with a minimum of 5% silver. However, 0% silver is acceptable.
- Be sure compressor tube fittings I.D. and connecting tube O.D. are clean prior to assembly. If oil film is present wipe with denatured alcohol, Dichloro-Trifluoroethane or other suitable solvent.
- Using a double-tipped torch apply heat in Area 1. As tube approaches brazing temperature, move torch flame to Area 2.
- Heat Area 2 until braze temperature is attained, moving torch up and down and rotating around tube as necessary to heat tube evenly. Add braze material to the joint while moving torch around joint to flow braze material around circumference.
- After braze material flows around joint, move torch to heat Area 3. This will draw the braze material down into the joint. The time spent heating Area 3 should be minimal.
- As with any brazed joint, overheating may be detrimental to the final result.

Field Service

Unbrazing System Components

CAUTION!

If the refrigerant charge is removed from a scroll unit by bleeding the high side only, it is sometimes possible for the scrolls to seal preventing pressure equalization through the compressor. This may leave the low side shell and suction line tubing pressurized. If a brazing torch is then applied to the low side, the pressurized refrigerant oil mixture could ignite as it escapes and contacts the brazing flame. It is important to check both the high and low sides with manifold gauges before unbrazing. In the case of an assembly line repair, remove the refrigerant from both the high and low sides. Instructions should be provided in appropriate product literatures and assembly areas

- To disconnect: Reclaim refrigerant from both the high and low side of the system. Cut tubing near compressor.
- To reconnect. Recommended brazing material is Silfos with minimum 5% silver or silver braze material with flux. Insert tubing stubs into fitting and connect to the system with tubing connectors. Follow **New Installation** brazing instructions.

Brazing Procedure

Figure 2 discusses the proper procedures for brazing the suction and discharge lines to a Copeland Scroll compressor. It is important to flow nitrogen through the system while brazing all joints during the system assembly process. Nitrogen displaces the air and prevents the formation of copper oxides in the system.

If allowed to form, the copper oxide flakes can later be swept through the system and block screens such as those protecting capillary tubes, thermal expansion valves, and accumulator oil return holes. The blockage - whether it is of oil or refrigerant - is capable of doing damage resulting in compressor failure.

6.2 Compressor Replacement after Motor Burn

In the case of a motor burn, the majority of contaminated oil will be removed with the compressor. The rest of the oil is cleaned through use of suction and liquid line filter dryers. A 100% activated alumina suction filter drier is recommended but must be removed after 72 hours. Separate bulletins are available on request for clean up procedures and for liquid line filter drier recommendations. AE Bulletin 24-1105 for clean up procedures AE Bulletin 11-1297 for liquid line filter drier recommendations.

It is highly recommended that the suction accumulator be replaced if the system contains one. This is because the accumulator oil return orifice or screen may be plugged with debris or may become plugged shortly after a compressor failure. This will result in starvation of oil to the replacement compressor and a second failure.

6.3 System Charging Procedure

Systems should be charged with liquid on the high side to the extent possible. The majority of the charge should be pumped into the high side of the system to prevent hi pot failures, and bearing washout during first time start. If additional charge is needed, it should be added as liquid, in a controlled manner, to the low side of the system with the compressor operating. Pre-charging on the high side and adding liquid on the low side of the system are both meant to protect the compressor from operating with abnormally low suction pressures during charging.

Do not start the compressor while the system is in a deep vacuum. Internal arcing may occur when a compressor is started in a vacuum Do not operate compressor without enough system charge to maintain at least 7 psig (0.5Kg/cm²) suction pressure. Do not operate with a restricted suction. Do not operate with the low pressure cut-out jumpered. Allowing pressure to drop below 2°F(-16°C) for more than a few seconds may overheat scrolls and cause early drive bearing damage or cause the scroll temperature protection to activate. Do not use compressor to test opening set point of high pressure cutout. Bearings are susceptible to high load damage before they have had several hours of normal running for proper break in. Never install a system in the field and leave it unattended with no charge, or with the service valves closed without securely locking out the system. This will prevent unauthorized personnel from accidentally operating the system and potentially ruining the compressor by operating with no refrigerant flow.

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|------|------|------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB15KQ | Q | 15 | 4000 | 4350 | 5250 | 6250 | | | |
| | | 20 | 3850 | 4200 | 5050 | 6050 | 7200 | | |
| | | 30 | 3550 | 3850 | 4700 | 5600 | 6650 | 7900 | 8600 |
| | | 40 | 3250 | 3500 | 4250 | 5150 | 6100 | 7250 | 7900 |
| | | 50 | 2650 | 2900 | 3850 | 4600 | 5500 | 6550 | 7150 |
| | | 55 | | 2700 | 3400 | 4350 | 5200 | 6200 | 6750 |
| | | 60 | | | 3150 | 3900 | 4850 | 5800 | 6350 |
| | 65 | | | | 3600 | 4500 | 5400 | 5900 | |
| | P | 15 | 870 | 870 | 870 | 890 | | | |
| | | 20 | 960 | 950 | 960 | 970 | 990 | | |
| | | 30 | 1150 | 1150 | 1150 | 1160 | 1170 | 1180 | 1180 |
| | | 40 | 1400 | 1400 | 1390 | 1400 | 1400 | 1410 | 1400 |
| | | 50 | 1730 | 1720 | 1710 | 1710 | 1710 | 1700 | 1700 |
| | | 55 | | 1910 | 1900 | 1900 | 1890 | 1890 | 1880 |
| 60 | | | | 2120 | 2110 | 2110 | 2090 | 2080 | |
| 65 | | | | 2360 | 2340 | 2330 | 2310 | | |
| ZB19KQ | Q | 15 | 4650 | 5000 | 6050 | 7250 | | | |
| | | 20 | 4450 | 4800 | 5850 | 6950 | 8300 | | |
| | | 30 | 4100 | 4450 | 5400 | 6450 | 7700 | 9100 | 9900 |
| | | 40 | 3700 | 4050 | 4900 | 5900 | 7050 | 8350 | 9100 |
| | | 50 | 3050 | 3350 | 4400 | 5300 | 6350 | 7550 | 8250 |
| | | 55 | | 3100 | 3900 | 5000 | 6000 | 7150 | 7800 |
| | | 60 | | | 3600 | 4500 | 5600 | 6700 | 7350 |
| | 65 | | | | 4150 | 5200 | 6250 | 6800 | |
| | P | 15 | 980 | 980 | 980 | 1000 | | | |
| | | 20 | 1080 | 1070 | 1080 | 1090 | 1110 | | |
| | | 30 | 1300 | 1290 | 1290 | 1300 | 1320 | 1330 | 1330 |
| | | 40 | 1580 | 1570 | 1570 | 1570 | 1580 | 1580 | 1580 |
| | | 50 | 1940 | 1930 | 1930 | 1920 | 1920 | 1920 | 1910 |
| | | 55 | | 2150 | 2140 | 2140 | 2130 | 2120 | 2110 |
| 60 | | | | 2390 | 2380 | 2370 | 2350 | 2340 | |
| 65 | | | | 2650 | 2640 | 2620 | 2600 | | |
| ZB21KQ | Q | 15 | 5850 | 6300 | 7650 | 9100 | | | |
| | | 20 | 5600 | 6100 | 7350 | 8800 | 10450 | | |
| | | 30 | 5150 | 5600 | 6800 | 8150 | 9700 | 11500 | 12500 |
| | | 40 | 4700 | 5100 | 6200 | 7450 | 8900 | 10550 | 11500 |
| | | 50 | 3850 | 4200 | 5550 | 6700 | 8000 | 9550 | 10400 |
| | | 55 | | 3950 | 4900 | 6300 | 7550 | 9000 | 9850 |
| | | 60 | | | 4550 | 5650 | 7050 | 8450 | 9250 |
| | 65 | | | | 5200 | 6550 | 7850 | 8600 | |
| | P | 15 | 1360 | 1360 | 1370 | 1390 | | | |
| | | 20 | 1500 | 1490 | 1500 | 1520 | 1550 | | |
| | | 30 | 1800 | 1800 | 1800 | 1810 | 1830 | 1850 | 1850 |
| | | 40 | 2200 | 2190 | 2180 | 2190 | 2200 | 2200 | 2200 |
| | | 50 | 2700 | 2690 | 2680 | 2680 | 2680 | 2670 | 2660 |
| | | 55 | | 3000 | 2980 | 2970 | 2970 | 2950 | 2940 |
| 60 | | | | 3320 | 3310 | 3300 | 3270 | 3260 | |
| 65 | | | | 3690 | 3670 | 3640 | 3620 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB26KQ | Q | 15 | 6750 | 7300 | 8800 | 10500 | | | |
| | | 20 | 6450 | 7000 | 8500 | 10150 | 12050 | | |
| | | 30 | 5950 | 6450 | 7850 | 9400 | 11200 | 13300 | 14450 |
| | | 40 | 5400 | 5900 | 7150 | 8600 | 10250 | 12200 | 13300 |
| | | 50 | 4400 | 4850 | 6400 | 7750 | 9250 | 11000 | 12050 |
| | | 55 | | 4550 | 5700 | 7250 | 8700 | 10400 | 11350 |
| | | 60 | | | 5250 | 6550 | 8150 | 9750 | 10650 |
| | 65 | | | | 6000 | 7550 | 9050 | 9950 | |
| | P | 15 | 1470 | 1460 | 1470 | 1500 | | | |
| | | 20 | 1610 | 1600 | 1610 | 1630 | 1660 | | |
| | | 30 | 1940 | 1930 | 1930 | 1950 | 1970 | 1980 | 1980 |
| | | 40 | 2360 | 2350 | 2340 | 2350 | 2360 | 2360 | 2360 |
| | | 50 | 2900 | 2890 | 2880 | 2870 | 2870 | 2860 | 2850 |
| | | 55 | | 3220 | 3200 | 3190 | 3190 | 3170 | 3150 |
| 60 | | | | 3570 | 3550 | 3540 | 3520 | 3500 | |
| 65 | | | | 3960 | 3940 | 3910 | 3890 | | |
| ZB29KQ | Q | 15 | 7850 | 8550 | 10250 | 12050 | | | |
| | | 20 | 7600 | 8300 | 10000 | 11800 | 13800 | | |
| | | 30 | 7000 | 7650 | 9300 | 11100 | 13050 | 15350 | 16650 |
| | | 40 | 6400 | 6950 | 8500 | 10150 | 12050 | 14300 | 15600 |
| | | 50 | 5400 | 5900 | 7650 | 9150 | 10900 | 13000 | 14250 |
| | | 55 | | 5650 | 6850 | 8600 | 10250 | 12250 | 13450 |
| | | 60 | | | 6500 | 7800 | 9600 | 11500 | 12650 |
| | 65 | | | | 7350 | 9000 | 10750 | 11800 | |
| | P | 15 | 1640 | 1660 | 1710 | 1770 | | | |
| | | 20 | 1790 | 1800 | 1850 | 1900 | 1940 | | |
| | | 30 | 2120 | 2130 | 2170 | 2210 | 2250 | 2270 | 2280 |
| | | 40 | 2530 | 2540 | 2580 | 2610 | 2650 | 2670 | 2670 |
| | | 50 | 3030 | 3050 | 3090 | 3130 | 3160 | 3180 | 3190 |
| | | 55 | | 3340 | 3390 | 3430 | 3470 | 3490 | 3500 |
| 60 | | | | 3720 | 3770 | 3810 | 3840 | 3850 | |
| 65 | | | | 4150 | 4200 | 4230 | 4240 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling OK

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|------|------|------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB15KQ | Q | 15 | 4050 | 4400 | 5250 | 6200 | | | |
| | | 20 | 3900 | 4250 | 5100 | 6050 | 7150 | | |
| | | 30 | 3550 | 3900 | 4700 | 5650 | 6700 | 7850 | 8500 |
| | | 40 | 3200 | 3500 | 4250 | 5150 | 6100 | 7250 | 7850 |
| | | 50 | 2650 | 2900 | 3800 | 4550 | 5450 | 6500 | 7100 |
| | | 55 | | 2700 | 3350 | 4250 | 5100 | 6100 | 6650 |
| | | 60 | | | 3100 | 3850 | 4750 | 5700 | 6200 |
| | 65 | | | | 3550 | 4400 | 5250 | 5750 | |
| | P | 15 | 780 | 780 | 800 | 830 | | | |
| | | 20 | 870 | 870 | 890 | 920 | 960 | | |
| | | 30 | 1090 | 1090 | 1100 | 1120 | 1150 | 1180 | 1180 |
| | | 40 | 1350 | 1350 | 1370 | 1390 | 1410 | 1420 | 1420 |
| | | 50 | 1680 | 1680 | 1700 | 1720 | 1740 | 1750 | 1740 |
| | | 55 | | 1880 | 1890 | 1920 | 1940 | 1940 | 1940 |
| 60 | | | | 2110 | 2140 | 2160 | 2160 | 2160 | |
| 65 | | | | 2380 | 2410 | 2410 | 2410 | | |
| ZB19KQ | Q | 15 | 4650 | 5050 | 6050 | 7150 | | | |
| | | 20 | 4500 | 4850 | 5850 | 7000 | 8200 | | |
| | | 30 | 4100 | 4450 | 5450 | 6500 | 7700 | 9050 | 9800 |
| | | 40 | 3700 | 4050 | 4900 | 5900 | 7050 | 8350 | 9050 |
| | | 50 | 3050 | 3300 | 4350 | 5250 | 6300 | 7500 | 8150 |
| | | 55 | | 3100 | 3850 | 4950 | 5900 | 7050 | 7700 |
| | | 60 | | | 3600 | 4400 | 5500 | 6550 | 7150 |
| | 65 | | | | 4100 | 5050 | 6050 | 6650 | |
| | P | 15 | 880 | 880 | 900 | 940 | | | |
| | | 20 | 990 | 990 | 1010 | 1040 | 1090 | | |
| | | 30 | 1240 | 1240 | 1250 | 1280 | 1310 | 1340 | 1340 |
| | | 40 | 1540 | 1540 | 1550 | 1570 | 1600 | 1620 | 1620 |
| | | 50 | 1910 | 1910 | 1930 | 1950 | 1970 | 1980 | 1980 |
| | | 55 | | 2130 | 2150 | 2180 | 2200 | 2210 | 2200 |
| 60 | | | | 2400 | 2430 | 2450 | 2460 | 2450 | |
| 65 | | | | 2710 | 2730 | 2740 | 2730 | | |
| ZB21KQ | Q | 15 | 5900 | 6350 | 7650 | 9050 | | | |
| | | 20 | 5650 | 6150 | 7400 | 8800 | 10350 | | |
| | | 30 | 5200 | 5650 | 6850 | 8200 | 9700 | 11450 | 12400 |
| | | 40 | 4650 | 5100 | 6200 | 7450 | 8900 | 10500 | 11450 |
| | | 50 | 3800 | 4200 | 5500 | 6650 | 7950 | 9450 | 10300 |
| | | 55 | | 3900 | 4850 | 6200 | 7450 | 8850 | 9700 |
| | | 60 | | | 4550 | 5550 | 6900 | 8250 | 9050 |
| | 65 | | | | 5150 | 6400 | 7650 | 8350 | |
| | P | 15 | 1150 | 1150 | 1170 | 1220 | | | |
| | | 20 | 1290 | 1290 | 1310 | 1350 | 1410 | | |
| | | 30 | 1610 | 1610 | 1620 | 1660 | 1700 | 1730 | 1740 |
| | | 40 | 2000 | 1990 | 2010 | 2040 | 2080 | 2100 | 2100 |
| | | 50 | 2480 | 2480 | 2500 | 2530 | 2560 | 2570 | 2570 |
| | | 55 | | 2760 | 2790 | 2820 | 2850 | 2860 | 2860 |
| 60 | | | | 3110 | 3150 | 3180 | 3190 | 3180 | |
| 65 | | | | 3510 | 3550 | 3550 | 3540 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB26KQ | Q | 15 | 6900 | 7500 | 8950 | 10650 | | | |
| | | 20 | 6650 | 7200 | 8700 | 10350 | 12350 | | |
| | | 30 | 6100 | 6650 | 8050 | 9650 | 11550 | 13850 | 15150 |
| | | 40 | 5550 | 6050 | 7350 | 8800 | 10550 | 12700 | 13950 |
| | | 50 | 4600 | 5050 | 6600 | 7900 | 9450 | 11400 | 12550 |
| | | 55 | | 4750 | 5850 | 7400 | 8850 | 10700 | 11750 |
| | | 60 | | | 5500 | 6650 | 8250 | 9950 | 10950 |
| | 65 | | | | 6200 | 7650 | 9200 | 10150 | |
| | P | 15 | 1230 | 1200 | 1200 | 1220 | | | |
| | | 20 | 1380 | 1360 | 1350 | 1380 | 1410 | | |
| | | 30 | 1740 | 1720 | 1710 | 1740 | 1770 | 1760 | 1730 |
| | | 40 | 2210 | 2180 | 2170 | 2190 | 2210 | 2200 | 2170 |
| | | 50 | 2840 | 2800 | 2770 | 2780 | 2790 | 2760 | 2720 |
| | | 55 | | 3190 | 3140 | 3140 | 3140 | 3100 | 3060 |
| 60 | | | | 3570 | 3550 | 3540 | 3490 | 3440 | |
| 65 | | | | 4030 | 4000 | 3930 | 3880 | | |
| ZB29KQ | Q | 15 | 7900 | 8550 | 10250 | 12150 | | | |
| | | 20 | 7600 | 8250 | 9900 | 11800 | 13900 | | |
| | | 30 | 6950 | 7550 | 9200 | 11000 | 13000 | 15350 | 16600 |
| | | 40 | 6250 | 6800 | 8300 | 10000 | 11900 | 14100 | 15350 |
| | | 50 | 5100 | 5600 | 7400 | 8900 | 10650 | 12700 | 13800 |
| | | 55 | | 5250 | 6500 | 8350 | 9950 | 11900 | 13000 |
| | | 60 | | | 6050 | 7450 | 9250 | 11100 | 12100 |
| | 65 | | | | 6900 | 8550 | 10250 | 11200 | |
| | P | 15 | 1460 | 1460 | 1490 | 1560 | | | |
| | | 20 | 1640 | 1640 | 1670 | 1720 | 1790 | | |
| | | 30 | 2050 | 2040 | 2060 | 2110 | 2160 | 2210 | 2220 |
| | | 40 | 2540 | 2540 | 2560 | 2600 | 2640 | 2670 | 2670 |
| | | 50 | 3150 | 3160 | 3190 | 3230 | 3260 | 3280 | 3270 |
| | | 55 | | 3520 | 3550 | 3600 | 3630 | 3650 | 3640 |
| 60 | | | | 3960 | 4010 | 4050 | 4060 | 4050 | |
| 65 | | | | 4470 | 4510 | 4520 | 4510 | | |
| ZB38KQ | Q | 15 | 9800 | 10600 | 12700 | 15050 | | | |
| | | 20 | 9450 | 10200 | 12350 | 14650 | 17300 | | |
| | | 30 | 8650 | 9400 | 11400 | 13650 | 16150 | 19050 | 20650 |
| | | 40 | 7750 | 8450 | 10300 | 12400 | 14800 | 17550 | 19050 |
| | | 50 | 6350 | 6950 | 9200 | 11050 | 13250 | 15750 | 17150 |
| | | 55 | | 6500 | 8100 | 10350 | 12400 | 14800 | 16150 |
| | | 60 | | | 7550 | 9250 | 11500 | 13800 | 15050 |
| | 65 | | | | 8550 | 10650 | 12750 | 13950 | |
| | P | 15 | 1850 | 1850 | 1890 | 1970 | | | |
| | | 20 | 2070 | 2070 | 2100 | 2180 | 2270 | | |
| | | 30 | 2580 | 2580 | 2610 | 2660 | 2730 | 2790 | 2810 |
| | | 40 | 3210 | 3210 | 3230 | 3290 | 3340 | 3370 | 3380 |
| | | 50 | 3980 | 3990 | 4020 | 4070 | 4120 | 4140 | 4130 |
| | | 55 | | 4450 | 4490 | 4540 | 4590 | 4600 | 4590 |
| 60 | | | | 5010 | 5070 | 5110 | 5130 | 5110 | |
| 65 | | | | 5650 | 5700 | 5710 | 5700 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling OK

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB45KQ | Q | 15 | 11800 | 12750 | 15350 | 18350 | | | |
| | | 20 | 11350 | 12300 | 14800 | 17700 | 21100 | | |
| | | 30 | 10450 | 11350 | 13700 | 16400 | 19500 | 23100 | 25100 |
| | | 40 | 9450 | 10300 | 12500 | 14950 | 17800 | 21100 | 22950 |
| | | 50 | 7650 | 8400 | 11100 | 13400 | 16000 | 18950 | 20650 |
| | | 55 | | 7750 | 9750 | 12500 | 15000 | 17850 | 19400 |
| | | 60 | | | 8950 | 11150 | 13950 | 16650 | 18150 |
| | 65 | | | | 10200 | 12800 | 15350 | 16800 | |
| | P | 15 | 2080 | 2100 | 2160 | 2230 | | | |
| | | 20 | 2340 | 2360 | 2410 | 2470 | 2550 | | |
| | | 30 | 2950 | 2970 | 3010 | 3050 | 3100 | 3170 | 3230 |
| | | 40 | 3710 | 3730 | 3760 | 3790 | 3810 | 3850 | 3890 |
| | | 50 | 4650 | 4680 | 4710 | 4720 | 4730 | 4750 | 4770 |
| | | 55 | | 5230 | 5270 | 5280 | 5280 | 5290 | 5300 |
| 60 | | | | 5890 | 5900 | 5890 | 5890 | 5890 | |
| 65 | | | | 6590 | 6580 | 6570 | 6570 | | |
| ZB48KQ | Q | 15 | 12950 | 14000 | 16900 | 20200 | | | |
| | | 20 | 12500 | 13500 | 16300 | 19500 | 23200 | | |
| | | 30 | 11500 | 12450 | 15050 | 18050 | 21450 | 25400 | 27600 |
| | | 40 | 10400 | 11300 | 13700 | 16450 | 19600 | 23200 | 25250 |
| | | 50 | 8400 | 9250 | 12200 | 14700 | 17550 | 20850 | 22700 |
| | | 55 | | 8550 | 10750 | 13750 | 16500 | 19600 | 21350 |
| | | 60 | | | 9850 | 12300 | 15350 | 18300 | 19950 |
| | 65 | | | | 11200 | 14100 | 16900 | 18450 | |
| | P | 15 | 2290 | 2310 | 2380 | 2460 | | | |
| | | 20 | 2570 | 2600 | 2660 | 2720 | 2810 | | |
| | | 30 | 3250 | 3270 | 3310 | 3350 | 3400 | 3490 | 3550 |
| | | 40 | 4080 | 4100 | 4140 | 4160 | 4190 | 4240 | 4280 |
| | | 50 | 5120 | 5140 | 5180 | 5200 | 5200 | 5220 | 5240 |
| | | 55 | | 5750 | 5800 | 5810 | 5810 | 5810 | 5830 |
| 60 | | | | 6480 | 6490 | 6480 | 6480 | 6480 | |
| 65 | | | | 7250 | 7240 | 7220 | 7220 | | |
| ZB58KQ | Q | 15 | 15400 | 16650 | 20150 | 24200 | | | |
| | | 20 | 14650 | 15900 | 19350 | 23300 | 27800 | | |
| | | 30 | 13300 | 14500 | 17750 | 21450 | 25700 | 30500 | 33150 |
| | | 40 | 11850 | 13000 | 16100 | 19600 | 23550 | 28050 | 30500 |
| | | 50 | 9250 | 10350 | 14150 | 17450 | 21150 | 25300 | 27600 |
| | | 55 | | 9300 | 12250 | 16200 | 19800 | 23800 | 26000 |
| | | 60 | | | 11000 | 14250 | 18250 | 22150 | 24250 |
| | 65 | | | | 12750 | 16600 | 20300 | 22350 | |
| | P | 15 | 2740 | 2760 | 2790 | 2860 | | | |
| | | 20 | 3100 | 3110 | 3150 | 3210 | 3310 | | |
| | | 30 | 3900 | 3900 | 3930 | 3970 | 4050 | 4190 | 4270 |
| | | 40 | 4880 | 4880 | 4890 | 4910 | 4960 | 5060 | 5120 |
| | | 50 | 6140 | 6140 | 6120 | 6110 | 6120 | 6180 | 6220 |
| | | 55 | | 6900 | 6870 | 6840 | 6830 | 6860 | 6900 |
| 60 | | | | 7720 | 7670 | 7640 | 7650 | 7670 | |
| 65 | | | | 8620 | 8570 | 8540 | 8550 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

50 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB66KQ | Q | 15 | 17200 | 18650 | 22600 | 27150 | | | |
| | | 20 | 16550 | 17950 | 21750 | 26150 | 31200 | | |
| | | 30 | 15300 | 16550 | 20100 | 24200 | 28850 | 34200 | 37100 |
| | | 40 | 13950 | 15150 | 18450 | 22200 | 26500 | 31400 | 34050 |
| | | 50 | 11400 | 12500 | 16550 | 20050 | 23950 | 28400 | 30850 |
| | | 55 | | 11600 | 14650 | 18800 | 22550 | 26800 | 29150 |
| | | 60 | | | 13500 | 16850 | 21100 | 25100 | 27300 |
| | 65 | | | | 15450 | 19450 | 23300 | 25400 | |
| | P | 15 | 2840 | 2850 | 2900 | 2970 | | | |
| | | 20 | 3330 | 3350 | 3400 | 3480 | 3590 | | |
| | | 30 | 4270 | 4300 | 4360 | 4430 | 4540 | 4690 | 4790 |
| | | 40 | 5340 | 5360 | 5410 | 5470 | 5550 | 5680 | 5760 |
| | | 50 | 6710 | 6720 | 6740 | 6770 | 6820 | 6890 | 6950 |
| | | 55 | | 7560 | 7570 | 7580 | 7600 | 7650 | 7690 |
| 60 | | | | 8540 | 8520 | 8510 | 8530 | 8550 | |
| 65 | | | | 9620 | 9570 | 9560 | 9560 | | |
| ZB76KQ | Q | 15 | 20300 | 22000 | 26750 | 32250 | | | |
| | | 20 | 19500 | 21150 | 25700 | 30950 | 36900 | | |
| | | 30 | 18000 | 19500 | 23700 | 28550 | 34000 | 40150 | 43500 |
| | | 40 | 16400 | 17850 | 21750 | 26150 | 31200 | 36850 | 39900 |
| | | 50 | 13350 | 14700 | 19500 | 23600 | 28200 | 33350 | 36150 |
| | | 55 | | 13600 | 17200 | 22200 | 26600 | 31500 | 34200 |
| | | 60 | | | 15800 | 19850 | 24850 | 29550 | 32100 |
| | 65 | | | | 18150 | 22950 | 27450 | 29850 | |
| | P | 15 | 3020 | 3030 | 3060 | 3140 | | | |
| | | 20 | 3700 | 3710 | 3750 | 3840 | 3990 | | |
| | | 30 | 4950 | 4970 | 5030 | 5110 | 5240 | 5470 | 5620 |
| | | 40 | 6270 | 6300 | 6360 | 6430 | 6530 | 6700 | 6820 |
| | | 50 | 7930 | 7950 | 8000 | 8040 | 8100 | 8210 | 8290 |
| | | 55 | | 8980 | 9020 | 9040 | 9070 | 9150 | 9210 |
| 60 | | | | 10210 | 10210 | 10210 | 10240 | 10280 | |
| 65 | | | | 11580 | 11550 | 11540 | 11550 | | |
| ZB88KQ | Q | 15 | 23550 | 25400 | 30500 | 36150 | | | |
| | | 20 | 22700 | 24550 | 29600 | 35200 | 41300 | | |
| | | 30 | 20850 | 22600 | 27500 | 32900 | 38850 | 45350 | 48750 |
| | | 40 | 18750 | 20400 | 24950 | 30100 | 35800 | 42000 | 45300 |
| | | 50 | 15100 | 16600 | 22050 | 26800 | 32100 | 37950 | 41050 |
| | | 55 | | 15300 | 19300 | 24950 | 30000 | 35650 | 38650 |
| | | 60 | | | 17650 | 22150 | 27800 | 33150 | 36050 |
| | 65 | | | | 20100 | 25400 | 30500 | 33200 | |
| | P | 15 | 3940 | 3980 | 4120 | 4350 | | | |
| | | 20 | 4470 | 4500 | 4610 | 4800 | 5100 | | |
| | | 30 | 5660 | 5690 | 5770 | 5890 | 6080 | 6410 | 6620 |
| | | 40 | 7120 | 7150 | 7220 | 7290 | 7410 | 7610 | 7760 |
| | | 50 | 8920 | 8960 | 9040 | 9090 | 9150 | 9260 | 9350 |
| | | 55 | | 10030 | 10120 | 10160 | 10210 | 10280 | 10350 |
| 60 | | | | 11320 | 11370 | 11400 | 11450 | 11490 | |
| 65 | | | | 12720 | 12740 | 12760 | 12790 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB95KQ | Q | 15 | 25350 | 27400 | 33200 | 39950 | | | |
| | | 20 | 24350 | 26350 | 31800 | 38200 | 45550 | | |
| | | 30 | 22350 | 24200 | 29350 | 35150 | 41800 | 49350 | 53550 |
| | | 40 | 19550 | 21450 | 26500 | 32050 | 38250 | 45200 | 49000 |
| | | 50 | | | 22450 | 28050 | 34100 | 40700 | 44250 |
| | | 55 | | | | 25350 | 31450 | 38000 | 41500 |
| | | 60 | | | | | 28350 | 34900 | 38400 |
| | 65 | | | | | 24600 | 31250 | 34750 | |
| | P | 15 | 4660 | 4730 | 4990 | 5340 | | | |
| | | 20 | 5170 | 5220 | 5410 | 5680 | 6040 | | |
| | | 30 | 6450 | 6490 | 6590 | 6740 | 6940 | 7200 | 7350 |
| | | 40 | 8040 | 8080 | 8180 | 8280 | 8380 | 8510 | 8580 |
| | | 50 | | | 10120 | 10230 | 10320 | 10380 | 10410 |
| | | 55 | | | | 11350 | 11460 | 11520 | 11530 |
| 60 | | | | | | 12690 | 12770 | 12790 | |
| 65 | | | | | 14030 | 14140 | 14160 | | |
| ZB114KQ | Q | 15 | 30500 | 32950 | 39700 | 47300 | | | |
| | | 20 | 29400 | 31800 | 38400 | 45850 | 54250 | | |
| | | 30 | 26750 | 29050 | 35400 | 42500 | 50450 | 59350 | 64150 |
| | | 40 | 23200 | 25550 | 31700 | 38550 | 46100 | 54500 | 59050 |
| | | 50 | | | 27050 | 33700 | 41000 | 48950 | 53250 |
| | | 55 | | | | 30900 | 38050 | 45850 | 50050 |
| | | 60 | | | | | 34850 | 42500 | 46600 |
| | 65 | | | | | 31350 | 38850 | 42850 | |
| | P | 15 | 5730 | 5790 | 5990 | 6250 | | | |
| | | 20 | 6320 | 6380 | 6550 | 6780 | 7080 | | |
| | | 30 | 7760 | 7790 | 7920 | 8090 | 8330 | 8630 | 8820 |
| | | 40 | 9610 | 9630 | 9710 | 9830 | 9990 | 10220 | 10360 |
| | | 50 | | | 12030 | 12090 | 12190 | 12340 | 12440 |
| | | 55 | | | | 13460 | 13520 | 13630 | 13710 |
| 60 | | | | | | 15020 | 15100 | 15150 | |
| 65 | | | | | 16710 | 16750 | 16780 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

50 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB15KQE | Q | 10 | 3700 | 4500 | 5450 | | | | |
| | | 20 | 3350 | 4050 | 4900 | 5900 | 7000 | | |
| | | 30 | 2950 | 3600 | 4350 | 5250 | 6200 | 7300 | 8550 |
| | | 40 | 2550 | 3150 | 3800 | 4550 | 5400 | 6350 | 7450 |
| | | 50 | 2150 | 2600 | 3150 | 3800 | 4500 | 5350 | 6250 |
| | | 60 | | 2050 | 2500 | 3000 | 3600 | 4250 | 5050 |
| | P | 10 | 730 | 740 | 740 | | | | |
| | | 20 | 920 | 920 | 930 | 930 | 930 | | |
| | | 30 | 1150 | 1150 | 1160 | 1160 | 1160 | 1150 | 1140 |
| | | 40 | 1440 | 1450 | 1450 | 1450 | 1450 | 1450 | 1440 |
| | | 50 | 1800 | 1810 | 1810 | 1810 | 1810 | 1810 | 1800 |
| | | 60 | | 2250 | 2260 | 2260 | 2250 | 2250 | 2240 |
| ZB19KQE | Q | 10 | 4200 | 5100 | 6200 | | | | |
| | | 20 | 3850 | 4700 | 5700 | 6800 | 8150 | | |
| | | 30 | 3450 | 4200 | 5050 | 6100 | 7250 | 8600 | 10100 |
| | | 40 | 3000 | 3650 | 4400 | 5300 | 6300 | 7450 | 8750 |
| | | 50 | 2450 | 3000 | 3650 | 4400 | 5250 | 6200 | 7300 |
| | | 60 | | 2350 | 2850 | 3400 | 4100 | 4900 | 5800 |
| | P | 10 | 900 | 900 | 910 | | | | |
| | | 20 | 1140 | 1140 | 1140 | 1140 | 1140 | | |
| | | 30 | 1430 | 1430 | 1430 | 1430 | 1420 | 1410 | 1400 |
| | | 40 | 1810 | 1810 | 1810 | 1800 | 1790 | 1780 | 1760 |
| | | 50 | 2290 | 2290 | 2290 | 2280 | 2260 | 2240 | 2220 |
| | | 60 | | 2900 | 2890 | 2880 | 2860 | 2830 | 2800 |
| ZB21KQE | Q | 10 | 5350 | 6550 | 7950 | | | | |
| | | 20 | 4900 | 6000 | 7250 | 8700 | 10400 | | |
| | | 30 | 4400 | 5350 | 6500 | 7750 | 9250 | 10950 | 12900 |
| | | 40 | 3800 | 4650 | 5600 | 6750 | 8050 | 9500 | 11200 |
| | | 50 | 3150 | 3850 | 4650 | 5600 | 6700 | 7950 | 9350 |
| | | 60 | | 3000 | 3600 | 4350 | 5250 | 6250 | 7400 |
| | P | 10 | 1150 | 1150 | 1150 | | | | |
| | | 20 | 1450 | 1450 | 1450 | 1450 | 1450 | | |
| | | 30 | 1830 | 1830 | 1820 | 1820 | 1810 | 1800 | 1790 |
| | | 40 | 2310 | 2310 | 2300 | 2290 | 2280 | 2260 | 2240 |
| | | 50 | 2920 | 2920 | 2910 | 2900 | 2880 | 2860 | 2820 |
| | | 60 | | 3690 | 3680 | 3660 | 3640 | 3610 | 3570 |
| ZB26KQE | Q | 10 | 5950 | 7300 | 8900 | | | | |
| | | 20 | 5350 | 6600 | 8050 | 9800 | 11750 | | |
| | | 30 | 4700 | 5800 | 7100 | 8650 | 10400 | 12450 | 14800 |
| | | 40 | 3950 | 4900 | 6050 | 7400 | 8950 | 10750 | 12850 |
| | | 50 | 3100 | 3900 | 4900 | 6000 | 7350 | 8900 | 10750 |
| | | 60 | | 2800 | 3600 | 4500 | 5650 | 6950 | 8500 |
| | P | 10 | 1490 | 1470 | 1440 | | | | |
| | | 20 | 1880 | 1850 | 1810 | 1770 | 1730 | | |
| | | 30 | 2380 | 2330 | 2280 | 2230 | 2160 | 2100 | 2020 |
| | | 40 | 3000 | 2950 | 2880 | 2810 | 2720 | 2630 | 2530 |
| | | 50 | 3800 | 3730 | 3640 | 3550 | 3440 | 3320 | 3190 |
| | | 60 | | 4710 | 4600 | 4480 | 4350 | 4200 | 4040 |
| ZB29KQE | Q | 10 | 7100 | 8700 | 10600 | | | | |
| | | 20 | 6450 | 7900 | 9600 | 11550 | 13800 | | |
| | | 30 | 5700 | 7050 | 8550 | 10300 | 12250 | 14500 | 17000 |
| | | 40 | 4900 | 6050 | 7400 | 8900 | 10650 | 12550 | 14750 |
| | | 50 | 4000 | 5000 | 6150 | 7400 | 8850 | 10500 | 12350 |
| | | 60 | | 3800 | 4750 | 5800 | 7000 | 8300 | 9800 |
| | P | 10 | 1630 | 1660 | 1700 | | | | |
| | | 20 | 1930 | 1960 | 1990 | 2020 | 2070 | | |
| | | 30 | 2330 | 2350 | 2370 | 2400 | 2440 | 2480 | 2540 |
| | | 40 | 2830 | 2850 | 2870 | 2890 | 2910 | 2950 | 2990 |
| | | 50 | 3440 | 3470 | 3480 | 3500 | 3520 | 3550 | 3580 |
| | | 60 | | 4210 | 4240 | 4260 | 4270 | 4290 | 4320 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB15KQE | Q | 10 | 3650 | 4450 | 5450 | | | | |
| | | 20 | 3300 | 4050 | 4950 | 5950 | 7150 | | |
| | | 30 | 2900 | 3550 | 4350 | 5250 | 6300 | 7450 | 8800 |
| | | 40 | 2400 | 3000 | 3700 | 4450 | 5350 | 6350 | 7450 |
| | | 50 | 1850 | 2400 | 2950 | 3600 | 4300 | 5150 | 6100 |
| | | 60 | | 1650 | 2150 | 2650 | 3250 | 3900 | 4600 |
| | P | 10 | 780 | 750 | 700 | | | | |
| | | 20 | 1000 | 980 | 950 | 920 | 880 | | |
| | | 30 | 1270 | 1250 | 1230 | 1200 | 1170 | 1160 | 1160 |
| | | 40 | 1670 | 1630 | 1590 | 1550 | 1510 | 1490 | 1490 |
| | | 50 | 2260 | 2180 | 2100 | 2030 | 1970 | 1920 | 1900 |
| | | 60 | | 2970 | 2840 | 2710 | 2610 | 2520 | 2460 |
| ZB19KQE | Q | 10 | 4350 | 5350 | 6500 | | | | |
| | | 20 | 4000 | 4900 | 5900 | 7100 | 8500 | | |
| | | 30 | 3600 | 4350 | 5300 | 6350 | 7550 | 8950 | 10500 |
| | | 40 | 3100 | 3800 | 4600 | 5500 | 6550 | 7750 | 9150 |
| | | 50 | 2550 | 3150 | 3800 | 4600 | 5450 | 6500 | 7650 |
| | | 60 | | 2450 | 2950 | 3550 | 4300 | 5100 | 6050 |
| | P | 10 | 930 | 930 | 930 | | | | |
| | | 20 | 1170 | 1170 | 1170 | 1170 | 1170 | | |
| | | 30 | 1480 | 1480 | 1480 | 1470 | 1470 | 1460 | 1450 |
| | | 40 | 1870 | 1870 | 1860 | 1860 | 1840 | 1830 | 1810 |
| | | 50 | 2360 | 2360 | 2360 | 2350 | 2330 | 2310 | 2290 |
| | | 60 | | 2990 | 2980 | 2960 | 2940 | 2920 | 2890 |
| ZB21KQE | Q | 10 | 5250 | 6400 | 7800 | | | | |
| | | 20 | 4800 | 5850 | 7100 | 8550 | 10200 | | |
| | | 30 | 4300 | 5250 | 6350 | 7600 | 9050 | 10750 | 12600 |
| | | 40 | 3700 | 4550 | 5500 | 6600 | 7850 | 9300 | 10950 |
| | | 50 | 3100 | 3750 | 4550 | 5500 | 6550 | 7750 | 9150 |
| | | 60 | | 2900 | 3550 | 4300 | 5150 | 6100 | 7250 |
| | P | 10 | 1110 | 1110 | 1120 | | | | |
| | | 20 | 1400 | 1400 | 1400 | 1400 | 1400 | | |
| | | 30 | 1770 | 1770 | 1770 | 1760 | 1750 | 1750 | 1730 |
| | | 40 | 2240 | 2240 | 2230 | 2220 | 2210 | 2190 | 2170 |
| | | 50 | 2830 | 2830 | 2820 | 2810 | 2790 | 2770 | 2740 |
| | | 60 | | 3580 | 3570 | 3550 | 3530 | 3490 | 3460 |
| ZB26KQE | Q | 10 | 6100 | 7500 | 9100 | | | | |
| | | 20 | 5600 | 6850 | 8300 | 9950 | 11900 | | |
| | | 30 | 5000 | 6100 | 7400 | 8900 | 10600 | 12550 | 14750 |
| | | 40 | 4350 | 5300 | 6400 | 7700 | 9200 | 10900 | 12800 |
| | | 50 | 3600 | 4400 | 5350 | 6400 | 7650 | 9100 | 10700 |
| | | 60 | | 3400 | 4150 | 5000 | 6000 | 7150 | 8450 |
| | P | 10 | 1300 | 1300 | 1310 | | | | |
| | | 20 | 1640 | 1640 | 1640 | 1640 | 1640 | | |
| | | 30 | 2070 | 2070 | 2070 | 2060 | 2050 | 2040 | 2020 |
| | | 40 | 2610 | 2610 | 2610 | 2600 | 2580 | 2560 | 2540 |
| | | 50 | 3310 | 3310 | 3300 | 3280 | 3260 | 3240 | 3200 |
| | | 60 | | 4180 | 4170 | 4150 | 4120 | 4090 | 4040 |
| ZB29KQE | Q | 10 | 7100 | 8700 | 10550 | | | | |
| | | 20 | 6500 | 7950 | 9600 | 11550 | 13800 | | |
| | | 30 | 5800 | 7100 | 8600 | 10300 | 12300 | 14550 | 17100 |
| | | 40 | 5050 | 6150 | 7450 | 8950 | 10650 | 12600 | 14850 |
| | | 50 | 4150 | 5100 | 6200 | 7450 | 8900 | 10550 | 12400 |
| | | 60 | | 3950 | 4800 | 5800 | 6950 | 8300 | 9800 |
| | P | 10 | 1470 | 1480 | 1480 | | | | |
| | | 20 | 1860 | 1860 | 1860 | 1860 | 1860 | | |
| | | 30 | 2340 | 2350 | 2340 | 2340 | 2330 | 2310 | 2300 |
| | | 40 | 2960 | 2960 | 2960 | 2950 | 2930 | 2910 | 2880 |
| | | 50 | 3750 | 3750 | 3740 | 3730 | 3700 | 3670 | 3630 |
| | | 60 | | 4750 | 4730 | 4710 | 4680 | 4630 | 4580 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

50 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB38KQE | Q | 10 | 8950 | 10950 | 13300 | | | | |
| | | 20 | 8200 | 10000 | 12150 | 14600 | 17400 | | |
| | | 30 | 7350 | 8950 | 10850 | 13000 | 15500 | 18350 | 21550 |
| | | 40 | 6350 | 7750 | 9400 | 11300 | 13450 | 15900 | 18700 |
| | | 50 | 5250 | 6450 | 7800 | 9400 | 11200 | 13300 | 15650 |
| | | 60 | | 4950 | 6050 | 7300 | 8750 | 10450 | 12400 |
| | P | 10 | 1860 | 1870 | 1870 | | | | |
| | | 20 | 2350 | 2350 | 2350 | 2350 | 2350 | | |
| | | 30 | 2960 | 2960 | 2960 | 2950 | 2940 | 2920 | 2900 |
| | | 40 | 3740 | 3740 | 3730 | 3720 | 3700 | 3670 | 3630 |
| | | 50 | 4740 | 4740 | 4720 | 4700 | 4670 | 4630 | 4580 |
| | | 60 | 0 | 5990 | 5970 | 5940 | 5900 | 5850 | 5790 |
| ZB45KQE | Q | 10 | 10450 | 12800 | 15550 | | | | |
| | | 20 | 9600 | 11750 | 14200 | 17100 | 20400 | | |
| | | 30 | 8600 | 10500 | 12700 | 15250 | 18150 | 21500 | 25250 |
| | | 40 | 7450 | 9100 | 11000 | 13200 | 15750 | 18650 | 21900 |
| | | 50 | 6150 | 7550 | 9150 | 11000 | 13100 | 15550 | 18350 |
| | | 60 | | 5800 | 7100 | 8550 | 10250 | 12200 | 14500 |
| | P | 10 | 2110 | 2110 | 2120 | | | | |
| | | 20 | 2660 | 2660 | 2660 | 2660 | 2660 | | |
| | | 30 | 3350 | 3350 | 3350 | 3340 | 3320 | 3310 | 3280 |
| | | 40 | 4240 | 4240 | 4230 | 4210 | 4190 | 4150 | 4110 |
| | | 50 | 5360 | 5360 | 5350 | 5320 | 5290 | 5240 | 5190 |
| | | 60 | | 6780 | 6760 | 6730 | 6680 | 6620 | 6550 |
| ZB48KQE | Q | 10 | 11500 | 14100 | 17100 | | | | |
| | | 20 | 10550 | 12900 | 15650 | 18800 | 22400 | | |
| | | 30 | 9450 | 11550 | 13950 | 16750 | 20000 | 23650 | 27800 |
| | | 40 | 8150 | 10000 | 12100 | 14500 | 17300 | 20500 | 24100 |
| | | 50 | 6750 | 8300 | 10050 | 12050 | 14400 | 17100 | 20150 |
| | | 60 | | 6400 | 7800 | 9400 | 11300 | 13450 | 15950 |
| | P | 10 | 2320 | 2320 | 2330 | | | | |
| | | 20 | 2920 | 2930 | 2930 | 2930 | 2920 | | |
| | | 30 | 3690 | 3690 | 3680 | 3670 | 3660 | 3640 | 3610 |
| | | 40 | 4660 | 4660 | 4650 | 4630 | 4600 | 4570 | 4530 |
| | | 50 | 5900 | 5900 | 5880 | 5860 | 5820 | 5770 | 5700 |
| | | 60 | | 7460 | 7440 | 7400 | 7350 | 7280 | 7200 |
| ZB58KQE | Q | 10 | 13750 | 16750 | 20300 | | | | |
| | | 20 | 12450 | 15250 | 18500 | 22250 | 26600 | | |
| | | 30 | 11100 | 13650 | 16600 | 19950 | 23800 | 28200 | 33200 |
| | | 40 | 9450 | 11850 | 14500 | 17450 | 20800 | 24600 | 28900 |
| | | 50 | 7400 | 9650 | 12000 | 14600 | 17500 | 20700 | 24350 |
| | | 60 | | 6850 | 9000 | 11250 | 13700 | 16350 | 19300 |
| | P | 10 | 3000 | 3080 | 3140 | | | | |
| | | 20 | 3640 | 3730 | 3820 | 3870 | 3870 | | |
| | | 30 | 4480 | 4540 | 4620 | 4690 | 4730 | 4710 | 4600 |
| | | 40 | 5630 | 5630 | 5670 | 5720 | 5770 | 5770 | 5720 |
| | | 50 | 7210 | 7120 | 7080 | 7090 | 7100 | 7100 | 7060 |
| | | 60 | | 9130 | 8980 | 8900 | 8850 | 8800 | 8740 |
| ZB66KQE | Q | 10 | 15700 | 19200 | 23350 | | | | |
| | | 20 | 14300 | 17450 | 21150 | 25450 | 30400 | | |
| | | 30 | 12750 | 15550 | 18800 | 22550 | 26900 | 31900 | 37550 |
| | | 40 | 11050 | 13500 | 16350 | 19550 | 23250 | 27500 | 32350 |
| | | 50 | 9100 | 11250 | 13650 | 16350 | 19450 | 22950 | 27000 |
| | | 60 | | 8650 | 10650 | 12850 | 15350 | 18150 | 21400 |
| | P | 10 | 3370 | 3450 | 3550 | | | | |
| | | 20 | 4100 | 4170 | 4260 | 4370 | 4510 | | |
| | | 30 | 5030 | 5090 | 5160 | 5250 | 5350 | 5480 | 5620 |
| | | 40 | 6240 | 6290 | 6340 | 6390 | 6460 | 6540 | 6630 |
| | | 50 | 7830 | 7850 | 7880 | 7900 | 7920 | 7950 | 7990 |
| | | 60 | | 9890 | 9870 | 9850 | 9830 | 9800 | 9780 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|----------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB76KQE | Q | 10 | 18400 | 22400 | 27150 | | | | |
| | | 20 | 16700 | 20350 | 24700 | 29700 | 35450 | | |
| | | 30 | 14900 | 18250 | 22150 | 26600 | 31700 | 37450 | 44000 |
| | | 40 | 12900 | 15900 | 19350 | 23250 | 27650 | 32650 | 38300 |
| | | 50 | 10600 | 13250 | 16200 | 19500 | 23250 | 27450 | 32200 |
| | | 60 | | 10050 | 12550 | 15250 | 18300 | 21750 | 25550 |
| | P | 10 | 3930 | 4030 | 4110 | | | | |
| | | 20 | 4750 | 4870 | 4980 | 5070 | 5130 | | |
| | | 30 | 5820 | 5930 | 6030 | 6130 | 6220 | 6270 | 6300 |
| | | 40 | 7230 | 7310 | 7390 | 7480 | 7560 | 7620 | 7650 |
| | | 50 | 9100 | 9120 | 9160 | 9210 | 9260 | 9300 | 9330 |
| | | 60 | | 11480 | 11440 | 11430 | 11430 | 11430 | 11430 |
| ZB95KQE | Q | 10 | 22750 | 27700 | 33700 | | | | |
| | | 20 | 20800 | 25300 | 30500 | 36700 | 43900 | | |
| | | 30 | 18550 | 22700 | 27400 | 32750 | 38950 | 46150 | 54500 |
| | | 40 | 15600 | 19600 | 23850 | 28550 | 33900 | 40000 | 47050 |
| | | 50 | | 15500 | 19500 | 23750 | 28350 | 33550 | 39400 |
| | | 60 | | | 13950 | 17850 | 21900 | 26300 | 31150 |
| | P | 10 | 4880 | 5050 | 5220 | | | | |
| | | 20 | 5980 | 6120 | 6290 | 6450 | 6590 | | |
| | | 30 | 7440 | 7540 | 7670 | 7810 | 7940 | 8040 | 8110 |
| | | 40 | 9400 | 9430 | 9500 | 9590 | 9690 | 9780 | 9830 |
| | | 50 | | 11940 | 11920 | 11940 | 11980 | 11980 | 12020 |
| | | 60 | | | 15070 | 14990 | 14950 | 14920 | 14880 |
| ZB114KQE | Q | 10 | 27350 | 33300 | 40300 | | | | |
| | | 20 | 24850 | 30350 | 36700 | 44050 | 52450 | | |
| | | 30 | 21900 | 27000 | 32750 | 39350 | 46800 | 55350 | 65050 |
| | | 40 | 18300 | 23050 | 28250 | 34100 | 40700 | 48200 | 56700 |
| | | 50 | | 18250 | 23000 | 28200 | 33950 | 40450 | 47800 |
| | | 60 | | | 16750 | 21350 | 26350 | 31900 | 38100 |
| | P | 10 | 5930 | 6080 | 6240 | | | | |
| | | 20 | 7240 | 7390 | 7540 | 7710 | 7880 | | |
| | | 30 | 8940 | 9050 | 9170 | 9310 | 9450 | 9610 | 9780 |
| | | 40 | 11220 | 11260 | 11310 | 11380 | 11470 | 11570 | 11690 |
| | | 50 | | 14200 | 14150 | 14120 | 14110 | 14130 | 14160 |
| | | 60 | | | 17870 | 17710 | 17570 | 17460 | 17380 |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

50 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|------|------|------|------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB15KQE | Q | 30 | 1900 | 2400 | 3000 | 3700 | 4500 | 5400 | |
| | | 35 | 1800 | 2300 | 2900 | 3500 | 4300 | 5200 | |
| | | 45 | 1600 | 2000 | 2600 | 3200 | 3900 | 4700 | 5600 |
| | | 55 | | 1700 | 2200 | 2700 | 3400 | 4100 | 4900 |
| | | 65 | | | 1800 | 2300 | 2900 | 3500 | 4200 |
| | | 75 | | | | 1900 | 2400 | 3000 | 3500 |
| | | ZB15KQE | P | 30 | 800 | 800 | 800 | 800 | 800 |
| 35 | 800 | | | 800 | 800 | 900 | 900 | 900 | |
| 45 | 1000 | | | 1000 | 1000 | 1100 | 1100 | 1100 | 1100 |
| 55 | | | | 1300 | 1300 | 1300 | 1300 | 1300 | 1300 |
| 65 | | | | | 1600 | 1600 | 1600 | 1600 | 1600 |
| 75 | | | | | | 2000 | 2000 | 2000 | 2000 |
| ZB19KQE | Q | | | 30 | 2200 | 2800 | 3500 | 4300 | 5200 |
| | | 35 | 2000 | 2700 | 3300 | 4100 | 5000 | 6000 | |
| | | 45 | 1800 | 2300 | 3000 | 3700 | 4500 | 5400 | 6400 |
| | | 55 | | 2000 | 2500 | 3100 | 3900 | 4700 | 5700 |
| | | 65 | | | 2100 | 2700 | 3300 | 4100 | 4900 |
| | | 75 | | | | 2200 | 2700 | 3400 | 4000 |
| | | ZB19KQE | P | 30 | 900 | 900 | 900 | 900 | 900 |
| 35 | 1000 | | | 1000 | 1000 | 1000 | 1000 | 1000 | |
| 45 | 1200 | | | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 |
| 55 | | | | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 |
| 65 | | | | | 1800 | 1800 | 1900 | 1900 | 1900 |
| 75 | | | | | | 2300 | 2300 | 2300 | 2300 |
| ZB21KQE | Q | | | 30 | 2800 | 3500 | 4400 | 5400 | 6500 |
| | | 35 | 2700 | 3300 | 4200 | 5100 | 6200 | 7500 | |
| | | 45 | 2300 | 2900 | 3700 | 4600 | 5600 | 6800 | 8100 |
| | | 55 | | 2500 | 3200 | 4000 | 4900 | 6000 | 7200 |
| | | 65 | | | 2700 | 3400 | 4200 | 5100 | 6200 |
| | | 75 | | | | 2700 | 3500 | 4300 | 5100 |
| | | ZB21KQE | P | 30 | 1100 | 1100 | 1100 | 1100 | 1100 |
| 35 | 1200 | | | 1200 | 1200 | 1200 | 1200 | 1200 | |
| 45 | 1500 | | | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 |
| 55 | | | | 1800 | 1800 | 1800 | 1900 | 1900 | 1900 |
| 65 | | | | | 2200 | 2300 | 2300 | 2300 | 2300 |
| 75 | | | | | | 2800 | 2800 | 2800 | 2900 |
| ZB26KQE | Q | | | 30 | 3200 | 4100 | 5100 | 6200 | 7600 |
| | | 35 | 3000 | 3900 | 4800 | 5900 | 7200 | 8700 | |
| | | 45 | 2600 | 3300 | 4300 | 5300 | 6500 | 7800 | 9400 |
| | | 55 | | 2900 | 3700 | 4600 | 5700 | 6900 | 8300 |
| | | 65 | | | 3100 | 3900 | 4900 | 5900 | 7100 |
| | | 75 | | | | 3200 | 4000 | 5000 | 5900 |
| | | ZB26KQE | P | 30 | 1200 | 1200 | 1200 | 1200 | 1200 |
| 35 | 1300 | | | 1300 | 1400 | 1400 | 1400 | 1400 | |
| 45 | 1700 | | | 1700 | 1700 | 1700 | 1700 | 1700 | 1700 |
| 55 | | | | 2100 | 2100 | 2100 | 2100 | 2100 | 2100 |
| 65 | | | | | 2600 | 2600 | 2600 | 2600 | 2600 |
| 75 | | | | | | 3200 | 3200 | 3200 | 3300 |
| ZB29KQE | Q | | | 30 | 3850 | 4750 | 5900 | 7200 | 8750 |
| | | 35 | 3500 | 4500 | 5600 | 6850 | 8300 | 10050 | |
| | | 45 | 3050 | 3900 | 5000 | 6100 | 7450 | 9000 | 10100 |
| | | 55 | | 3300 | 4200 | 5250 | 6550 | 7950 | 8950 |
| | | 65 | | | 4000 | 4450 | 5550 | 6800 | 7650 |
| | | 75 | | | | 3600 | 4550 | 5600 | 6250 |
| | | ZB29KQE | P | 30 | 1370 | 1380 | 1390 | 1400 | 1410 |
| 35 | 1540 | | | 1550 | 1560 | 1570 | 1580 | 1590 | |
| 45 | 1940 | | | 1940 | 1950 | 1960 | 1970 | 1980 | 1990 |
| 55 | | | | 2420 | 2430 | 2440 | 2440 | 2450 | 2460 |
| 65 | | | | | 3020 | 3020 | 3030 | 3040 | 3050 |
| 75 | | | | | | 3750 | 3760 | 3770 | 3770 |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K

Performance Data

50 Hz

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|-------|-------|-------|-------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB38KQE | Q | 30 | 4700 | 5900 | 7400 | 9100 | 11100 | 13300 | |
| | | 35 | 4300 | 5600 | 7000 | 8600 | 10500 | 12700 | |
| | | 45 | 3800 | 4900 | 6300 | 7800 | 9400 | 11400 | 13700 |
| | | 55 | | 4200 | 5400 | 6700 | 8300 | 10100 | 12100 |
| | | 65 | | | 4600 | 5700 | 7100 | 8700 | 10400 |
| | | 75 | | | | 4600 | 5800 | 7200 | 8900 |
| | P | 30 | 1700 | 1700 | 1700 | 1800 | 1800 | 1800 | |
| | | 35 | 1900 | 1900 | 1900 | 2000 | 2000 | 2000 | |
| | | 45 | 2300 | 2400 | 2400 | 2400 | 2400 | 2500 | 2500 |
| | | 55 | | 3000 | 3000 | 3000 | 3000 | 3000 | 3100 |
| | | 65 | | | 3700 | 3700 | 3700 | 3800 | 3800 |
| | | 75 | | | | 4700 | 4700 | 4700 | 4700 |
| ZB45KQE | Q | 30 | 5700 | 7100 | 8900 | 10900 | 13300 | 15900 | |
| | | 35 | 5200 | 6800 | 8500 | 10400 | 12700 | 15200 | |
| | | 45 | 4500 | 5800 | 7500 | 9300 | 11400 | 13700 | 16300 |
| | | 55 | | 5000 | 6300 | 8000 | 10000 | 12100 | 14400 |
| | | 65 | | | 5300 | 6700 | 8400 | 10300 | 12300 |
| | | 75 | | | | 5400 | 6800 | 8500 | 10100 |
| | P | 30 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | |
| | | 35 | 2200 | 2200 | 2200 | 2200 | 2300 | 2300 | |
| | | 45 | 2700 | 2700 | 2800 | 2800 | 2800 | 2800 | 2800 |
| | | 55 | | 3400 | 3400 | 3500 | 3500 | 3500 | 3500 |
| | | 65 | | | 4300 | 4300 | 4300 | 4400 | 4400 |
| | | 75 | | | | 5400 | 5400 | 5400 | 5400 |
| ZB48KQE | Q | 30 | 6400 | 8050 | 9900 | 12150 | 14700 | 17600 | |
| | | 35 | 5900 | 7650 | 9450 | 11550 | 14000 | 16900 | |
| | | 45 | 5200 | 6600 | 8450 | 10350 | 12550 | 15100 | 17300 |
| | | 55 | | 5700 | 7200 | 8950 | 11050 | 13350 | 15250 |
| | | 65 | | | 6050 | 7600 | 9450 | 11450 | 13100 |
| | | 75 | | | | 6200 | 7800 | 9600 | 10850 |
| | P | 30 | 2280 | 2290 | 2300 | 2310 | 2330 | 2370 | |
| | | 35 | 2540 | 2560 | 2570 | 2590 | 2610 | 2650 | |
| | | 45 | 3170 | 3190 | 3210 | 3220 | 3250 | 3290 | 3360 |
| | | 55 | | 4000 | 4010 | 4020 | 4040 | 4080 | 4150 |
| | | 65 | | | 5020 | 5030 | 5040 | 5050 | 5120 |
| | | 75 | | | | 6280 | 6290 | 6300 | 6340 |
| ZB58KQE | Q | 30 | 7450 | 9200 | 11200 | 13400 | 15850 | 18600 | |
| | | 35 | 6250 | 8700 | 10600 | 12700 | 15100 | 17650 | |
| | | 45 | 5400 | 6900 | 9350 | 11300 | 13500 | 15750 | 18300 |
| | | 55 | | 5900 | 7450 | 9300 | 11650 | 13750 | 16000 |
| | | 65 | | | 6150 | 7750 | 9650 | 11600 | 13500 |
| | | 75 | | | | 6100 | 7700 | 9550 | 10900 |
| | P | 30 | 2690 | 2710 | 2760 | 2820 | 2880 | 2910 | |
| | | 35 | 3010 | 3030 | 3070 | 3130 | 3180 | 3190 | |
| | | 45 | 3720 | 3750 | 3800 | 3850 | 3890 | 3880 | 3820 |
| | | 55 | | 4590 | 4660 | 4720 | 4760 | 4750 | 4670 |
| | | 65 | | | 5640 | 5730 | 5790 | 5790 | 5710 |
| | | 75 | | | | 6880 | 6970 | 7000 | 6940 |
| ZB66KQE | Q | 30 | 8550 | 10500 | 12750 | 15300 | 18150 | 21200 | |
| | | 35 | 7150 | 9950 | 12100 | 14550 | 17250 | 20200 | |
| | | 45 | 6200 | 7900 | 10700 | 12900 | 15450 | 18050 | 20900 |
| | | 55 | | 6700 | 8500 | 10600 | 13350 | 15700 | 18250 |
| | | 65 | | | 7000 | 8850 | 11000 | 13250 | 15400 |
| | | 75 | | | | 7000 | 8800 | 10950 | 12450 |
| | P | 30 | 3000 | 3020 | 3080 | 3150 | 3210 | 3250 | |
| | | 35 | 3360 | 3380 | 3430 | 3490 | 3540 | 3560 | |
| | | 45 | 4150 | 4190 | 4250 | 4300 | 4340 | 4340 | 4270 |
| | | 55 | | 5120 | 5210 | 5280 | 5320 | 5310 | 5220 |
| | | 65 | | | 6300 | 6410 | 6470 | 6470 | 6390 |
| | | 75 | | | | 7690 | 7790 | 7820 | 7760 |

* Max return gas temperature of 18.3°C in non shaded region
 * Max Suction superheat of 11K only in shaded region
 * Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

50 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|-------|-------|-------|-------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB76KQE | Q | 30 | 9800 | 12050 | 14650 | 17600 | 20850 | 24350 | |
| | | 35 | 8150 | 11400 | 13900 | 16700 | 19800 | 23150 | |
| | | 45 | 7100 | 9000 | 12250 | 14800 | 17700 | 20650 | 23950 |
| | | 55 | | 7700 | 9700 | 12150 | 15250 | 17950 | 20900 |
| | | 65 | | | 8050 | 10100 | 12550 | 15150 | 17650 |
| | | 75 | | | | 8000 | 10050 | 12500 | 14300 |
| | | 30 | 3520 | 3550 | 3610 | 3700 | 3770 | 3800 | |
| | P | 35 | 3940 | 3960 | 4020 | 4100 | 4150 | 4160 | |
| | | 45 | 4870 | 4900 | 4970 | 5040 | 5080 | 5070 | 4970 |
| | | 55 | | 5990 | 6080 | 6160 | 6200 | 6190 | 6080 |
| | | 65 | | | 7350 | 7460 | 7540 | 7540 | 7440 |
| | | 75 | | | | 8950 | 9070 | 9110 | 9040 |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|------|------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB15KQ | Q | 15 | 5800 | 6250 | 7450 | 8850 | | | |
| | | 20 | 5500 | 5900 | 7050 | 8400 | 9900 | | |
| | | 30 | 4300 | 4650 | 5650 | 6750 | 8050 | 9550 | 10400 |
| | | 40 | 3900 | 4250 | 5150 | 6200 | 7350 | 8750 | 9550 |
| | | 50 | 3200 | 3500 | 4600 | 5550 | 6650 | 7950 | 8650 |
| | | 55 | | 3150 | 3850 | 4850 | 5750 | 6800 | 7350 |
| | | 60 | | | 3400 | 4150 | 5100 | 6050 | 6550 |
| | 65 | | | | 3550 | 4450 | 5250 | 5700 | |
| | P | 15 | 1060 | 1060 | 1070 | 1060 | | | |
| | | 20 | 1190 | 1190 | 1190 | 1190 | 1180 | | |
| | | 30 | 1370 | 1360 | 1360 | 1370 | 1390 | 1400 | 1400 |
| | | 40 | 1660 | 1660 | 1650 | 1660 | 1670 | 1670 | 1660 |
| | | 50 | 2050 | 2040 | 2030 | 2030 | 2030 | 2020 | 2010 |
| | | 55 | | 2590 | 2590 | 2590 | 2580 | 2570 | 2560 |
| 60 | | | | 2890 | 2890 | 2880 | 2870 | 2860 | |
| 65 | | | | 3220 | 3210 | 3190 | 3180 | | |
| ZB19KQ | Q | 15 | 5600 | 6050 | 7300 | 8700 | | | |
| | | 20 | 5350 | 5800 | 7050 | 8400 | 10000 | | |
| | | 30 | 4950 | 5350 | 6500 | 7800 | 9250 | 11000 | 11950 |
| | | 40 | 4500 | 4900 | 5950 | 7100 | 8500 | 10100 | 11000 |
| | | 50 | 3650 | 4050 | 5300 | 6400 | 7650 | 9150 | 9950 |
| | | 55 | | 3750 | 4700 | 6000 | 7200 | 8600 | 9400 |
| | | 60 | | | 4350 | 5400 | 6750 | 8100 | 8850 |
| | 65 | | | | 5000 | 6250 | 7500 | 8250 | |
| | P | 15 | 1250 | 1250 | 1260 | 1280 | | | |
| | | 20 | 1370 | 1370 | 1380 | 1400 | 1420 | | |
| | | 30 | 1660 | 1650 | 1650 | 1670 | 1680 | 1690 | 1700 |
| | | 40 | 2020 | 2010 | 2000 | 2010 | 2020 | 2020 | 2020 |
| | | 50 | 2480 | 2470 | 2460 | 2460 | 2460 | 2450 | 2440 |
| | | 55 | | 2750 | 2730 | 2730 | 2720 | 2710 | 2700 |
| 60 | | | | 3050 | 3040 | 3030 | 3010 | 2990 | |
| 65 | | | | 3390 | 3370 | 3340 | 3320 | | |
| ZB21KQ | Q | 15 | 7050 | 7600 | 9200 | 11000 | | | |
| | | 20 | 6750 | 7350 | 8850 | 10600 | 12600 | | |
| | | 30 | 6200 | 6750 | 8200 | 9800 | 11700 | 13850 | 15100 |
| | | 40 | 5650 | 6150 | 7500 | 9000 | 10700 | 12750 | 13900 |
| | | 50 | 4600 | 5100 | 6700 | 8100 | 9650 | 11500 | 12550 |
| | | 55 | | 4750 | 5950 | 7600 | 9100 | 10850 | 11900 |
| | | 60 | | | 5500 | 6800 | 8500 | 10200 | 11150 |
| | 65 | | | | 6300 | 7900 | 9450 | 10400 | |
| | P | 15 | 1590 | 1590 | 1600 | 1630 | | | |
| | | 20 | 1750 | 1740 | 1750 | 1780 | 1810 | | |
| | | 30 | 2110 | 2100 | 2100 | 2120 | 2140 | 2160 | 2160 |
| | | 40 | 2570 | 2560 | 2550 | 2560 | 2570 | 2570 | 2570 |
| | | 50 | 3160 | 3150 | 3130 | 3130 | 3130 | 3120 | 3100 |
| | | 55 | | 3500 | 3480 | 3470 | 3470 | 3450 | 3430 |
| 60 | | | | 3880 | 3870 | 3850 | 3830 | 3810 | |
| 65 | | | | 4310 | 4290 | 4260 | 4230 | | |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling OK

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB26KQ | Q | 15 | 8100 | 8800 | 10600 | 12700 | | | |
| | | 20 | 7800 | 8450 | 10250 | 12250 | 14550 | | |
| | | 30 | 7200 | 7800 | 9450 | 11350 | 13500 | 16000 | 17450 |
| | | 40 | 6500 | 7100 | 8650 | 10350 | 12350 | 14700 | 16050 |
| | | 50 | 5350 | 5850 | 7750 | 9350 | 11150 | 13300 | 14500 |
| | | 55 | | 5450 | 6850 | 8750 | 10500 | 12550 | 13700 |
| | | 60 | | | 6350 | 7850 | 9800 | 11750 | 12850 |
| | 65 | | | | 7250 | 9100 | 10950 | 12000 | |
| | P | 15 | 1820 | 1820 | 1830 | 1860 | | | |
| | | 20 | 2000 | 1990 | 2000 | 2030 | 2060 | | |
| | | 30 | 2410 | 2400 | 2400 | 2420 | 2450 | 2460 | 2460 |
| | | 40 | 2930 | 2920 | 2910 | 2920 | 2930 | 2940 | 2930 |
| | | 50 | 3610 | 3590 | 3570 | 3570 | 3570 | 3560 | 3540 |
| | | 55 | | 4000 | 3970 | 3970 | 3960 | 3940 | 3920 |
| 60 | | | | 4430 | 4410 | 4400 | 4370 | 4350 | |
| 65 | | | | 4920 | 4900 | 4860 | 4830 | | |
| ZB29KQ | Q | 15 | 9500 | 10300 | 12400 | 14550 | | | |
| | | 20 | 9150 | 10000 | 12050 | 14250 | 16650 | | |
| | | 30 | 8450 | 9250 | 11250 | 13400 | 15800 | 18550 | 20150 |
| | | 40 | 7700 | 8400 | 10250 | 12250 | 14550 | 17300 | 18850 |
| | | 50 | 6500 | 7100 | 9250 | 11050 | 13150 | 15700 | 17200 |
| | | 55 | | 6800 | 8300 | 10400 | 12400 | 14800 | 16250 |
| | | 60 | | | 7850 | 9450 | 11600 | 13900 | 15250 |
| | 65 | | | | 8850 | 10850 | 12950 | 14250 | |
| | P | 15 | 2100 | 2120 | 2180 | 2250 | | | |
| | | 20 | 2280 | 2300 | 2350 | 2420 | 2480 | | |
| | | 30 | 2710 | 2720 | 2770 | 2820 | 2860 | 2900 | 2910 |
| | | 40 | 3220 | 3240 | 3290 | 3330 | 3370 | 3400 | 3410 |
| | | 50 | 3860 | 3880 | 3940 | 3990 | 4030 | 4060 | 4060 |
| | | 55 | | 4260 | 4320 | 4380 | 4420 | 4450 | 4460 |
| 60 | | | | 4740 | 4810 | 4860 | 4900 | 4900 | |
| 65 | | | | 5290 | 5350 | 5390 | 5400 | | |
| ZB38KQ | Q | 15 | 12000 | 12700 | 15150 | 18100 | | | |
| | | 20 | 11400 | 12100 | 14450 | 17400 | 20400 | | |
| | | 30 | 10400 | 11000 | 13200 | 16100 | 19100 | 21900 | 23000 |
| | | 40 | 9450 | 9950 | 12000 | 14750 | 17750 | 20550 | 21750 |
| | | 50 | 7700 | 8150 | 10550 | 13150 | 16100 | 18950 | 20150 |
| | | 55 | | 7450 | 9150 | 12250 | 15100 | 17950 | 19150 |
| | | 60 | | | 8250 | 10750 | 13950 | 16750 | 18000 |
| | 65 | | | | 9550 | 12650 | 15400 | 16650 | |
| | P | 15 | 2500 | 2540 | 2660 | 2780 | | | |
| | | 20 | 2720 | 2750 | 2860 | 2970 | 3060 | | |
| | | 30 | 3270 | 3290 | 3360 | 3460 | 3530 | 3560 | 3540 |
| | | 40 | 3970 | 3980 | 4030 | 4120 | 4180 | 4210 | 4190 |
| | | 50 | 4830 | 4840 | 4890 | 4970 | 5040 | 5070 | 5060 |
| | | 55 | | 5340 | 5390 | 5470 | 5540 | 5580 | 5580 |
| 60 | | | | 5940 | 6030 | 6110 | 6160 | 6160 | |
| 65 | | | | 6640 | 6730 | 6790 | 6800 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|------|------|------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB15KQ | Q | 15 | 4950 | 5350 | 6400 | 7600 | | | |
| | | 20 | 4750 | 5150 | 6200 | 7400 | 8750 | | |
| | | 30 | 4300 | 4650 | 5650 | 6750 | 8000 | 9450 | 10200 |
| | | 40 | 3850 | 4200 | 5100 | 6150 | 7350 | 8700 | 9450 |
| | | 50 | 3150 | 3450 | 4550 | 5500 | 6550 | 7800 | 8500 |
| | | 55 | | 3350 | 4200 | 5350 | 6400 | 7600 | 8250 |
| | | 60 | | | 3900 | 4850 | 6000 | 7100 | 7750 |
| | 65 | | | | 4500 | 5600 | 6650 | 7200 | |
| | P | 15 | 930 | 940 | 980 | 1050 | | | |
| | | 20 | 1040 | 1050 | 1080 | 1130 | 1200 | | |
| | | 30 | 1310 | 1310 | 1320 | 1350 | 1380 | 1410 | 1420 |
| | | 40 | 1630 | 1620 | 1640 | 1660 | 1690 | 1710 | 1710 |
| | | 50 | 2020 | 2020 | 2040 | 2060 | 2090 | 2100 | 2090 |
| | | 55 | | 2160 | 2190 | 2220 | 2240 | 2260 | 2270 |
| 60 | | | | 2420 | 2460 | 2480 | 2500 | 2500 | |
| 65 | | | | 2720 | 2740 | 2760 | 2770 | | |
| ZB19KQ | Q | 15 | 5550 | 6050 | 7250 | 8650 | | | |
| | | 20 | 5350 | 5800 | 7000 | 8400 | 9950 | | |
| | | 30 | 4900 | 5350 | 6500 | 7750 | 9250 | 10950 | 11850 |
| | | 40 | 4450 | 4850 | 5900 | 7100 | 8500 | 10050 | 10950 |
| | | 50 | 3650 | 4000 | 5300 | 6350 | 7650 | 9100 | 9900 |
| | | 55 | | 3700 | 4650 | 5950 | 7150 | 8550 | 9350 |
| | | 60 | | | 4300 | 5350 | 6700 | 8000 | 8750 |
| | 65 | | | | 4900 | 6150 | 7400 | 8100 | |
| | P | 15 | 1200 | 1200 | 1200 | 1210 | | | |
| | | 20 | 1340 | 1340 | 1340 | 1370 | 1390 | | |
| | | 30 | 1640 | 1640 | 1650 | 1670 | 1700 | 1720 | 1730 |
| | | 40 | 2010 | 2010 | 2010 | 2020 | 2040 | 2050 | 2060 |
| | | 50 | 2520 | 2510 | 2490 | 2480 | 2480 | 2470 | 2460 |
| | | 55 | | 2830 | 2800 | 2770 | 2750 | 2730 | 2710 |
| 60 | | | | 3150 | 3110 | 3070 | 3030 | 3010 | |
| 65 | | | | 3510 | 3450 | 3380 | 3350 | | |
| ZB21KQ | Q | 15 | 7150 | 7750 | 9300 | 11100 | | | |
| | | 20 | 6900 | 7500 | 9050 | 10750 | 12700 | | |
| | | 30 | 6400 | 6900 | 8400 | 10050 | 11900 | 13950 | 15100 |
| | | 40 | 5800 | 6300 | 7650 | 9200 | 10950 | 12900 | 13950 |
| | | 50 | 4750 | 5200 | 6850 | 8250 | 9850 | 11650 | 12650 |
| | | 55 | | 4900 | 6100 | 7800 | 9300 | 11000 | 11950 |
| | | 60 | | | 5700 | 7000 | 8700 | 10350 | 11250 |
| | 65 | | | | 6500 | 8100 | 9650 | 10500 | |
| | P | 15 | 1350 | 1360 | 1430 | 1510 | | | |
| | | 20 | 1500 | 1520 | 1570 | 1640 | 1740 | | |
| | | 30 | 1870 | 1880 | 1910 | 1960 | 2020 | 2100 | 2150 |
| | | 40 | 2300 | 2310 | 2340 | 2380 | 2420 | 2470 | 2500 |
| | | 50 | 2810 | 2830 | 2870 | 2910 | 2940 | 2970 | 2990 |
| | | 55 | | 3130 | 3180 | 3220 | 3250 | 3280 | 3290 |
| 60 | | | | 3510 | 3560 | 3600 | 3620 | 3630 | |
| 65 | | | | 3940 | 3980 | 4000 | 4010 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB26KQ | Q | 15 | 8400 | 9050 | 10950 | 13050 | | | |
| | | 20 | 8050 | 8700 | 10500 | 12550 | 14950 | | |
| | | 30 | 7400 | 8000 | 9700 | 11600 | 13800 | 16300 | 17700 |
| | | 40 | 6700 | 7300 | 8850 | 10600 | 12650 | 14950 | 16200 |
| | | 50 | 5500 | 6000 | 7950 | 9550 | 11400 | 13500 | 14650 |
| | | 55 | | 5600 | 7050 | 9000 | 10750 | 12700 | 13850 |
| | | 60 | | | 6500 | 8100 | 10050 | 11900 | 12950 |
| | 65 | | | | 7450 | 9300 | 11050 | 12050 | |
| | P | 15 | 1500 | 1490 | 1510 | 1580 | | | |
| | | 20 | 1690 | 1680 | 1700 | 1760 | 1830 | | |
| | | 30 | 2140 | 2120 | 2130 | 2190 | 2260 | 2280 | 2260 |
| | | 40 | 2700 | 2670 | 2680 | 2730 | 2780 | 2800 | 2770 |
| | | 50 | 3410 | 3380 | 3380 | 3410 | 3460 | 3460 | 3430 |
| | | 55 | | 3810 | 3790 | 3820 | 3860 | 3850 | 3820 |
| 60 | | | | 4260 | 4280 | 4310 | 4300 | 4260 | |
| 65 | | | | 4800 | 4820 | 4790 | 4750 | | |
| ZB29KQ | Q | 15 | 9850 | 10650 | 12800 | 15150 | | | |
| | | 20 | 9450 | 10250 | 12400 | 14750 | 17350 | | |
| | | 30 | 8650 | 9450 | 11450 | 13700 | 16250 | 19150 | 20750 |
| | | 40 | 7800 | 8500 | 10350 | 12450 | 14850 | 17600 | 19150 |
| | | 50 | 6350 | 7000 | 9200 | 11100 | 13300 | 15800 | 17250 |
| | | 55 | | 6550 | 8150 | 10400 | 12450 | 14850 | 16200 |
| | | 60 | | | 7550 | 9300 | 11600 | 13850 | 15150 |
| | 65 | | | | 8600 | 10700 | 12800 | 14000 | |
| | P | 15 | 1760 | 1760 | 1800 | 1880 | | | |
| | | 20 | 1980 | 1980 | 2010 | 2080 | 2160 | | |
| | | 30 | 2470 | 2460 | 2490 | 2540 | 2610 | 2660 | 2680 |
| | | 40 | 3060 | 3060 | 3090 | 3140 | 3190 | 3220 | 3220 |
| | | 50 | 3800 | 3810 | 3840 | 3890 | 3930 | 3950 | 3950 |
| | | 55 | | 4240 | 4280 | 4340 | 4380 | 4390 | 4380 |
| 60 | | | | 4780 | 4840 | 4880 | 4890 | 4880 | |
| 65 | | | | 5390 | 5440 | 5450 | 5440 | | |
| ZB38KQ | Q | 15 | 11950 | 12900 | 15500 | 18450 | | | |
| | | 20 | 11550 | 12500 | 15050 | 17950 | 21200 | | |
| | | 30 | 10650 | 11550 | 14000 | 16750 | 19850 | 23300 | 25150 |
| | | 40 | 9650 | 10500 | 12750 | 15350 | 18250 | 21500 | 23250 |
| | | 50 | 7900 | 8700 | 11450 | 13800 | 16450 | 19450 | 21100 |
| | | 55 | | 8150 | 10150 | 13000 | 15500 | 18400 | 19950 |
| | | 60 | | | 9450 | 11700 | 14550 | 17250 | 18750 |
| | 65 | | | | 10850 | 13550 | 16100 | 17500 | |
| | P | 15 | 2260 | 2290 | 2400 | 2540 | | | |
| | | 20 | 2530 | 2550 | 2630 | 2750 | 2920 | | |
| | | 30 | 3140 | 3150 | 3210 | 3290 | 3400 | 3530 | 3610 |
| | | 40 | 3860 | 3880 | 3940 | 4000 | 4070 | 4150 | 4190 |
| | | 50 | 4730 | 4760 | 4830 | 4890 | 4940 | 4990 | 5020 |
| | | 55 | | 5260 | 5340 | 5410 | 5460 | 5510 | 5530 |
| 60 | | | | 5900 | 5980 | 6040 | 6090 | 6100 | |
| 65 | | | | 6610 | 6680 | 6730 | 6740 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB45KQ | Q | 15 | 14450 | 15550 | 18650 | 22200 | | | |
| | | 20 | 13900 | 15000 | 18050 | 21500 | 25400 | | |
| | | 30 | 12800 | 13850 | 16700 | 20000 | 23750 | 27850 | 30100 |
| | | 40 | 11600 | 12550 | 15250 | 18350 | 21850 | 25700 | 27800 |
| | | 50 | 9450 | 10300 | 13600 | 16450 | 19650 | 23300 | 25250 |
| | | 55 | | 9550 | 11950 | 15400 | 18500 | 21950 | 23800 |
| | | 60 | | | 11050 | 13750 | 17250 | 20550 | 22300 |
| | 65 | | | | 12650 | 15900 | 19050 | 20750 | |
| | P | 15 | 2560 | 2580 | 2670 | 2840 | | | |
| | | 20 | 2880 | 2890 | 2970 | 3100 | 3290 | | |
| | | 30 | 3610 | 3620 | 3660 | 3750 | 3870 | 4020 | 4110 |
| | | 40 | 4450 | 4470 | 4520 | 4590 | 4670 | 4750 | 4800 |
| | | 50 | 5450 | 5480 | 5570 | 5640 | 5700 | 5750 | 5770 |
| | | 55 | | 6060 | 6170 | 6260 | 6320 | 6360 | 6370 |
| 60 | | | | 6830 | 6940 | 7010 | 7050 | 7060 | |
| 65 | | | | 7690 | 7780 | 7820 | 7830 | | |
| ZB48KQ | Q | 15 | 15900 | 17100 | 20500 | 24400 | | | |
| | | 20 | 15300 | 16500 | 19850 | 23650 | 27950 | | |
| | | 30 | 14100 | 15250 | 18400 | 22000 | 26100 | 30650 | 33100 |
| | | 40 | 12750 | 13800 | 16750 | 20150 | 24000 | 28300 | 30600 |
| | | 50 | 10350 | 11350 | 14950 | 18050 | 21600 | 25600 | 27750 |
| | | 55 | | 10500 | 13150 | 16950 | 20300 | 24150 | 26200 |
| | | 60 | | | 12150 | 15150 | 18950 | 22600 | 24550 |
| | 65 | | | | 13900 | 17500 | 20950 | 22800 | |
| | P | 15 | 2810 | 2830 | 2940 | 3130 | | | |
| | | 20 | 3170 | 3180 | 3270 | 3410 | 3620 | | |
| | | 30 | 3970 | 3980 | 4030 | 4130 | 4260 | 4420 | 4520 |
| | | 40 | 4900 | 4920 | 4970 | 5050 | 5130 | 5230 | 5280 |
| | | 50 | 5990 | 6030 | 6120 | 6210 | 6280 | 6330 | 6350 |
| | | 55 | | 6660 | 6790 | 6880 | 6960 | 7000 | 7010 |
| 60 | | | | 7510 | 7630 | 7720 | 7760 | 7760 | |
| 65 | | | | 8450 | 8560 | 8610 | 8610 | | |
| ZB58KQ | Q | 15 | 18600 | 20050 | 24150 | 28800 | | | |
| | | 20 | 17850 | 19300 | 23300 | 27900 | 33150 | | |
| | | 30 | 16300 | 17700 | 21550 | 25950 | 30950 | 36600 | |
| | | 40 | 14650 | 15950 | 19600 | 23750 | 28450 | 33750 | 36700 |
| | | 50 | 11650 | 12900 | 17350 | 21250 | 25600 | 30550 | 33250 |
| | | 55 | | 11800 | 15200 | 19800 | 24000 | 28750 | 31350 |
| | | 60 | | | 13850 | 17650 | 22300 | 26850 | 29350 |
| | 65 | | | | 16000 | 20500 | 24800 | 27150 | |
| | P | 15 | 3500 | 3550 | 3680 | 3860 | | | |
| | | 20 | 3940 | 3970 | 4070 | 4220 | 4420 | | |
| | | 30 | 4900 | 4920 | 4970 | 5050 | 5170 | 5350 | 5460 |
| | | 40 | 6040 | 6040 | 6070 | 6100 | 6170 | 6270 | 6340 |
| | | 50 | 7420 | 7430 | 7440 | 7450 | 7470 | 7530 | 7570 |
| | | 55 | | 8230 | 8250 | 8250 | 8270 | 8300 | 8330 |
| 60 | | | | 9150 | 9160 | 9160 | 9180 | 9200 | |
| 65 | | | | 10170 | 10170 | 10180 | 10200 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|--------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB66KQ | Q | 15 | 20450 | 22150 | 26850 | 32300 | | | |
| | | 20 | 19800 | 21450 | 26000 | 31300 | 37350 | | |
| | | 30 | 18400 | 19950 | 24200 | 29150 | 34750 | 41200 | 44700 |
| | | 40 | 16850 | 18300 | 22250 | 26800 | 32000 | 37850 | 41100 |
| | | 50 | 13800 | 15150 | 20050 | 24200 | 28950 | 34300 | 37250 |
| | | 55 | | 14150 | 17800 | 22850 | 27300 | 32400 | 35200 |
| | | 60 | | | 16550 | 20600 | 25650 | 30450 | 33100 |
| | 65 | | | | 19100 | 23850 | 28400 | 30900 | |
| | P | 15 | 3890 | 3940 | 4080 | 4250 | | | |
| | | 20 | 4360 | 4400 | 4530 | 4680 | 4870 | | |
| | | 30 | 5380 | 5420 | 5530 | 5660 | 5800 | 5980 | 6080 |
| | | 40 | 6590 | 6630 | 6730 | 6840 | 6950 | 7080 | 7160 |
| | | 50 | 8070 | 8120 | 8220 | 8310 | 8400 | 8500 | 8550 |
| | | 55 | | 8990 | 9090 | 9180 | 9260 | 9340 | 9390 |
| 60 | | | | 10070 | 10150 | 10220 | 10290 | 10330 | |
| 65 | | | | 11240 | 11300 | 11370 | 11400 | | |
| ZB76KQ | Q | 15 | 24500 | 26550 | 32200 | 38700 | | | |
| | | 20 | 23750 | 25700 | 31150 | 37350 | 44400 | | |
| | | 30 | 22150 | 23950 | 28950 | 34650 | 41100 | 48350 | 52250 |
| | | 40 | 20250 | 21900 | 26550 | 31800 | 37700 | 44300 | 47900 |
| | | 50 | 16500 | 18100 | 23850 | 28700 | 34100 | 40150 | 43400 |
| | | 55 | | 16800 | 21100 | 27000 | 32200 | 37950 | 41050 |
| | | 60 | | | 19500 | 24300 | 30200 | 35700 | 38650 |
| | 65 | | | | 22450 | 28100 | 33350 | 36150 | |
| | P | 15 | 4810 | 4870 | 5040 | 5250 | | | |
| | | 20 | 5250 | 5310 | 5460 | 5640 | 5870 | | |
| | | 30 | 6360 | 6410 | 6530 | 6670 | 6850 | 7090 | 7240 |
| | | 40 | 7820 | 7860 | 7950 | 8060 | 8200 | 8390 | 8500 |
| | | 50 | 9680 | 9710 | 9790 | 9860 | 9960 | 10100 | 10190 |
| | | 55 | | 10800 | 10870 | 10930 | 11010 | 11130 | 11210 |
| 60 | | | | 12070 | 12120 | 12190 | 12280 | 12350 | |
| 65 | | | | 13440 | 13490 | 13560 | 13620 | | |
| ZB88KQ | Q | 15 | 33400 | 36250 | 43650 | 51200 | | | |
| | | 20 | 30200 | 32900 | 40050 | 47400 | 54650 | | |
| | | 30 | 25400 | 27800 | 34350 | 41350 | 48450 | 55300 | 58500 |
| | | 40 | 22150 | 24200 | 30050 | 36550 | 43400 | 50250 | 53500 |
| | | 50 | 18000 | 19700 | 26350 | 32300 | 38800 | 45500 | 48800 |
| | | 55 | | 18350 | 23100 | 30100 | 36400 | 43000 | 46300 |
| | | 60 | | | 21150 | 26750 | 33850 | 40300 | 43550 |
| | 65 | | | | 24200 | 30950 | 37300 | 40550 | |
| | P | 15 | 5380 | 5450 | 5680 | 5970 | | | |
| | | 20 | 5930 | 6000 | 6190 | 6450 | 6790 | | |
| | | 30 | 7210 | 7270 | 7420 | 7610 | 7860 | 8200 | 8410 |
| | | 40 | 8790 | 8850 | 8980 | 9130 | 9310 | 9560 | 9710 |
| | | 50 | 10780 | 10840 | 10970 | 11090 | 11220 | 11400 | 11510 |
| | | 55 | | 12020 | 12160 | 12270 | 12390 | 12530 | 12620 |
| 60 | | | | 13480 | 13590 | 13700 | 13820 | 13900 | |
| 65 | | | | 15070 | 15170 | 15270 | 15340 | | |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -12 | -10 | -5 | 0 | 5 | 10 | 12.5 | |
| ZB95KQ | Q | 15 | 30650 | 33150 | 40000 | 47850 | | | |
| | | 20 | 29550 | 31950 | 38650 | 46250 | 54850 | | |
| | | 30 | 26950 | 29300 | 35650 | 42800 | 50800 | 59750 | 64600 |
| | | 40 | 23850 | 26050 | 32100 | 38850 | 46400 | 54700 | 59200 |
| | | 50 | | | 28050 | 34400 | 41450 | 49250 | 53400 |
| | | 55 | | | | 32000 | 38800 | 46300 | 50300 |
| | | 60 | | | | | 36000 | 43250 | 47100 |
| | 65 | | | | | 33000 | 40000 | 43750 | |
| | P | 15 | 5940 | 6050 | 6380 | 6840 | | | |
| | | 20 | 6510 | 6590 | 6850 | 7220 | 7710 | | |
| | | 30 | 8020 | 8070 | 8230 | 8450 | 8760 | 9170 | 9430 |
| | | 40 | 9980 | 10030 | 10160 | 10300 | 10490 | 10740 | 10900 |
| | | 50 | | | 12590 | 12720 | 12860 | 13020 | 13110 |
| | | 55 | | | | 14130 | 14270 | 14400 | 14480 |
| 60 | | | | | | 15820 | 15950 | 16010 | |
| 65 | | | | | 17500 | 17640 | 17710 | | |
| ZB114KQ | Q | 15 | 36600 | 39800 | 49050 | 60300 | | | |
| | | 20 | 35050 | 38050 | 46550 | 56850 | 69200 | | |
| | | 30 | 32150 | 34850 | 42350 | 51100 | 61500 | 73800 | 80700 |
| | | 40 | 28800 | 31450 | 38400 | 46200 | 55200 | 65600 | 71450 |
| | | 50 | | | 33850 | 41300 | 49400 | 58500 | 63500 |
| | | 55 | | | | 38500 | 46400 | 55050 | 59750 |
| | | 60 | | | | | 43200 | 51550 | 56000 |
| | 65 | | | | | 39650 | 47850 | 52150 | |
| | P | 15 | 7290 | 7390 | 7740 | 8230 | | | |
| | | 20 | 7990 | 8080 | 8380 | 8790 | 9360 | | |
| | | 30 | 9700 | 9760 | 9970 | 10270 | 10690 | 11250 | 11580 |
| | | 40 | 11880 | 11930 | 12080 | 12290 | 12580 | 12990 | 13240 |
| | | 50 | | | 14780 | 14930 | 15130 | 15410 | 15580 |
| | | 55 | | | | 16500 | 16670 | 16890 | 17040 |
| 60 | | | | | | 18400 | 18580 | 18700 | |
| 65 | | | | | 20350 | 20490 | 20580 | | |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB15KQE | Q | 10 | 4400 | 5400 | 6550 | | | | |
| | | 20 | 4000 | 4900 | 5900 | 7050 | 8400 | | |
| | | 30 | 3550 | 4350 | 5250 | 6300 | 7450 | 8800 | 10250 |
| | | 40 | 3100 | 3750 | 4550 | 5450 | 6450 | 7600 | 8900 |
| | | 50 | 2550 | 3150 | 3800 | 4550 | 5400 | 6400 | 7500 |
| | | 60 | | 2450 | 3800 | 3600 | 4300 | 5100 | 6050 |
| | P | 10 | 940 | 950 | 950 | | | | |
| | | 20 | 1170 | 1180 | 1190 | 1190 | 1190 | | |
| | | 30 | 1470 | 1480 | 1490 | 1490 | 1490 | 1480 | 1470 |
| | | 40 | 1840 | 1850 | 1860 | 1860 | 1860 | 1850 | 1840 |
| | | 50 | 2310 | 2320 | 2320 | 2320 | 2320 | 2320 | 2300 |
| | | 60 | | 2890 | 2320 | 2890 | 2890 | 2880 | 2870 |
| ZB19KQE | Q | 10 | 5500 | 6750 | 8150 | | | | |
| | | 20 | 5000 | 6100 | 7350 | 8850 | 10500 | | |
| | | 30 | 4450 | 5400 | 6550 | 7850 | 9300 | 10950 | 12800 |
| | | 40 | 3850 | 4700 | 5650 | 6800 | 8050 | 9500 | 11150 |
| | | 50 | 3200 | 3900 | 4750 | 5700 | 6750 | 8000 | 9400 |
| | | 60 | | 3050 | 3700 | 4500 | 5350 | 6400 | 7550 |
| | P | 10 | 1170 | 1180 | 1190 | | | | |
| | | 20 | 1470 | 1480 | 1490 | 1490 | 1480 | | |
| | | 30 | 1840 | 1850 | 1860 | 1860 | 1860 | 1850 | 1830 |
| | | 40 | 2300 | 2310 | 2320 | 2330 | 2330 | 2320 | 2300 |
| | | 50 | 2890 | 2890 | 2900 | 2900 | 2900 | 2890 | 2880 |
| | | 60 | | 3610 | 3610 | 3610 | 3610 | 3600 | 3580 |
| ZB21KQE | Q | 10 | 6600 | 8050 | 9750 | | | | |
| | | 20 | 5950 | 7300 | 8800 | 10550 | 12550 | | |
| | | 30 | 5300 | 6450 | 7800 | 9350 | 11100 | 13100 | 15350 |
| | | 40 | 4600 | 5600 | 6800 | 8100 | 9650 | 11150 | 13300 |
| | | 50 | 3800 | 4650 | 5650 | 6800 | 8100 | 9550 | 11200 |
| | | 60 | | 3650 | 4450 | 5350 | 6400 | 7650 | 9000 |
| | P | 10 | 1410 | 1420 | 1430 | | | | |
| | | 20 | 1760 | 1770 | 1780 | 1790 | 1780 | | |
| | | 30 | 2200 | 2220 | 2230 | 2230 | 2230 | 2220 | 2200 |
| | | 40 | 2760 | 2780 | 2790 | 2790 | 2790 | 2850 | 2760 |
| | | 50 | 3460 | 3470 | 3480 | 3480 | 3480 | 3470 | 3450 |
| | | 60 | | 4330 | 4330 | 4330 | 4330 | 4320 | 4300 |
| ZB26KQE | Q | 10 | 7700 | 9400 | 11400 | | | | |
| | | 20 | 6950 | 8500 | 10300 | 12350 | 14650 | | |
| | | 30 | 6200 | 7550 | 9150 | 10950 | 13000 | 15300 | 17900 |
| | | 40 | 5350 | 6550 | 7900 | 9500 | 11250 | 13300 | 15550 |
| | | 50 | 4450 | 5450 | 6600 | 7950 | 9450 | 11150 | 13100 |
| | | 60 | | 4250 | 5200 | 6250 | 7500 | 8900 | 10500 |
| | P | 10 | 1640 | 1660 | 1660 | | | | |
| | | 20 | 2050 | 2070 | 2080 | 2080 | 2080 | | |
| | | 30 | 2570 | 2590 | 2600 | 2610 | 2600 | 2590 | 2560 |
| | | 40 | 3230 | 3240 | 3250 | 3260 | 3260 | 3240 | 3220 |
| | | 50 | 4040 | 4050 | 4060 | 4070 | 4060 | 4050 | 4030 |
| | | 60 | | 5050 | 5060 | 5060 | 5050 | 5040 | 5020 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 1-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB29KQE | Q | 10 | 8600 | 10550 | 12800 | | | | |
| | | 20 | 7800 | 9550 | 11600 | 13950 | 16650 | | |
| | | 30 | 6900 | 8500 | 10350 | 12450 | 14800 | 17500 | 20500 |
| | | 40 | 5900 | 7350 | 8950 | 10750 | 12850 | 15150 | 17800 |
| | | 50 | 4800 | 6050 | 7400 | 8950 | 10700 | 12700 | 14900 |
| | | 60 | | 4600 | 5750 | 7000 | 8450 | 10050 | 11850 |
| | P | 10 | 2070 | 2110 | 2160 | | | | |
| | | 20 | 2460 | 2500 | 2530 | 2580 | 2640 | | |
| | | 30 | 2970 | 3000 | 3030 | 3060 | 3110 | 3160 | 3240 |
| | | 40 | 3610 | 3630 | 3660 | 3680 | 3720 | 3760 | 3820 |
| | | 50 | 4390 | 4420 | 4440 | 4470 | 4490 | 4520 | 4560 |
| | | 60 | | 5370 | 5400 | 5430 | 5450 | 5470 | 5500 |
| ZB38KQE | Q | 10 | 10900 | 13200 | 15800 | | | | |
| | | 20 | 9900 | 12100 | 14600 | 17400 | 20450 | | |
| | | 30 | 8700 | 10750 | 13050 | 15650 | 18500 | 21650 | 25050 |
| | | 40 | 7350 | 9150 | 11250 | 13550 | 16150 | 19000 | 22150 |
| | | 50 | 6000 | 7500 | 9250 | 11200 | 13450 | 16000 | 18750 |
| | | 60 | | 5800 | 7150 | 8750 | 10550 | 12600 | 14950 |
| | P | 10 | 2550 | 2630 | 2750 | | | | |
| | | 20 | 3040 | 3090 | 3160 | 3270 | 3430 | | |
| | | 30 | 3680 | 3720 | 3770 | 3840 | 3950 | 4100 | 4300 |
| | | 40 | 4480 | 4520 | 4560 | 4620 | 4690 | 4790 | 4940 |
| | | 50 | 5440 | 5510 | 5560 | 5600 | 5660 | 5730 | 5840 |
| | | 60 | | 6670 | 6740 | 6800 | 6860 | 6920 | 7010 |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB15KQE | Q | 10 | 4400 | 5400 | 6550 | | | | |
| | | 20 | 3950 | 4850 | 5900 | 7100 | 8550 | | |
| | | 30 | 3500 | 4300 | 5250 | 6300 | 7550 | 8950 | 10550 |
| | | 40 | 2950 | 3650 | 4500 | 5400 | 6500 | 7700 | 9100 |
| | | 50 | 2350 | 3000 | 3700 | 4450 | 5350 | 6400 | 7550 |
| | | 60 | | 2200 | 2800 | 3450 | 4150 | 5000 | 5900 |
| | P | 10 | 950 | 930 | 910 | | | | |
| | | 20 | 1210 | 1200 | 1190 | 1160 | 1140 | | |
| | | 30 | 1530 | 1530 | 1510 | 1500 | 1470 | 1440 | 1410 |
| | | 40 | 1950 | 1940 | 1920 | 1910 | 1880 | 1850 | 1820 |
| | | 50 | 2480 | 2470 | 2450 | 2420 | 2390 | 2360 | 2320 |
| | | 60 | | 3140 | 3110 | 3070 | 3040 | 3000 | 2950 |
| ZB19KQE | Q | 10 | 5450 | 6700 | 8100 | | | | |
| | | 20 | 4950 | 6050 | 7300 | 8750 | 10400 | | |
| | | 30 | 4400 | 5350 | 6500 | 7750 | 9250 | 10850 | 12700 |
| | | 40 | 3800 | 4650 | 5650 | 6750 | 8000 | 9450 | 11050 |
| | | 50 | 3150 | 3900 | 4700 | 5650 | 6700 | 7950 | 9300 |
| | | 60 | | 3000 | 3700 | 4450 | 5350 | 6350 | 7450 |
| | P | 10 | 1130 | 1140 | 1140 | | | | |
| | | 20 | 1410 | 1420 | 1430 | 1430 | 1430 | | |
| | | 30 | 1760 | 1780 | 1780 | 1790 | 1790 | 1780 | 1760 |
| | | 40 | 2210 | 2220 | 2230 | 2240 | 2230 | 2230 | 2210 |
| | | 50 | 2770 | 2780 | 2790 | 2790 | 2790 | 2780 | 2760 |
| | | 60 | | 3470 | 3470 | 3470 | 3470 | 3460 | 3440 |
| ZB21KQE | Q | 10 | 6550 | 8050 | 9750 | | | | |
| | | 20 | 5950 | 7250 | 8750 | 10500 | 12500 | | |
| | | 30 | 5300 | 6450 | 7800 | 9350 | 11100 | 13050 | 15250 |
| | | 40 | 4600 | 5600 | 6750 | 8100 | 9600 | 11350 | 13250 |
| | | 50 | 3800 | 4650 | 5650 | 6750 | 8050 | 9500 | 11150 |
| | | 60 | | 3600 | 4400 | 5350 | 6400 | 7600 | 8950 |
| | P | 10 | 1350 | 1360 | 1370 | | | | |
| | | 20 | 1690 | 1700 | 1710 | 1720 | 1710 | | |
| | | 30 | 2120 | 2130 | 2140 | 2150 | 2140 | 2130 | 2110 |
| | | 40 | 2660 | 2670 | 2680 | 2680 | 2680 | 2670 | 2650 |
| | | 50 | 3330 | 3340 | 3340 | 3350 | 3340 | 3330 | 3320 |
| | | 60 | | 4160 | 4160 | 4160 | 4160 | 4150 | 4130 |
| ZB26KQE | Q | 10 | 7650 | 9350 | 11350 | | | | |
| | | 20 | 6900 | 8450 | 10200 | 12250 | 14550 | | |
| | | 30 | 6150 | 7500 | 9050 | 10850 | 12900 | 15200 | 17800 |
| | | 40 | 5350 | 6500 | 7850 | 9400 | 11200 | 13200 | 15450 |
| | | 50 | 4400 | 5400 | 6550 | 7900 | 9400 | 11100 | 13000 |
| | | 60 | | 4200 | 5150 | 6200 | 7450 | 8850 | 10450 |
| | P | 10 | 1580 | 1590 | 1600 | | | | |
| | | 20 | 1980 | 1990 | 2000 | 2010 | 2000 | | |
| | | 30 | 2470 | 2490 | 2500 | 2510 | 2500 | 2490 | 2460 |
| | | 40 | 3100 | 3120 | 3130 | 3130 | 3130 | 3120 | 3100 |
| | | 50 | 3890 | 3900 | 3910 | 3910 | 3910 | 3900 | 3870 |
| | | 60 | | 4860 | 4870 | 4870 | 4860 | 4850 | 4820 |
| ZB29KQE | Q | 10 | 8700 | 10600 | 12850 | | | | |
| | | 20 | 7850 | 9600 | 11600 | 13900 | 16550 | | |
| | | 30 | 7000 | 8500 | 10300 | 12350 | 14650 | 17250 | 20200 |
| | | 40 | 6050 | 7400 | 8950 | 10700 | 12700 | 15000 | 17550 |
| | | 50 | 5000 | 6150 | 7450 | 8950 | 10650 | 12600 | 14750 |
| | | 60 | | 4750 | 5850 | 7050 | 8450 | 10050 | 11850 |
| | P | 10 | 1760 | 1770 | 1780 | | | | |
| | | 20 | 2200 | 2220 | 2230 | 2230 | 2230 | | |
| | | 30 | 2760 | 2770 | 2790 | 2790 | 2790 | 2770 | 2750 |
| | | 40 | 3460 | 3470 | 3480 | 3490 | 3490 | 3480 | 3450 |
| | | 50 | 4330 | 4340 | 4350 | 4360 | 4350 | 4340 | 4320 |
| | | 60 | | 5420 | 5420 | 5420 | 5410 | 5400 | 5370 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB38KQE | Q | 10 | 10950 | 13400 | 16200 | | | | |
| | | 20 | 9900 | 12100 | 14600 | 17550 | 20850 | | |
| | | 30 | 8800 | 10750 | 13000 | 15550 | 18450 | 21750 | 25450 |
| | | 40 | 7600 | 9300 | 11250 | 13500 | 16000 | 18900 | 22100 |
| | | 50 | 6300 | 7750 | 9400 | 11250 | 13400 | 15850 | 18600 |
| | | 60 | | 6000 | 7350 | 8900 | 10650 | 12650 | 14950 |
| | P | 10 | 2220 | 2240 | 2250 | | | | |
| | | 20 | 2780 | 2800 | 2820 | 2820 | 2810 | | |
| | | 30 | 3480 | 3500 | 3520 | 3530 | 3520 | 3500 | 3470 |
| | | 40 | 4360 | 4380 | 4400 | 4410 | 4400 | 4390 | 4360 |
| | | 50 | 5470 | 5480 | 5500 | 5500 | 5500 | 5480 | 5450 |
| | | 60 | | 6840 | 6840 | 6840 | 6840 | 6840 | 6790 |
| ZB45KQE | Q | 10 | 13000 | 15900 | 19250 | | | | |
| | | 20 | 11750 | 14350 | 17350 | 20800 | 24750 | | |
| | | 30 | 10450 | 12750 | 15400 | 18450 | 21900 | 25850 | 30250 |
| | | 40 | 9050 | 11050 | 13350 | 16000 | 19000 | 22400 | 26250 |
| | | 50 | 7500 | 9200 | 11150 | 13400 | 15950 | 18850 | 22100 |
| | | 60 | | 7150 | 8750 | 10550 | 12650 | 15050 | 17750 |
| | P | 10 | 2590 | 2620 | 2630 | | | | |
| | | 20 | 3240 | 3270 | 3290 | 3290 | 3290 | | |
| | | 30 | 4060 | 4090 | 4110 | 4120 | 4110 | 4090 | 4050 |
| | | 40 | 5090 | 5120 | 5140 | 5150 | 5140 | 5120 | 5090 |
| | | 50 | 6380 | 6400 | 6420 | 6420 | 6420 | 6400 | 6360 |
| | | 60 | | 7980 | 7990 | 7990 | 7990 | 7980 | 7920 |
| ZB48KQE | Q | 10 | 14300 | 17450 | 21150 | | | | |
| | | 20 | 12900 | 15750 | 19100 | 22900 | 27200 | | |
| | | 30 | 11500 | 14000 | 16950 | 20300 | 24100 | 28400 | 33250 |
| | | 40 | 9950 | 12150 | 14700 | 17600 | 20900 | 24650 | 28850 |
| | | 50 | 8250 | 10100 | 12250 | 14700 | 17500 | 20700 | 24300 |
| | | 60 | | 7850 | 9600 | 11600 | 13900 | 16550 | 19500 |
| | P | 10 | 2850 | 2880 | 2890 | | | | |
| | | 20 | 3570 | 3600 | 3620 | 3620 | 3610 | | |
| | | 30 | 4470 | 4500 | 4520 | 4530 | 4520 | 4500 | 4460 |
| | | 40 | 5600 | 5630 | 5650 | 5660 | 5660 | 5640 | 5600 |
| | | 50 | 7020 | 7040 | 7060 | 7060 | 7060 | 7040 | 7000 |
| | | 60 | | 8780 | 8790 | 8790 | 8790 | 8780 | 8710 |
| ZB58KQE | Q | 10 | 16500 | 20100 | 24400 | | | | |
| | | 20 | 15100 | 18350 | 22200 | 26700 | 31950 | | |
| | | 30 | 13550 | 16550 | 19950 | 23900 | 28500 | 33850 | 40100 |
| | | 40 | 11600 | 14400 | 17450 | 20950 | 24900 | 29500 | 34850 |
| | | 50 | 9050 | 11750 | 14550 | 17600 | 21000 | 24950 | 29450 |
| | | 60 | | 8350 | 10950 | 13650 | 16600 | 19900 | 23700 |
| | P | 10 | 3680 | 3800 | 3910 | | | | |
| | | 20 | 4460 | 4580 | 4690 | 4790 | 4840 | | |
| | | 30 | 5480 | 5570 | 5680 | 5770 | 5840 | 5850 | 5810 |
| | | 40 | 6780 | 6850 | 6930 | 7020 | 7080 | 7110 | 7080 |
| | | 50 | 8460 | 8480 | 8530 | 8590 | 8640 | 8670 | 8650 |
| | | 60 | | 10530 | 10540 | 10570 | 10600 | 10610 | 10580 |
| ZB66KQE | Q | 10 | 18950 | 23200 | 28200 | | | | |
| | | 20 | 17250 | 21050 | 25550 | 30750 | 36750 | | |
| | | 30 | 15400 | 18800 | 22750 | 27300 | 32500 | 38500 | 45300 |
| | | 40 | 13400 | 16350 | 19800 | 23700 | 28150 | 33250 | 39050 |
| | | 50 | 11150 | 13700 | 16600 | 19850 | 23550 | 27800 | 32600 |
| | | 60 | | 10700 | 13100 | 15700 | 18650 | 22000 | 25850 |
| | P | 10 | 4110 | 4250 | 4420 | | | | |
| | | 20 | 5020 | 5150 | 5310 | 5480 | 5650 | | |
| | | 30 | 6130 | 6260 | 6400 | 6550 | 6700 | 6840 | 6950 |
| | | 40 | 7520 | 7640 | 7770 | 7900 | 8020 | 8120 | 8200 |
| | | 50 | 9240 | 9350 | 9460 | 9570 | 9660 | 9740 | 9780 |
| | | 60 | | 11440 | 11540 | 11620 | 11690 | 11740 | 11740 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|----------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -20 | -15 | -10 | -5 | 0 | 5 | 10 | |
| ZB76KQE | Q | 10 | 22250 | 27100 | 32800 | | | | |
| | | 20 | 20200 | 24650 | 29850 | 35850 | 42800 | | |
| | | 30 | 18050 | 22050 | 26650 | 32000 | 38150 | 45150 | 53100 |
| | | 40 | 15850 | 19300 | 23300 | 27900 | 33200 | 39250 | 46200 |
| | | 50 | 13600 | 16450 | 19750 | 23550 | 27950 | 33000 | 38850 |
| | | 60 | | 13500 | 16000 | 19000 | 22450 | 26450 | 31150 |
| | P | 10 | 4800 | 4960 | 5150 | | | | |
| | | 20 | 5860 | 6000 | 6140 | 6290 | 6450 | | |
| | | 30 | 7170 | 7320 | 7460 | 7580 | 7690 | 7800 | 7920 |
| | | 40 | 8710 | 8910 | 9080 | 9210 | 9320 | 9400 | 9460 |
| | | 50 | 10450 | 10750 | 10990 | 11180 | 11310 | 11400 | 11450 |
| | | 60 | | 12820 | 13170 | 13450 | 13650 | 13790 | 13870 |
| ZB95KQE | Q | 10 | 27350 | 33350 | 40450 | | | | |
| | | 20 | 25000 | 30450 | 36850 | 44250 | 52800 | | |
| | | 30 | 22300 | 27300 | 33000 | 39550 | 47050 | 55700 | 65550 |
| | | 40 | 19150 | 23700 | 28750 | 34450 | 40950 | 48350 | 56850 |
| | | 50 | | 19500 | 23950 | 28850 | 34350 | 40550 | 47650 |
| | | 60 | | | 18400 | 22500 | 27050 | 32100 | 37850 |
| | P | 10 | 6180 | 6440 | 6750 | | | | |
| | | 20 | 7500 | 7720 | 7980 | 8260 | 8580 | | |
| | | 30 | 9240 | 9400 | 9600 | 9830 | 10080 | 10350 | 10620 |
| | | 40 | 11500 | 11610 | 11750 | 11910 | 12100 | 12290 | 12480 |
| | | 50 | | 14430 | 14510 | 14610 | 14720 | 14840 | 14950 |
| | | 60 | | | 18010 | 18040 | 18080 | 18110 | 18150 |
| ZB114KQE | Q | 10 | 32800 | 40150 | 48750 | | | | |
| | | 20 | 29800 | 36450 | 44200 | 53100 | 63300 | | |
| | | 30 | 26500 | 32550 | 39450 | 47350 | 56350 | 66550 | 78050 |
| | | 40 | 22750 | 28150 | 34250 | 41200 | 49000 | 57900 | 67900 |
| | | 50 | | 23200 | 28500 | 34450 | 41150 | 48700 | 57200 |
| | | 60 | | | 21950 | 27000 | 32550 | 38800 | 45800 |
| | P | 10 | 7490 | 7740 | 8000 | | | | |
| | | 20 | 9070 | 9330 | 9600 | 9860 | 10100 | | |
| | | 30 | 11050 | 11300 | 11560 | 11810 | 12040 | 12250 | 12410 |
| | | 40 | 13570 | 13790 | 14010 | 14240 | 14440 | 14620 | 14760 |
| | | 50 | | 16940 | 17120 | 17290 | 17450 | 17580 | 17670 |
| | | 60 | | | 21010 | 21110 | 21210 | 21270 | 21300 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

60 Hz

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|------|------|------|------|-------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB15KQE | Q | 30 | 2300 | 2900 | 3600 | 4450 | 5400 | 6500 | |
| | | 35 | 2200 | 2800 | 3500 | 4200 | 5200 | 6250 | |
| | | 45 | 1950 | 2400 | 3150 | 3850 | 4700 | 5650 | 6750 |
| | | 55 | | 2050 | 2650 | 3250 | 4100 | 4950 | 5900 |
| | | 65 | | | 2200 | 2800 | 3500 | 4200 | 5050 |
| | | 75 | | | | 2300 | 2900 | 3600 | 4200 |
| ZB15KQE | P | 30 | 960 | 960 | 960 | 960 | 960 | 960 | |
| | | 35 | 960 | 960 | 960 | 1080 | 1080 | 1080 | |
| | | 45 | 1200 | 1200 | 1200 | 1320 | 1320 | 1320 | 1320 |
| | | 55 | | 1560 | 1560 | 1560 | 1560 | 1560 | 1560 |
| | | 65 | | | 1920 | 1920 | 1920 | 1920 | 1920 |
| | | 75 | | | | 2400 | 2400 | 2400 | 2400 |
| ZB19KQE | Q | 30 | 2650 | 3400 | 4200 | 5200 | 6250 | 7600 | |
| | | 35 | 2400 | 3250 | 4000 | 4950 | 6000 | 7200 | |
| | | 45 | 2200 | 2800 | 3600 | 4450 | 5400 | 6500 | 7700 |
| | | 55 | | 2400 | 3000 | 3750 | 4700 | 5650 | 6850 |
| | | 65 | | | 2550 | 3250 | 4000 | 4950 | 5900 |
| | | 75 | | | | 2650 | 3250 | 4100 | 4800 |
| ZB19KQE | P | 30 | 1080 | 1080 | 1080 | 1080 | 1080 | 1080 | |
| | | 35 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | |
| | | 45 | 1440 | 1440 | 1440 | 1440 | 1440 | 1440 | 1440 |
| | | 55 | | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| | | 65 | | | 2160 | 2160 | 2280 | 2280 | 2280 |
| | | 75 | | | | 2760 | 2760 | 2760 | 2760 |
| ZB21KQE | Q | 30 | 3400 | 4200 | 5300 | 6500 | 7800 | 9500 | |
| | | 35 | 3250 | 4000 | 5050 | 6150 | 7450 | 9000 | |
| | | 45 | 2800 | 3500 | 4450 | 5550 | 6750 | 8200 | 9750 |
| | | 55 | | 3000 | 3850 | 4800 | 5900 | 7200 | 8650 |
| | | 65 | | | 3250 | 4100 | 5050 | 6150 | 7450 |
| | | 75 | | | | 3250 | 4200 | 5200 | 6150 |
| ZB21KQE | P | 30 | 1320 | 1320 | 1320 | 1320 | 1320 | 1320 | |
| | | 35 | 1440 | 1440 | 1440 | 1440 | 1440 | 1440 | |
| | | 45 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| | | 55 | | 2160 | 2160 | 2160 | 2280 | 2280 | 2280 |
| | | 65 | | | 2640 | 2760 | 2760 | 2760 | 2760 |
| | | 75 | | | | 3360 | 3360 | 3360 | 3480 |
| ZB26KQE | Q | 30 | 3850 | 4950 | 6150 | 7450 | 9150 | 10950 | |
| | | 35 | 3600 | 4700 | 5800 | 7100 | 8650 | 10450 | |
| | | 45 | 3150 | 4000 | 5200 | 6400 | 7800 | 9400 | 11300 |
| | | 55 | | 3500 | 4450 | 5550 | 6850 | 8300 | 10000 |
| | | 65 | | | 3750 | 4700 | 5900 | 7100 | 8550 |
| | | 75 | | | | 3850 | 4800 | 6000 | 7100 |
| ZB26KQE | P | 30 | 1440 | 1440 | 1440 | 1440 | 1440 | 1560 | |
| | | 35 | 1560 | 1560 | 1680 | 1680 | 1680 | 1680 | |
| | | 45 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 |
| | | 55 | | 2520 | 2520 | 2520 | 2520 | 2520 | 2520 |
| | | 65 | | | 3120 | 3120 | 3120 | 3120 | 3120 |
| | | 75 | | | | 3840 | 3840 | 3840 | 3960 |
| ZB29KQE | Q | 30 | 4600 | 5700 | 7050 | 8650 | 10450 | 12600 | |
| | | 35 | 4150 | 5400 | 6700 | 8200 | 10000 | 12050 | |
| | | 45 | 3650 | 4650 | 5950 | 7350 | 8950 | 10800 | 12100 |
| | | 55 | | 3950 | 5050 | 6300 | 7850 | 9500 | 10700 |
| | | 65 | | | 4750 | 5350 | 6650 | 8150 | 9150 |
| | | 75 | | | | 4300 | 5450 | 6750 | 7500 |
| ZB29KQE | P | 30 | 1640 | 1660 | 1670 | 1680 | 1690 | 1700 | |
| | | 35 | 1850 | 1860 | 1870 | 1880 | 1900 | 1910 | |
| | | 45 | 2330 | 2330 | 2340 | 2350 | 2360 | 2380 | 2390 |
| | | 55 | | 2900 | 2920 | 2930 | 2930 | 2940 | 2950 |
| | | 65 | | | 3620 | 3620 | 3640 | 3650 | 3660 |
| | | 75 | | | | 4500 | 4510 | 4520 | 4520 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling 0K

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB38KQE | Q | 30 | 5650 | 7100 | 8900 | 10950 | 13350 | 16000 | |
| | | 35 | 5200 | 6750 | 8400 | 10350 | 12600 | 15250 | |
| | | 45 | 4600 | 5900 | 7600 | 9400 | 11300 | 13700 | 16450 |
| | | 55 | | 5050 | 6500 | 8050 | 10000 | 12150 | 14550 |
| | | 65 | | | 5550 | 6850 | 8550 | 10450 | 12500 |
| | | 75 | | | | 5550 | 7000 | 8650 | 10700 |
| | P | 30 | 2040 | 2040 | 2040 | 2160 | 2160 | 2160 | |
| | | 35 | 2280 | 2280 | 2280 | 2400 | 2400 | 2400 | |
| | | 45 | 2760 | 2880 | 2880 | 2880 | 2880 | 3000 | 3000 |
| | | 55 | | 3600 | 3600 | 3600 | 3600 | 3600 | 3720 |
| | | 65 | | | 4440 | 4440 | 4440 | 4560 | 4560 |
| | | 75 | | | | 5640 | 5640 | 5640 | 5640 |
| ZB45KQE | Q | 30 | 6850 | 8550 | 10700 | 13100 | 16000 | 19100 | |
| | | 35 | 6250 | 8200 | 10200 | 12500 | 15250 | 18250 | |
| | | 45 | 5400 | 7000 | 9000 | 11200 | 13700 | 16450 | 19600 |
| | | 55 | | 6000 | 7600 | 9600 | 12000 | 14550 | 17300 |
| | | 65 | | | 6400 | 8050 | 10100 | 12400 | 14800 |
| | | 75 | | | | 6500 | 8200 | 10200 | 12150 |
| | P | 30 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | |
| | | 35 | 2640 | 2640 | 2640 | 2640 | 2760 | 2760 | |
| | | 45 | 3240 | 3240 | 3360 | 3360 | 3360 | 3360 | 3360 |
| | | 55 | | 4080 | 4080 | 4200 | 4200 | 4200 | 4200 |
| | | 65 | | | 5160 | 5160 | 5160 | 5280 | 5280 |
| | | 75 | | | | 6480 | 6480 | 6480 | 6480 |
| ZB48KQE | Q | 30 | 7700 | 9650 | 11900 | 14550 | 17600 | 21150 | |
| | | 35 | 7100 | 9150 | 11300 | 13850 | 16800 | 20250 | |
| | | 45 | 6250 | 7950 | 10150 | 12450 | 15100 | 18150 | 20750 |
| | | 55 | | 6850 | 8650 | 10750 | 13300 | 16000 | 18300 |
| | | 65 | | | 7250 | 9150 | 11300 | 13750 | 15750 |
| | | 75 | | | | 7450 | 9350 | 11500 | 13050 |
| | P | 30 | 2740 | 2750 | 2760 | 2770 | 2800 | 2840 | |
| | | 35 | 3050 | 3070 | 3080 | 3110 | 3130 | 3180 | |
| | | 45 | 3800 | 3830 | 3850 | 3860 | 3900 | 3950 | 4030 |
| | | 55 | | 4800 | 4810 | 4820 | 4850 | 4900 | 4980 |
| | | 65 | | | 6020 | 6040 | 6050 | 6060 | 6140 |
| | | 75 | | | | 7540 | 7550 | 7560 | 7610 |
| ZB58KQE | Q | 30 | 8950 | 11050 | 13400 | 16100 | 19050 | 22300 | |
| | | 35 | 7500 | 10450 | 12700 | 15250 | 18100 | 21200 | |
| | | 45 | 6500 | 8250 | 11250 | 13550 | 16200 | 18900 | 21950 |
| | | 55 | | 7050 | 8900 | 11150 | 14000 | 16450 | 19150 |
| | | 65 | | | 7350 | 9250 | 11550 | 13900 | 16200 |
| | | 75 | | | | 7300 | 9200 | 11500 | 13100 |
| | P | 30 | 3230 | 3250 | 3310 | 3390 | 3460 | 3500 | |
| | | 35 | 3610 | 3630 | 3690 | 3760 | 3810 | 3830 | |
| | | 45 | 4470 | 4500 | 4560 | 4630 | 4670 | 4660 | 4580 |
| | | 55 | | 5500 | 5590 | 5670 | 5710 | 5700 | 5610 |
| | | 65 | | | 6760 | 6870 | 6940 | 6950 | 6860 |
| | | 75 | | | | 8250 | 8360 | 8390 | 8330 |
| ZB66KQE | Q | 30 | 10250 | 12600 | 15300 | 18400 | 21750 | 25450 | |
| | | 35 | 8550 | 11900 | 14500 | 17450 | 20700 | 24250 | |
| | | 45 | 7450 | 9450 | 12850 | 15500 | 18550 | 21650 | 25050 |
| | | 55 | | 8050 | 10150 | 12750 | 16000 | 18850 | 21900 |
| | | 65 | | | 8400 | 10600 | 13200 | 15850 | 18500 |
| | | 75 | | | | 8400 | 10550 | 13100 | 14950 |
| | P | 30 | 3600 | 3630 | 3690 | 3780 | 3850 | 3900 | |
| | | 35 | 4030 | 4050 | 4120 | 4190 | 4250 | 4270 | |
| | | 45 | 4980 | 5030 | 5100 | 5170 | 5210 | 5200 | 5120 |
| | | 55 | | 6150 | 6250 | 6340 | 6380 | 6370 | 6270 |
| | | 65 | | | 7560 | 7690 | 7770 | 7770 | 7670 |
| | | 75 | | | | 9220 | 9350 | 9390 | 9310 |

* Max return gas temperature of 18.3°C in non shaded region

* Max Suction superheat of 11K only in shaded region

* Sub cooling OK

Performance Data

Q=Capacity (Watts) P=Power input (Watts) 1 & 3-Phase

60 Hz

| Model | Condensing Temperature °C | Evaporating Temperature °C | | | | | | | |
|---------|---------------------------|----------------------------|-------|-------|-------|-------|-------|-------|-------|
| | | -15 | -10 | -5 | 0 | 5 | 10 | 15 | |
| ZB76KQE | Q | 30 | 11750 | 14450 | 17600 | 21100 | 25000 | 29200 | |
| | | 35 | 9800 | 13650 | 16650 | 20000 | 23750 | 27800 | |
| | | 45 | 8500 | 10800 | 14700 | 17750 | 21250 | 24800 | 28700 |
| | | 55 | | 9200 | 11650 | 14550 | 18300 | 21550 | 25050 |
| | | 65 | | | 9650 | 12100 | 15100 | 18150 | 21200 |
| | | 75 | | | | 9600 | 12050 | 15000 | 17150 |
| | | P | 30 | 4220 | 4250 | 4340 | 4440 | 4520 | 4560 |
| | 35 | | 4730 | 4750 | 4830 | 4920 | 4980 | 5000 | |
| | 45 | | 5840 | 5890 | 5960 | 6040 | 6090 | 6080 | 5970 |
| | 55 | | | 7190 | 7290 | 7390 | 7450 | 7430 | 7300 |
| | 65 | | | | 8820 | 8960 | 9040 | 9040 | 8930 |
| | 75 | | | | | 10740 | 10880 | 10930 | 10840 |

- * Max return gas temperature of 18.3°C in non shaded region
- * Max Suction superheat of 11K only in shaded region
- * Sub cooling 0K


Technical Data

| Model | | ZB15KQ ZB15KQE | ZB19KQ ZB19KQE | ZB21KQ ZB21KQE | ZB26KQ ZB26KQE | ZB29KQ ZB29KQE | ZB38KQ ZB38KQE | ZB45KQ ZB45KQE | | |
|--|------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------------|------|
| Motor type | 50Hz | PFJ | PFJ | PFJ | PFJ | PFJ | | | | |
| | | TF5 | TF5 | TF5 | TF5 | TF5 | TF5 | TF5 | | |
| | | TFD | TFD | TFD | TFD | TFD | TFD | TFD | | |
| | 60Hz | PFV | PFV | PFV | PFV | PFV | | | | |
| | | TF5 | TF5 | TF5 | TF5 | TF5 | TF5 | TF5 | | |
| | | TF7 | TF7 | TF7 | TF7 | TF7 | TF7 | TF7 | | |
| TFD | | TFD | TFD | TFD | TFD | TFD | TFD | | | |
| Displacement (M ³ /HR) | | 50Hz | 5.9 | 6.8 | 8.6 | 9.9 | 11.4 | 14.4 | 17.1 | |
| | | 60Hz | 7.1 | 8.2 | 10.4 | 12.0 | 13.8 | 17.3 | 20.6 | |
| LRA | 50Hz | PFJ | 58.0 | 61.0 | 82.0 | 97.0 | 114.0 | | | |
| | | TF5/TW5 | 56.0 | 70.0 | 83.0 | 95.0 | 98.0 | 139.0 | 172.0 | |
| | | TFD | 26.0 | 32.0 | 40.0 | 46.0 | 50.0 | 65.5 | 74.0 | |
| | 60Hz | PFV | 61.0 | 72.5 | 95.0 | 109.0 | 137.0 | | | |
| | | TF5/TW5 | 55.0 | 63.0 | 77.0 | 88.0 | 91.0 | 128.0 | 156.0 | |
| | | TF7/TW7 | 27.0 | 30.0 | 39.0 | 41.0 | 54.0 | 64.0 | 70.0 | |
| | | TFD | 27.0 | 31.0 | 39.0 | 44.0 | 50.0 | 63.0 | 75.0 | |
| RLA | KQ | PFJ | 11.4 | 12.9 | 16.4 | 17.1 | 19.3 | | | |
| | | PFV | 13.6 | 15.0 | 18.4 | 20.4 | 22.1 | | | |
| | | TF5/TW5 | 8.9 | 10.0 | 11.4 | 13.9 | 16.4 | 20.7 | 20.7 | |
| | | TF7/TW7 | 5.0 | 5.8 | 7.5 | 7.3 | 9.3 | 10.7 | 10.7 | |
| | | TFD | 4.3 | 4.3 | 5.7 | 7.1 | 7.9 | 10.0 | 11.5 | |
| | KQE | PFJ | 13.2 | 14.6 | 15.4 | 18.9 | 20.0 | | | |
| | | PFV | 15.7 | 17.1 | 20.7 | 23.6 | 25.0 | | | |
| | | TF5/TW5 | 8.9 | 10.0 | 12.1 | 13.2 | 17.1 | 24.0 | 26.0 | |
| | | TF7/TW7 | 5.1 | 5.9 | 7.4 | 7.6 | 9.6 | 12.4 | 12.6 | |
| | | TFD | 5.0 | 5.0 | 7.4 | 6.4 | 7.9 | 9.6 | 10.1 | |
| Max Continuous Current | KQ | PFJ | 16.0 | 18.0 | 23.0 | 24.0 | 27.0 | | | |
| | | PFV | 19.0 | 21.0 | 25.8 | 28.6 | 31.0 | | | |
| | | TF5/TW5 | 12.5 | 14.0 | 16.0 | 19.4 | 23.0 | 29.0 | 29.0 | |
| | | TF7/TW7 | 7.0 | 8.1 | 10.5 | 10.2 | 13.0 | 15.0 | 15.0 | |
| | | TFD | 6.0 | 6.0 | 8.0 | 10.0 | 11.0 | 13.5 | 16.1 | |
| | KQE | PFJ | 18.5 | 20.5 | 21.5 | 26.5 | 28.0 | | | |
| | | PFV | 22.0 | 24.0 | 29.0 | 33.0 | 35.0 | | | |
| | | TF5/TW5 | 12.5 | 14.0 | 17.0 | 18.5 | 24.0 | 33.6 | 32.4 | |
| | | TF7/TW7 | 7.2 | 8.3 | 10.3 | 10.7 | 13.5 | 17.4 | 17.7 | |
| | | TFD | 7.0 | 7.0 | 10.3 | 9.0 | 11.0 | 14.0 | 14.2 | |
| Run Capacitor (1 phase) | 50Hz | PFJ | 40/440 | 45/370 | 60/370 | 60/370 | 60/370 | | | |
| Run Capacitor (1 phase) | 60Hz | PFV | 40/370 | 45/370 | 50/370 | 60/370 | 60/440 | | | |
| Nominal power(HP) | | | 2 | 2.5 | 3 | 3.5 | 4 | 5 | 6 | |
| Crankcase Heater(W) | | | 70 | 70 | 70 | 70 | 70 | 70 | 70 | |
| Connection Tube size(inch) | | | | | | | | | | |
| Discharge Tube outer Diameter | | | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | |
| Suction Tube outer Diameter | | | 3/4 | 3/4 | 3/4 | 3/4 | 7/8 | 7/8 | 7/8 | |
| Dimension(mm) | | | | | | | | | | |
| Length | | | 242 | 242 | 243 | 243 | 242 | 242 | 242 | |
| Width | | | 242 | 242 | 244 | 244 | 242 | 242 | 242 | |
| Height | | | 383 | 389 | 412 | 425 | 430 | 457 | 457 | |
| Mounting pants installation size (hole size) | | | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | |
| Oil Recharge(L) | | | | | | | | | | |
| | | | PFJ/PFV | 1.24 | 1.30 | 1.45 | 1.45/1.48 | 1.36 | | |
| | | | TFD/TF5/TF7 | 1.24 | 1.36 | 1.45 | 1.48 | 1.36 | 2.07 | 1.89 |
| Weight(kg) | | | | | | | | | | |
| Net | | | 23 | 25 | 27 | 28 | 33 | 38 | 40 | |
| Gross | | | 26 | 29 | 30 | 31 | 37 | 41 | 44 | |

Technical Data



| Model | | ZB48KQ ZB48KQE | ZB58KQ ZB58KQE | ZB66KQ ZB66KQE | ZB76KQ ZB76KQE | ZB88KQ | ZB95KQ | ZB114KQ | |
|--|------|-------------------|-------------------|-------------------|-------------------|--------------|--------------|--------------|-------|
| Motor type | 50Hz | TF5 | TF5 | TF5 | TF5 | TF5 | | | |
| | | TFD | TFD | TFD | TFD | TFD | TFD | TFD | |
| | | | | | | | TW5 | TW5 | |
| | 60Hz | TF5 | TF5 | TF5 | TF5 | TF5 | | | |
| | | TF7 | TF7 | TF7 | TF7 | TF7 | | | |
| | | TFD | TFD | TFD | TFD | TFD | TFD | TFD | |
| | | | | | | TW5 | TW5 | | |
| Displacement (M ³ /HR) | 50Hz | 18.8 | 22.1 | 25.7 | 28.8 | 33.2 | 36.4 | 43.3 | |
| | 60Hz | 22.6 | 26.7 | 31.0 | 34.8 | 40.1 | 43.9 | 52.3 | |
| LRA | 50Hz | PFJ | | | | | | | |
| | | TF5/TW5 | 179.0 | 203.0 | 231.0 | 239.0 | 273.0 | | |
| | | TFD | 101.0 | 95.0 | 111.0 | 118.0 | 118.0 | 140.0 | 174.0 |
| | 60Hz | PFV | | | | | | | |
| | | TF5/TW5 | 164.0 | 195.0 | 225.0 | 239.0 | 245.0 | 300.0 | 340.0 |
| | | TF7/TW7 | 100.0 | 123.0 | 140.0 | 145.0 | 145.0 | 139.0 | 196.0 |
| RLA | KQ | TFD | 100.0 | 95.0 | 114.0 | 125.0 | 125.0 | 150.0 | 179.0 |
| | | PFJ | | | | | | | |
| | | PFV | | | | | | | |
| | KQE | TF5/TW5 | 25.0 | 32.1 | 33.6 | 41.4 | 47.1 | 53.6 | 58.6 |
| | | TF7/TW7 | 12.1 | 16.7 | 18.6 | 23.6 | 24.4 | 28.6 | 35.7 |
| | | TFD | 12.1 | 16.4 | 17.3 | 20.0 | 22.1 | 25.0 | 27.9 |
| Max Continuous Current | KQ | PFJ | | | | | | | |
| | | PFV | | | | | | | |
| | | TF5/TW5 | 35.0 | 45.0 | 47.0 | 54.0 | 66.0 | 75.0 | 82.0 |
| | KQE | TF7/TW7 | 17.0 | 23.4 | 26.0 | 33.1 | 34.2 | 40.0 | 50.0 |
| | | TFD | 17.0 | 23.0 | 24.2 | 26.9 | 31.0 | 35.0 | 42.0 |
| | | PFJ | | | | | | | |
| Run Capacitor (1 phase) | 60Hz | PFV | | | | | | | |
| | | TF5/TW5 | 36.4 | 43.0 | 44.0 | 58.0 | | 86.0 | 91.0 |
| | | TF7/TW7 | | 24.0 | 29.0 | 33.0 | | 49.0 | 60.0 |
| Run Capacitor (1 phase) | 50Hz | TFD | 19.1 | 23.0 | 24.5 | 28.0 | | 37.0 | 40.0 |
| Nominal power(HP) | | 7 | 8 | 9 | 10 | 12 | 13 | 15 | |
| Crankcase Heater(W) | | 70 | 90 | 90 | 90 | 90 | 90 | 90 | |
| Connection Tube size(inch) | | | | | | | | | |
| Discharge Tube outer Diameter | | 3/4 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | 7/8 | |
| Suction Tube outer Diameter | | 7/8 | 1 1/8 | 1 3/8 | 1 3/8 | 1 3/8 | 1 3/8 | 1 3/8 | |
| Dimension(mm) | | | | | | | | | |
| Length | | 242 | 264 | 264 | 264 | 264 | 264 | 264 | |
| Width | | 242 | 284 | 284 | 284 | 284 | 285 | 285 | |
| Height | | 457 | 477 | 546 | 546 | 546 | 552 | 553 | |
| Mounting pants installation size (hole size) | | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | 190x190(8.5) | |
| Oil Recharge(L) | | | | | | | | | |
| TFD/TF5/TF7 | | 1.80 | 2.51 | 3.25 | 3.25 | 3.25 | 3.30 | 3.30 | |
| Weight(kg) | | | | | | | | | |
| Net | | 40 | 57 | 59 | 62 | 62 | 62 | 63 | |
| Gross | | 44 | 60 | 62 | 65 | 65 | 65 | 66 | |

ZB15~ZB29 (BOM 524)

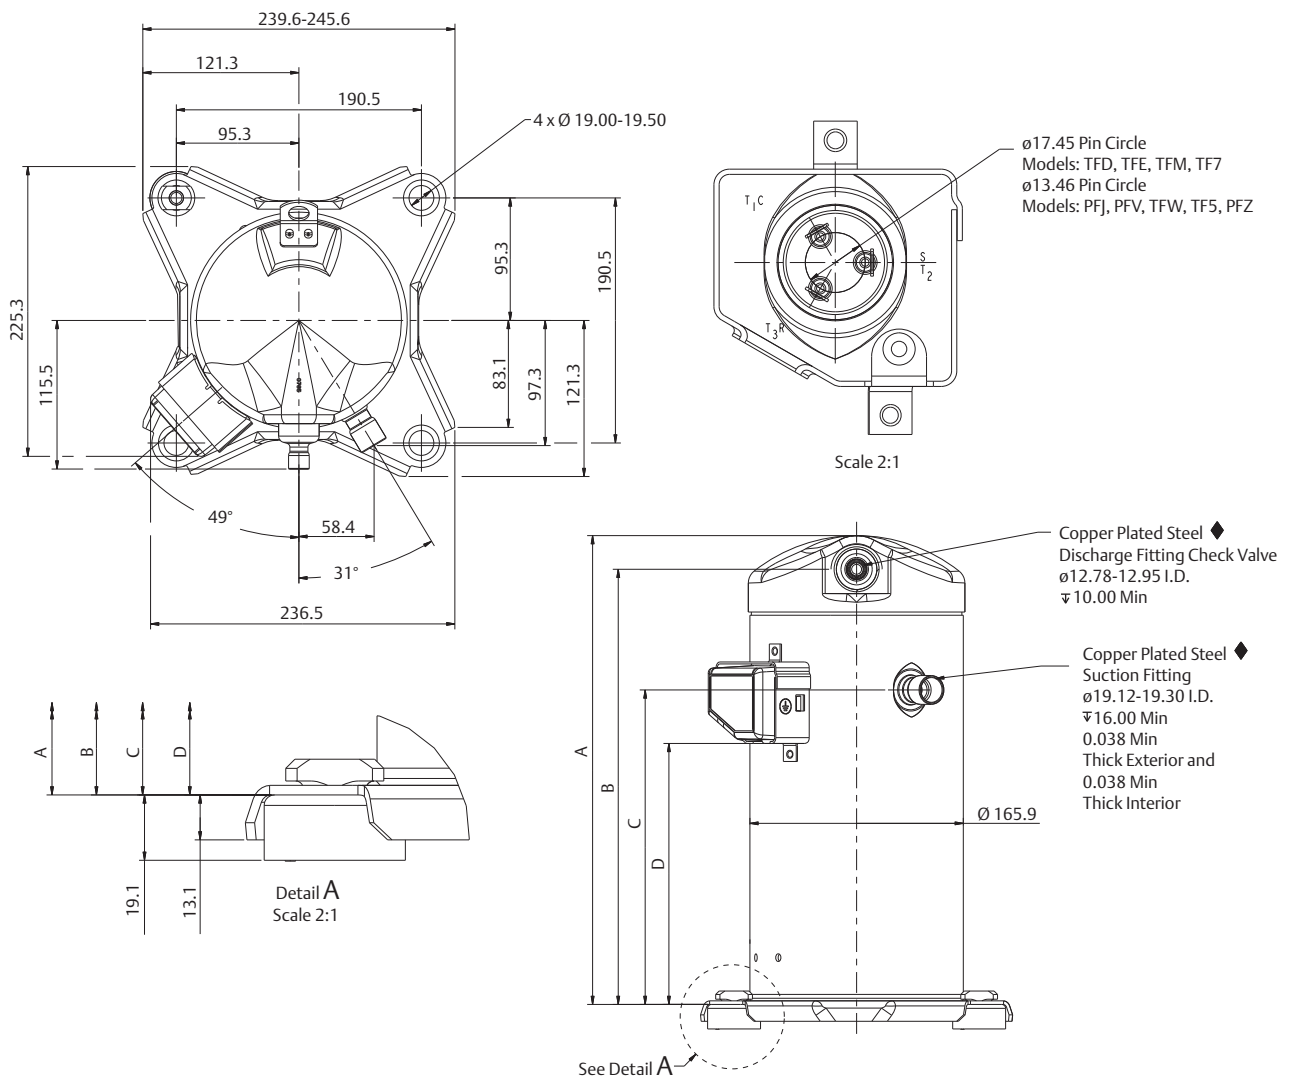



| Compressor model | A±3 | B±3 | C±3 | D±3 |
|------------------|-------|-------|-------|-------|
| ZB15KQ/ZB15KQE | 363.8 | 338.3 | 244.5 | 202.9 |
| ZB19KQ/ZB19KQE | | | | |
| ZB21KQ/ZB21KQE | 386.4 | 360.9 | 264.4 | 222.8 |
| ZB26KQ/ZB26KQE | 400.2 | 374.6 | 277.1 | 235.5 |
| ZB29KQ/ZB29KQE | 417.8 | 389.9 | 294.1 | 252.5 |

ZB38~ZB48 (BOM 524)

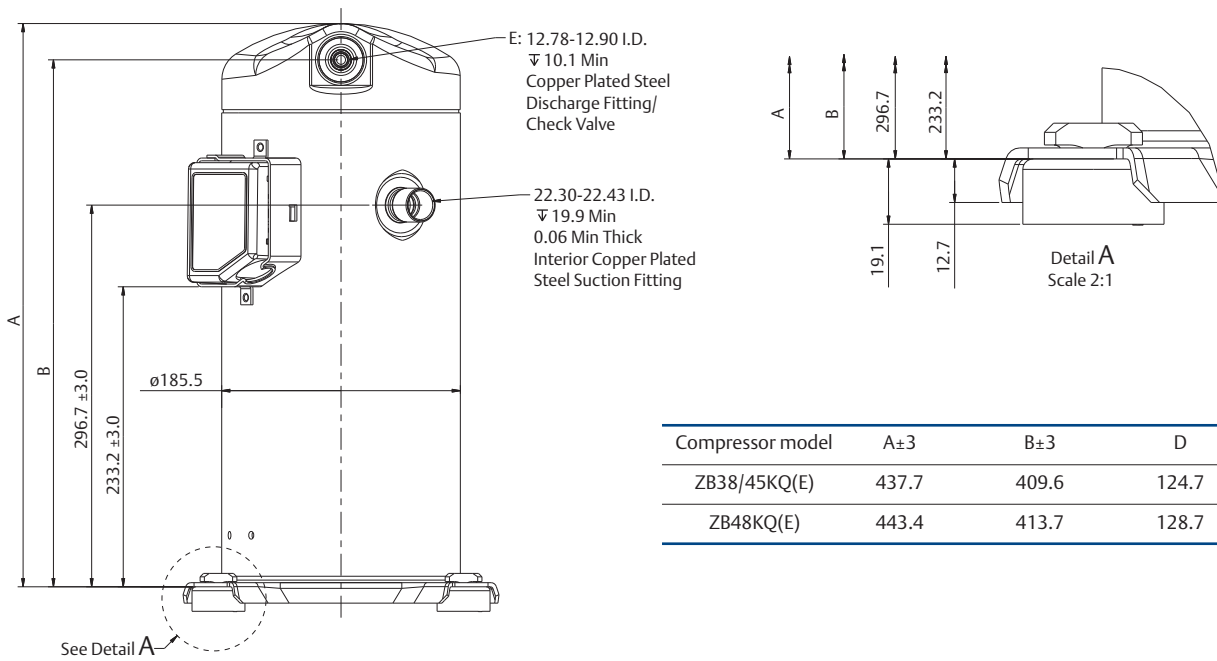
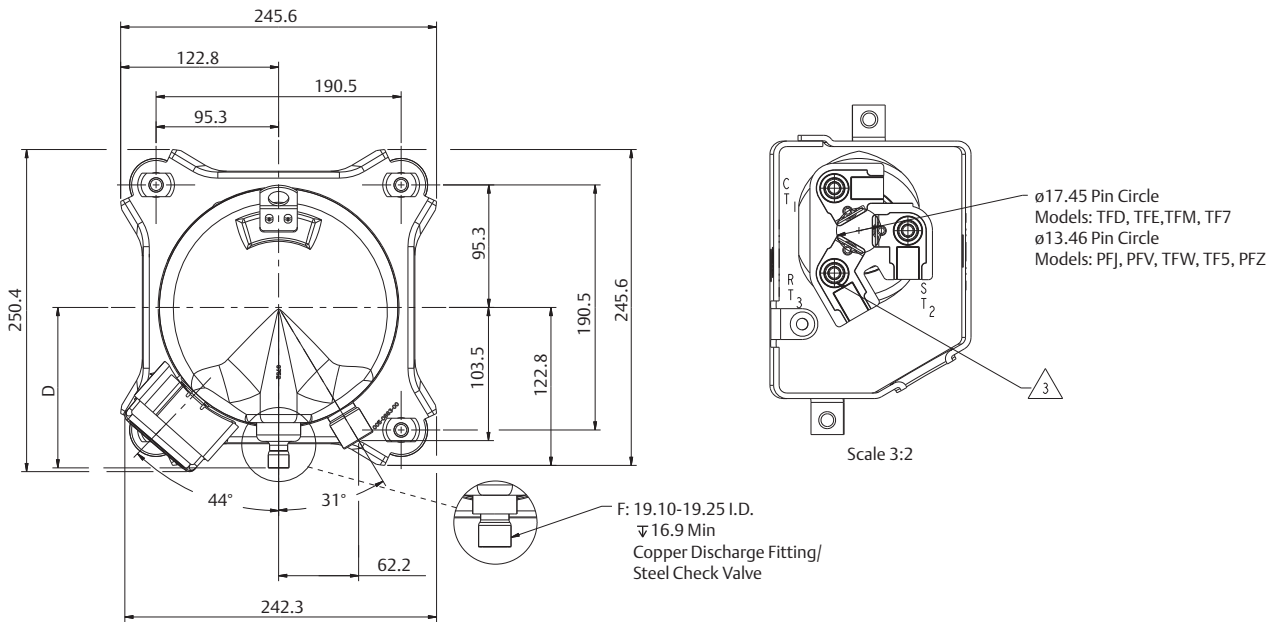


| Compressor model | A \pm 3 | B \pm 3 | D |
|------------------|-----------|-----------|-------|
| ZB38/45KQ(E) | 437.7 | 409.6 | 124.7 |
| ZB48KQ(E) | 443.4 | 413.7 | 128.7 |

ZB58 (BOM 524)

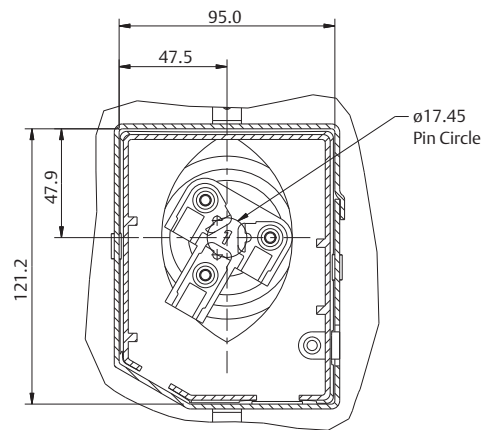
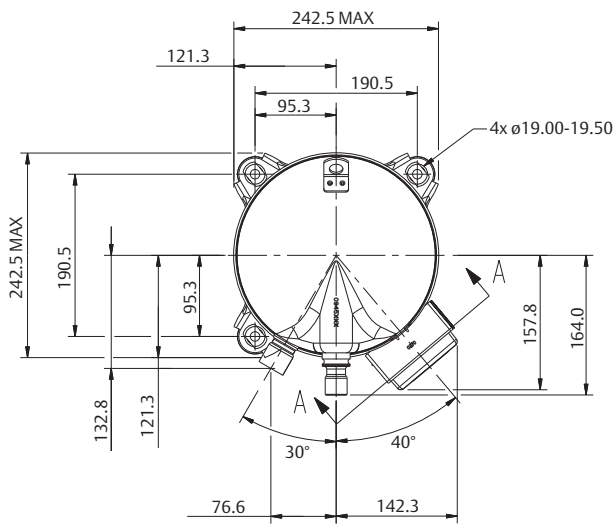


Section A-A
Scale 1:1

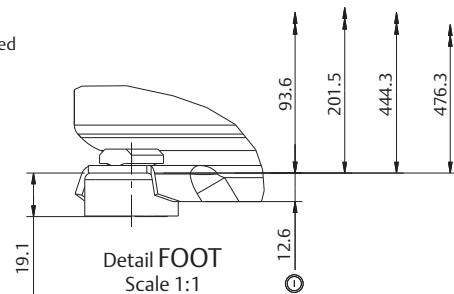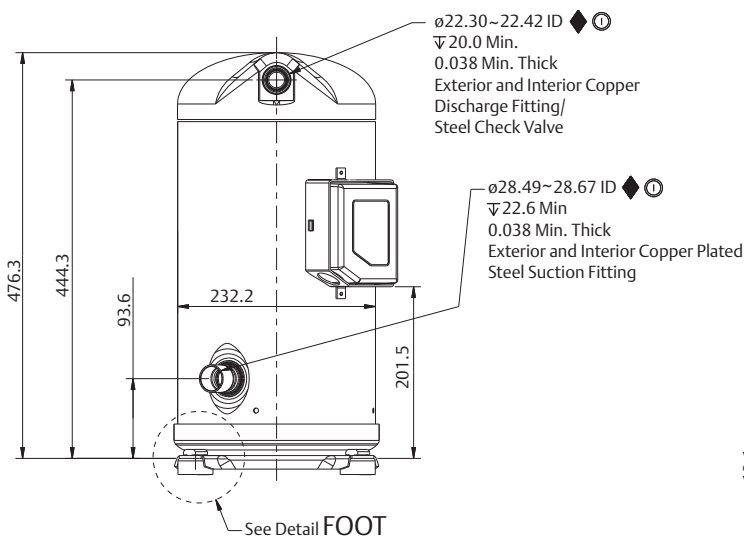



Detail FOOT
Scale 1:1

ZB66~ZB88 (BOM 524)

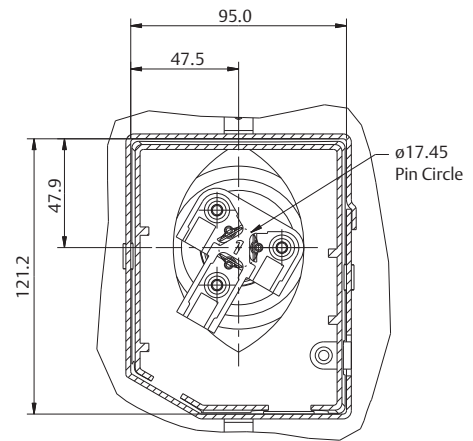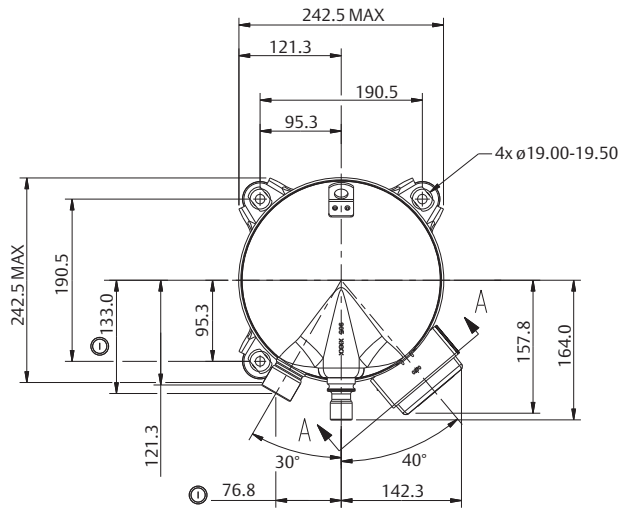

T-Box layout
Standard

Section A-A
Scale 1:1

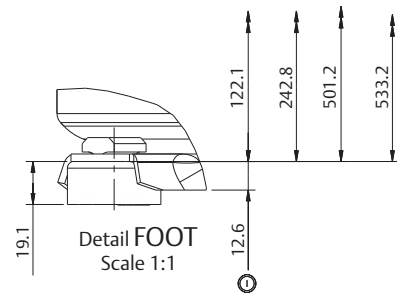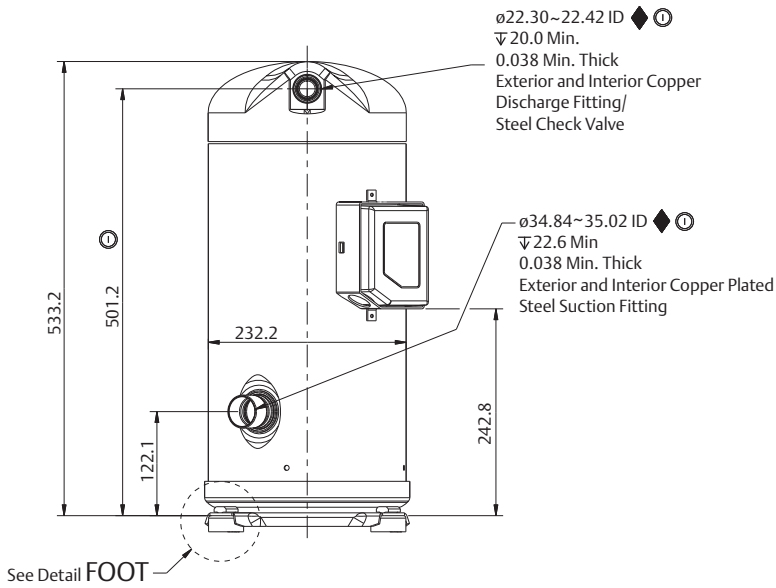





Detail FOOT
Scale 1:1

ZB Series

Dimensions



Rotalock Connection

ZB15~ZB29 (BOM 523)

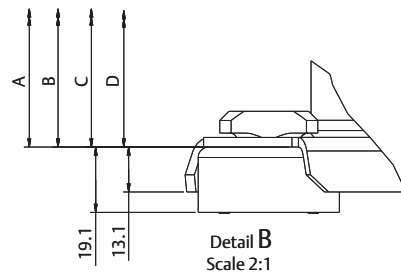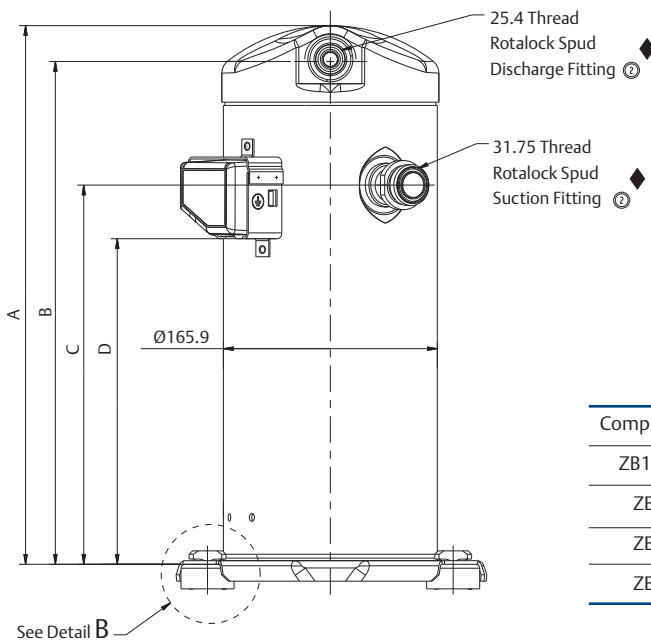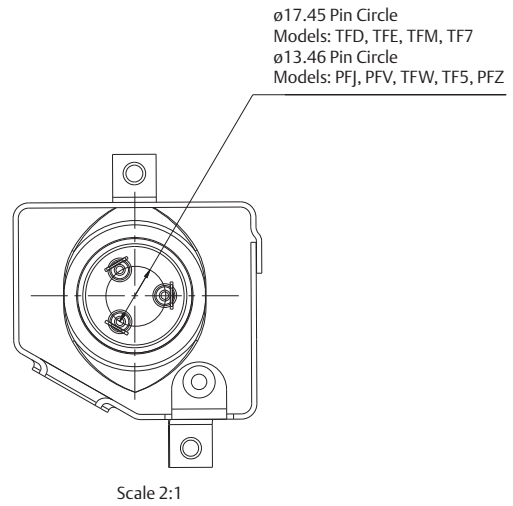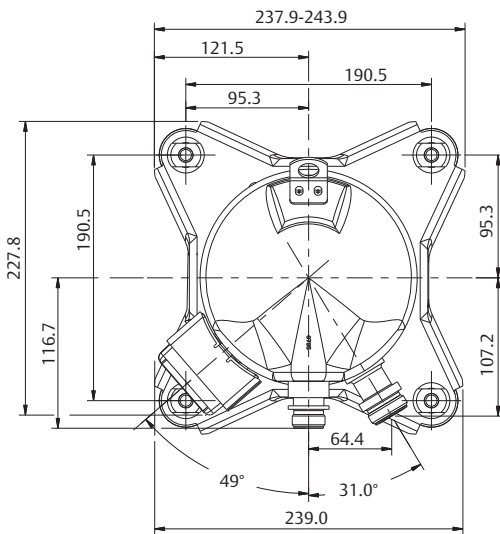


| Compressor model | A±3 | B | C | D±3 | |
|------------------|-------|-------|-------|-------|-----|
| ZB15/19KQ(E) | 363.8 | 338.3 | 244.5 | 202.9 | ① |
| ZB21KQ(E) | 386.4 | 360.9 | 264.4 | 222.8 | ① |
| ZB26KQ(E) | 400.8 | 372.9 | 277.1 | 235.5 | ① ② |
| ZB29KQ(E) | 417.8 | 389.9 | 294.1 | 252.5 | ① |


ZB38~ZB48 (BOM 523)

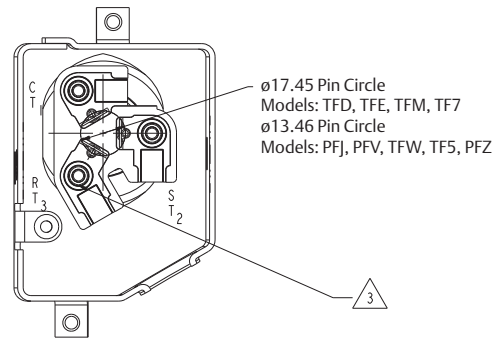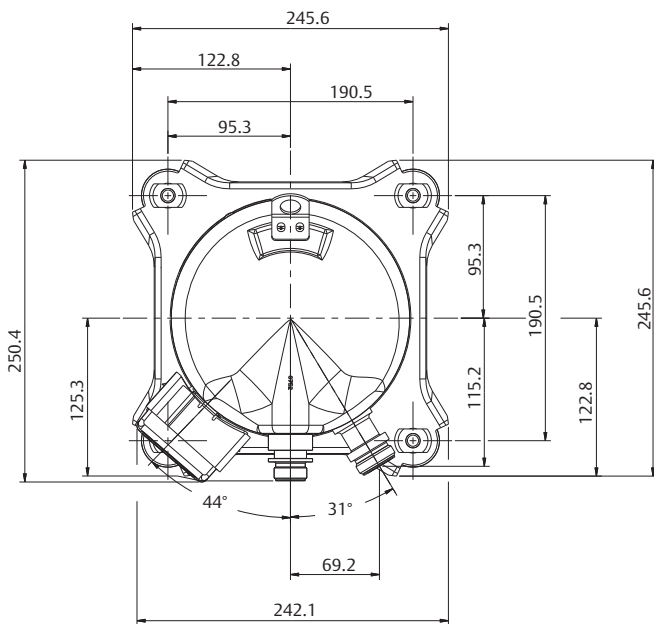



Terminal Box Layout Options
Terminal Box Cover Not Shown
View A-A
Scale 3:2

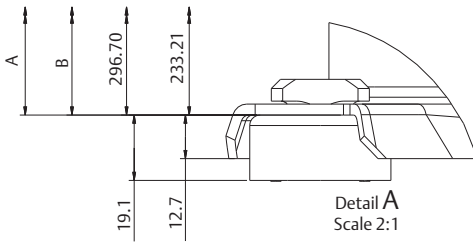

| Compressor model | A±3 | B±3 |
|------------------|-------|-------|
| ZB38/45KQ(E) | 437.7 | 409.6 |
| ZB48KQ(E) | 443.4 | 413.7 |


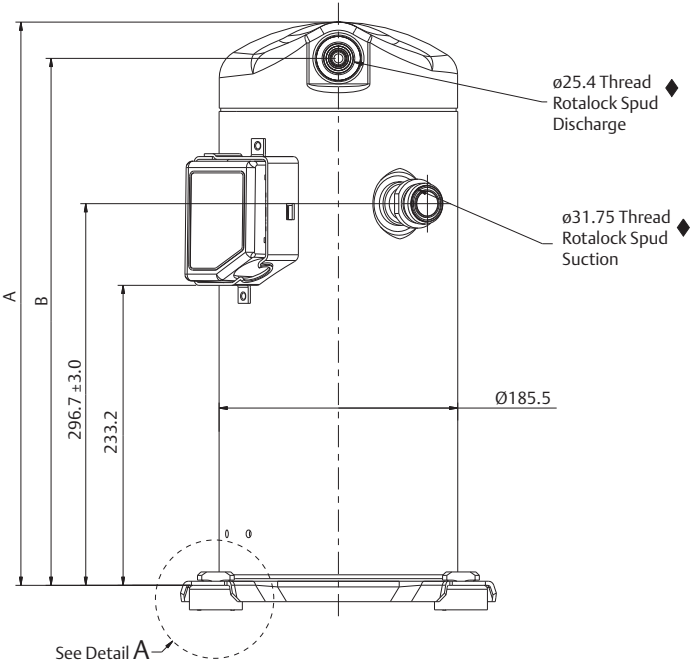


ZB58 (BOM 523)

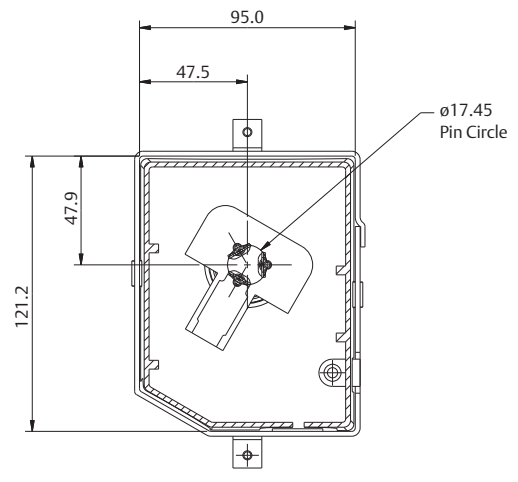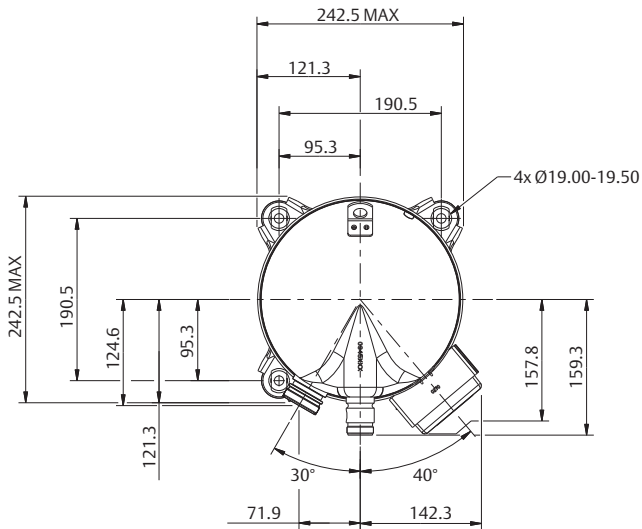



T-Box layout
Standard

Section A-A
Scale 1:1

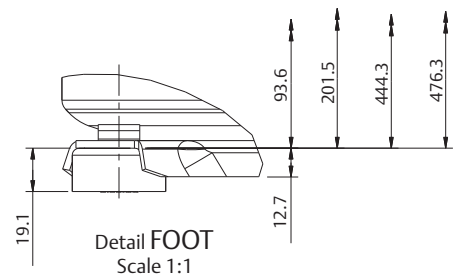
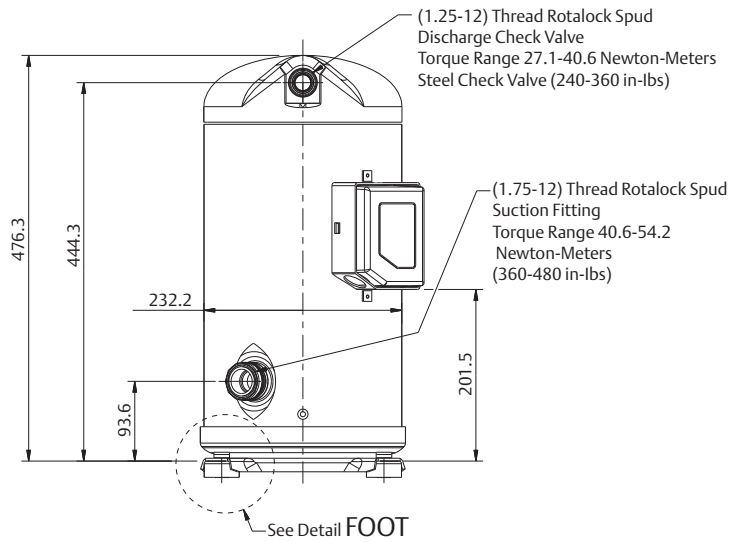


Detail FOOT
Scale 1:1

ZB66~ZB88 (BOM 523)



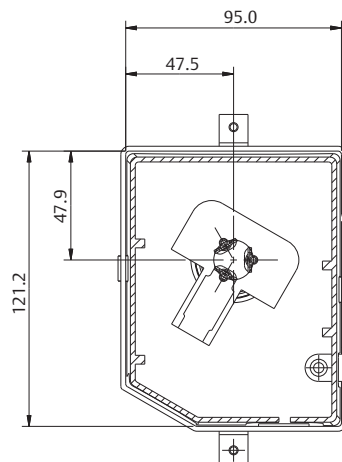
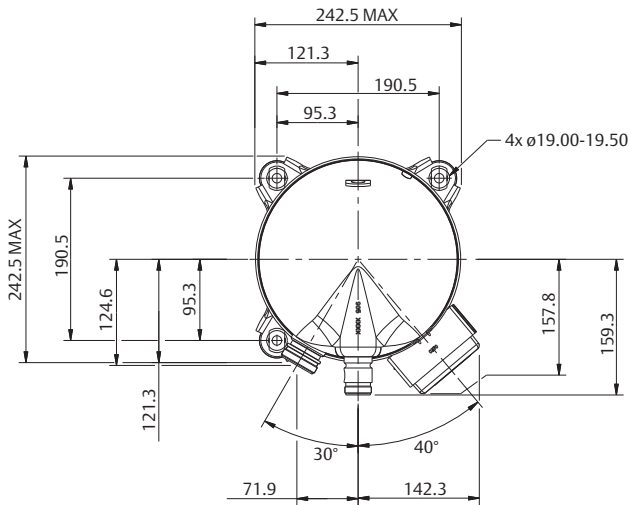


Section A-A
Scale 1:1

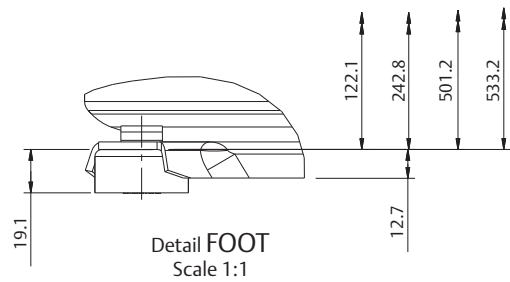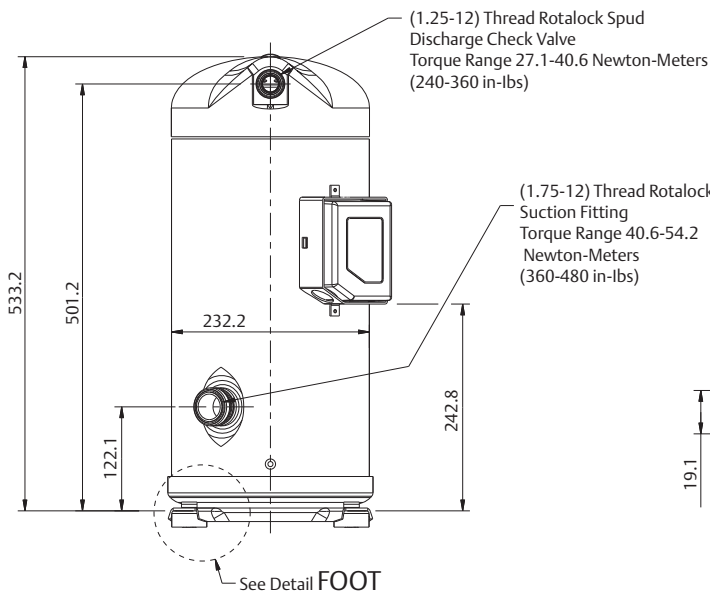




Detail FOOT
Scale 1:1

ZB15~ZB29 (BOM 558)

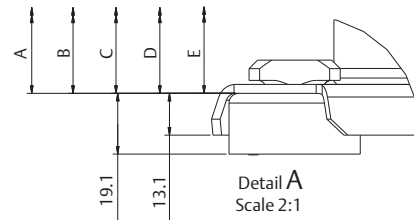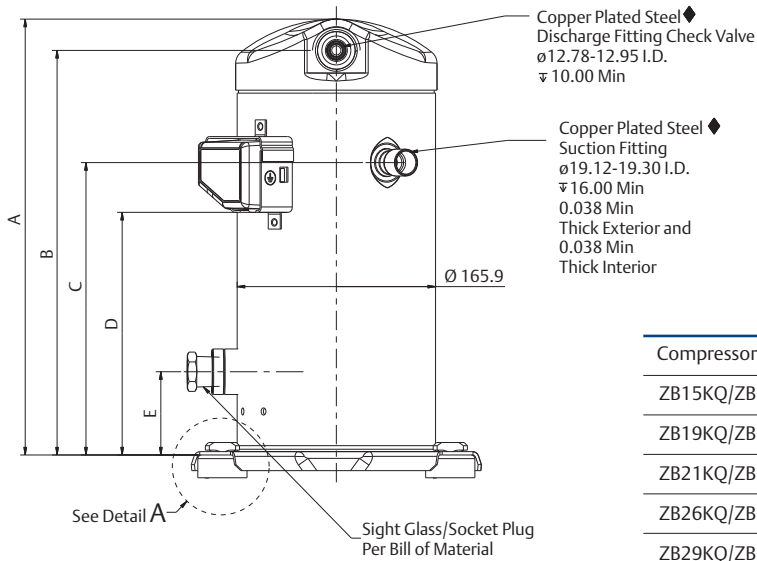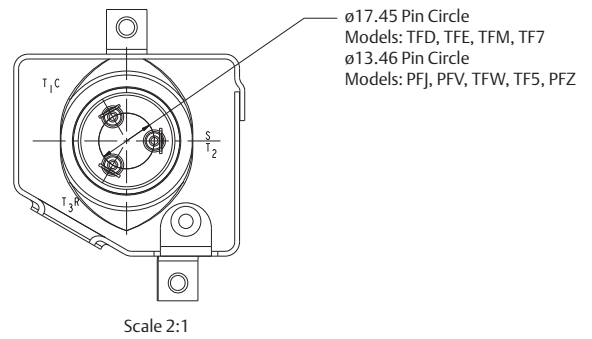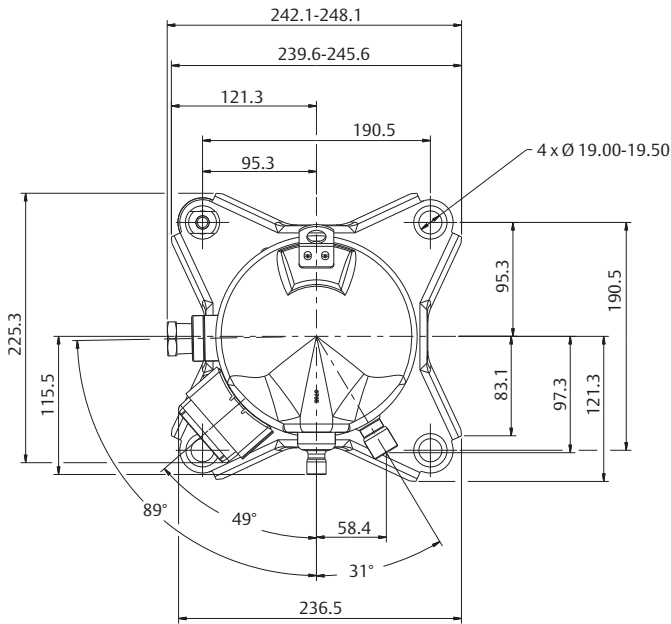





| Compressor model | A ± 3 | B ± 3 | C ± 3 | D ± 3 | E ± 3 |
|------------------|-----------|-----------|-----------|-----------|-----------|
| ZB15KQ/ZB15KQE | 363.8 | 338.3 | 244.5 | 202.9 | 69.6 |
| ZB19KQ/ZB19KQE | | | | | |
| ZB21KQ/ZB21KQE | 386.4 | 360.9 | 264.4 | 222.8 | 64.9 |
| ZB26KQ/ZB26KQE | 400.2 | 372.9 | 277.1 | 235.5 | 77.6 |
| ZB29KQ/ZB29KQE | 417.8 | 389.9 | 294.1 | 252.5 | 67.4 |

ZB38~ZB48 (BOM 558)

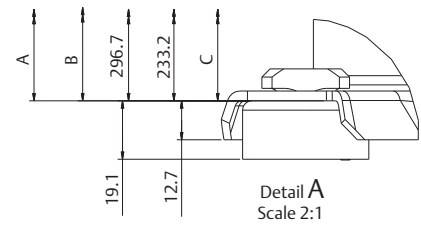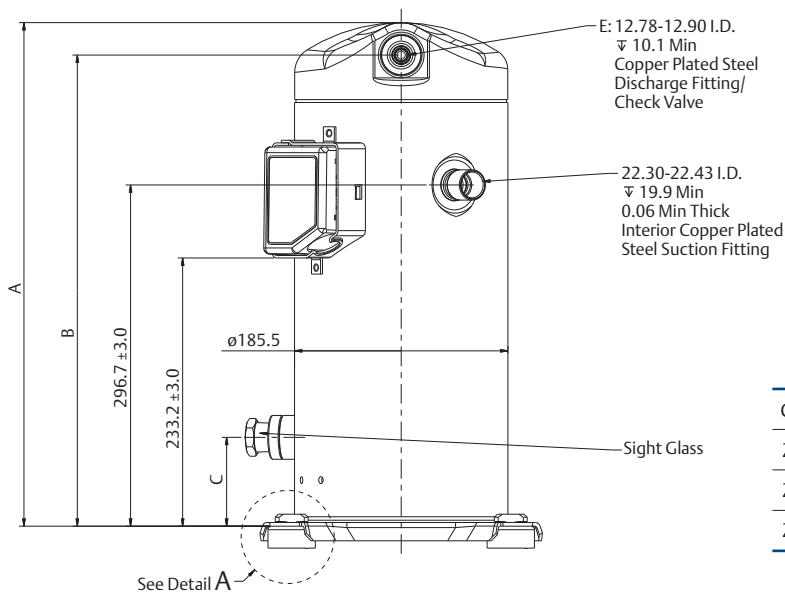
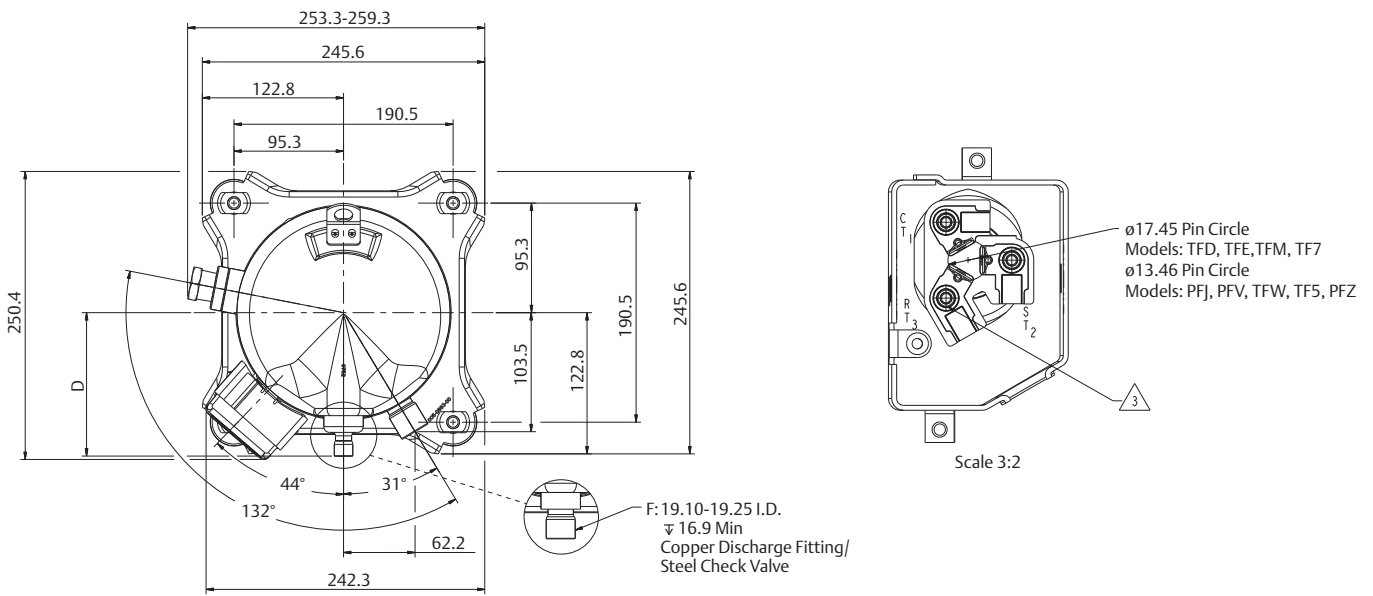


| Compressor model | A±3 | B±3 | C±3 | D |
|------------------|-------|-------|------|-------|
| ZB38KQ/ZB38KQE | 437.7 | 409.6 | 91.3 | 124.7 |
| ZB45KQ/ZB45KQE | 437.7 | 409.6 | 77.2 | 124.7 |
| ZB48KQ/ZB48KQE | 443.4 | 413.7 | 77.2 | 128.7 |






ZB58 (BOM 550)

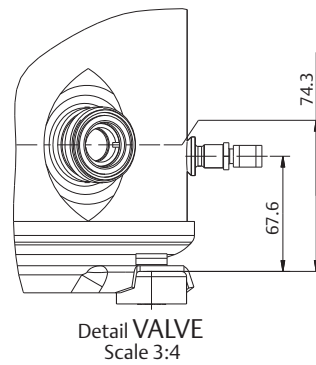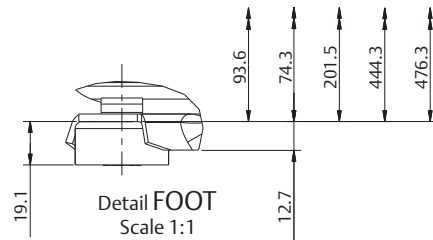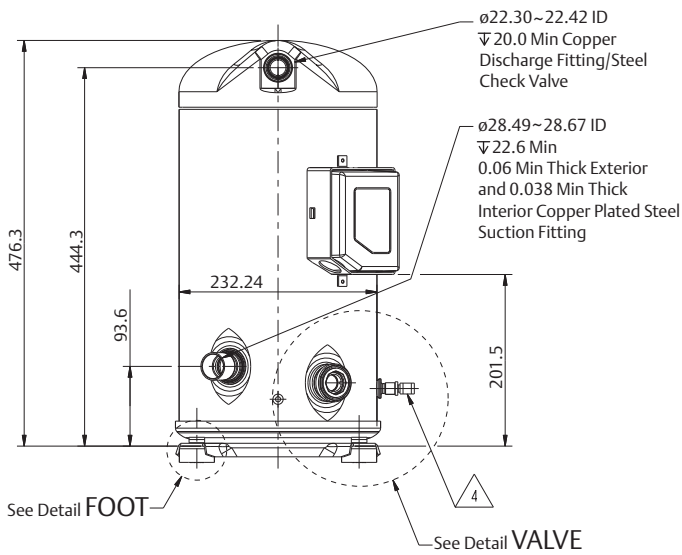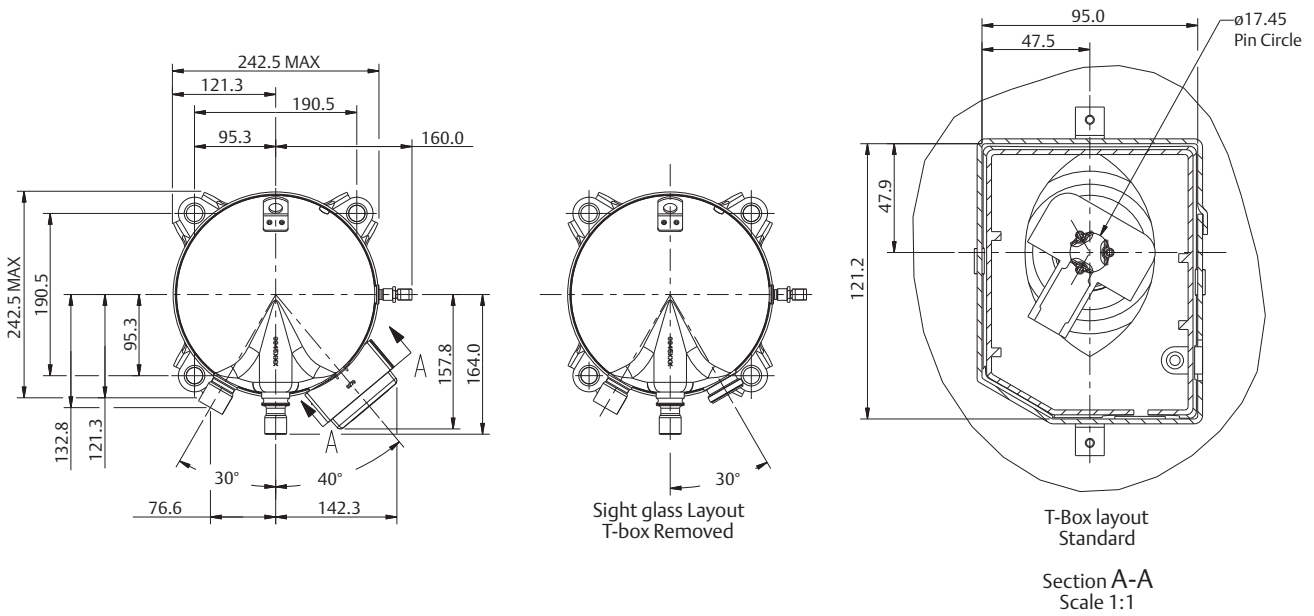



ZB66~ZB88 (BOM 550)

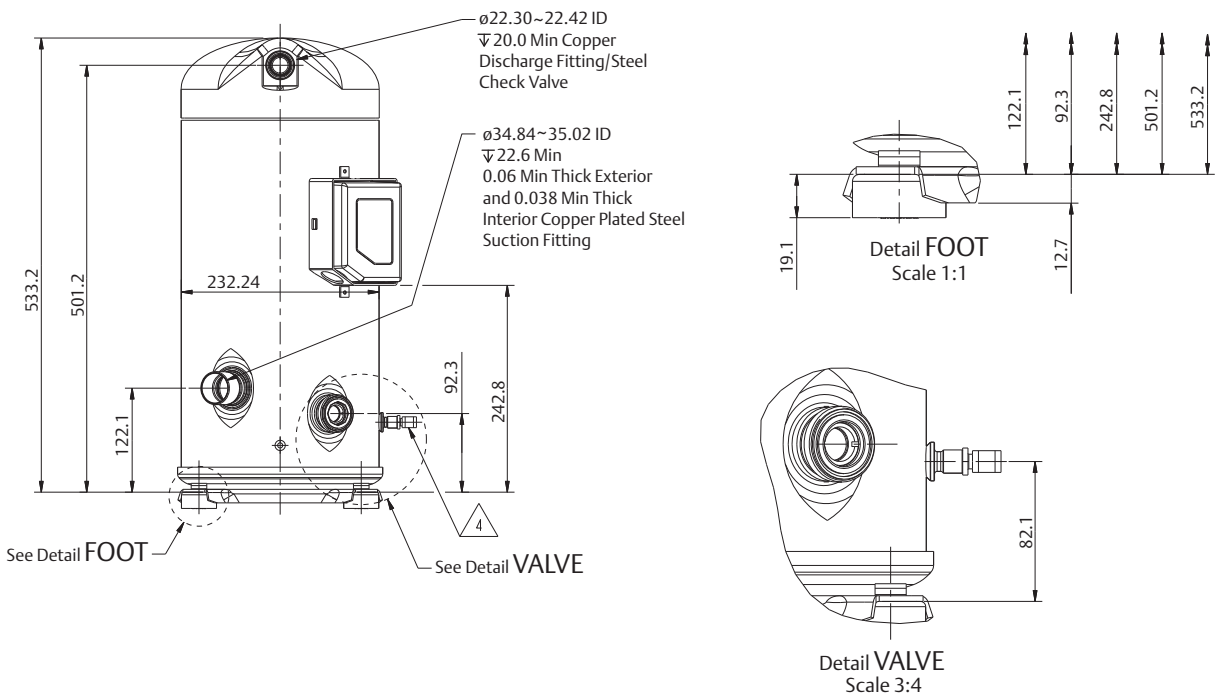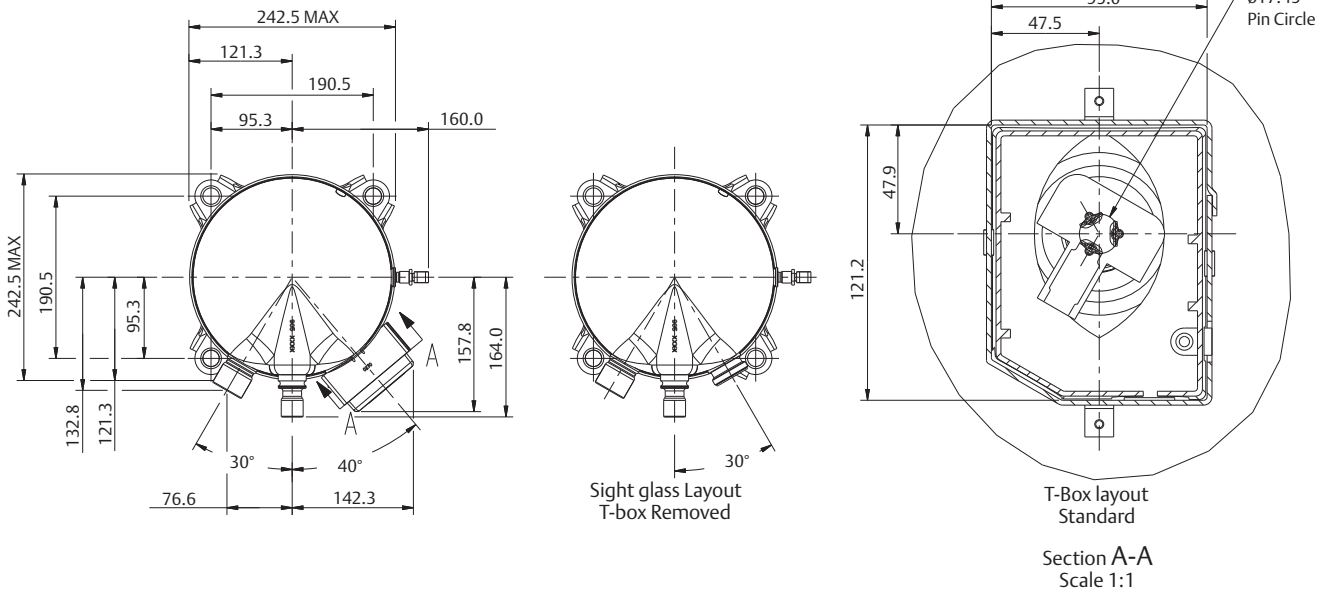



ZB95~ZB114 TFD (BOM 550)

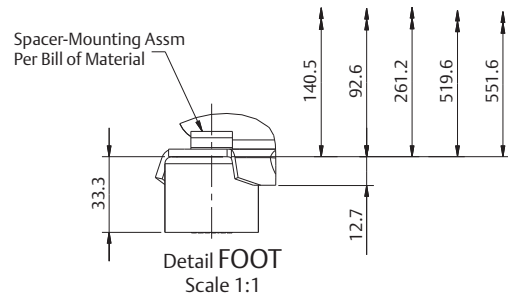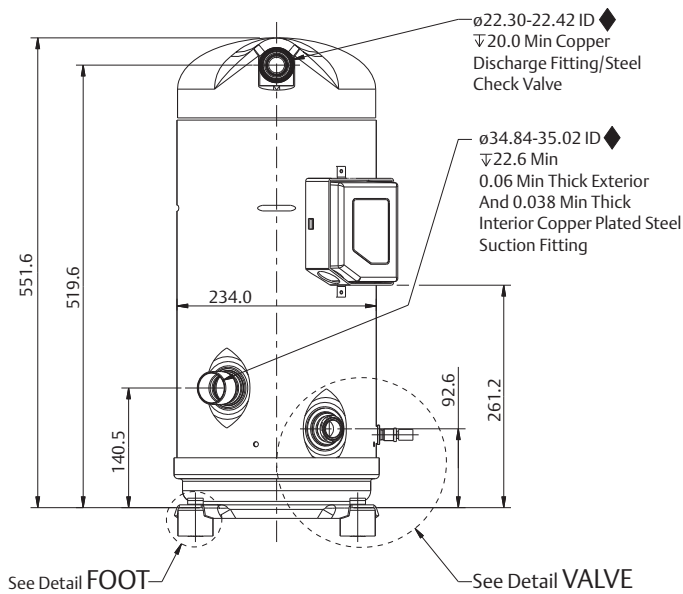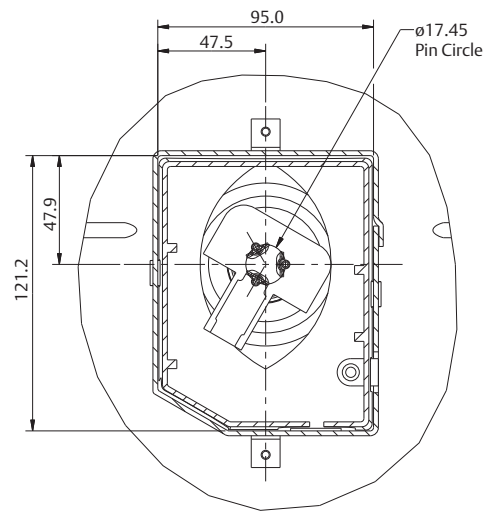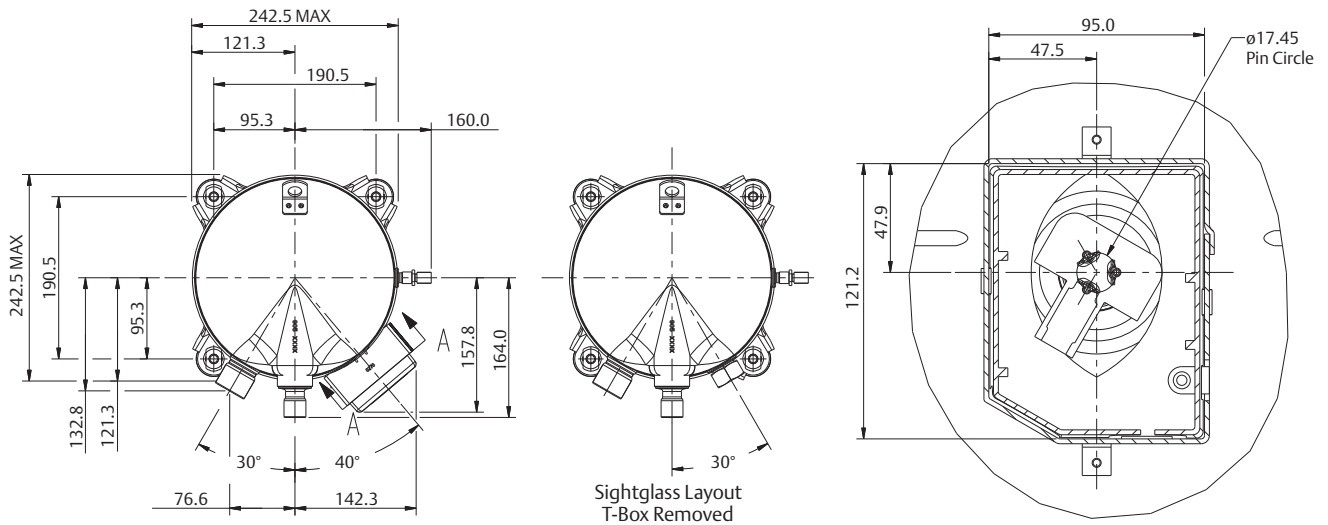


ZB95~ZB114 TW7/TW5 (BOM 550)

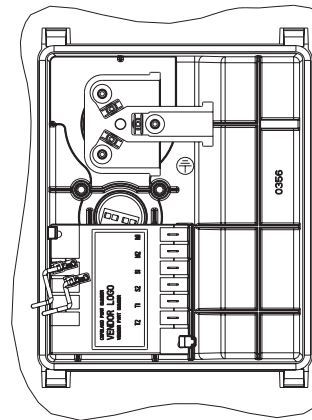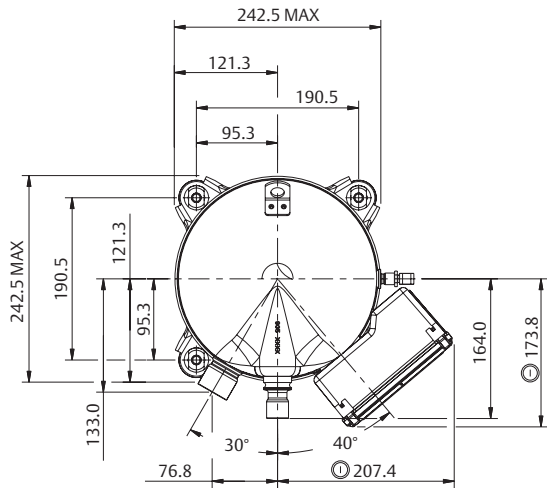

Terminal Box layout Standard ①
Scale 3:4

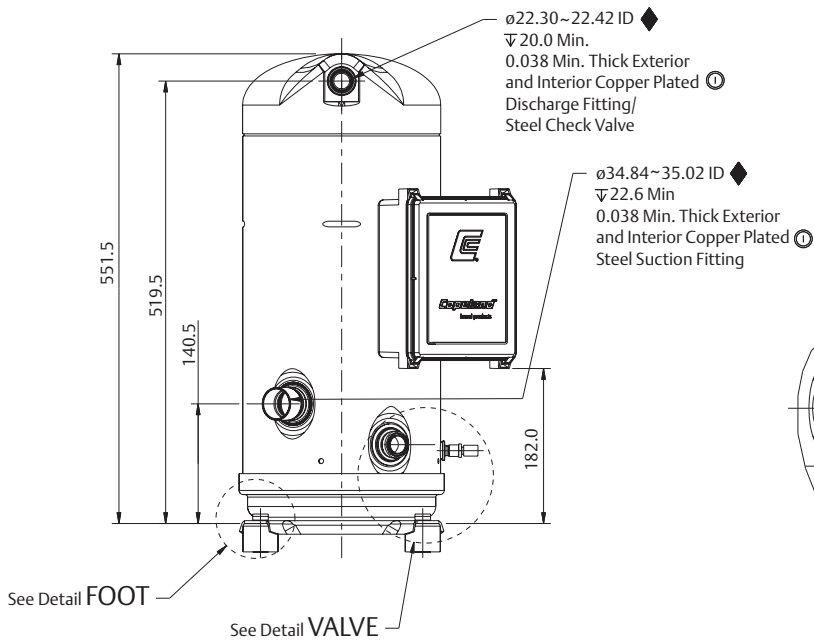


Detail FOOT
Scale 1:1




Detail VALVE
Scale 3:4



ZB15~ZB29 (BOM 559)

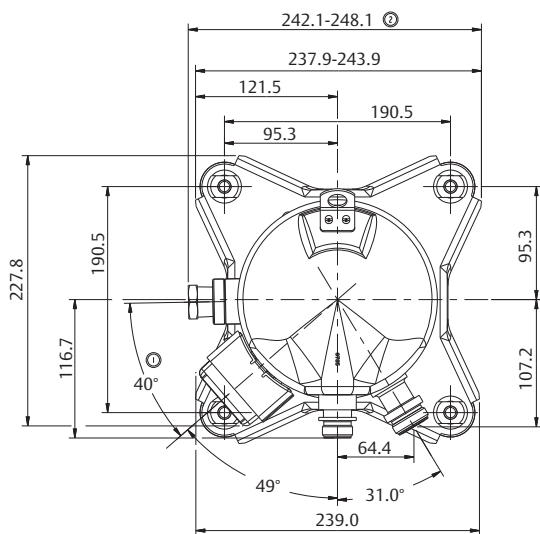

ø17.45 Pin Circle
 Models: TFD, TFE, TFM, TF7
 ø13.46 Pin Circle
 Models: PFJ, PFV, TFW, TF5, PFZ


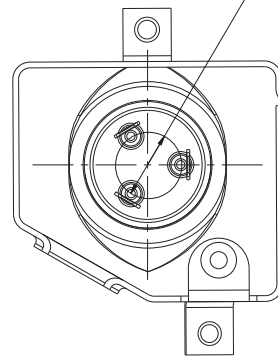


Scale 2:1

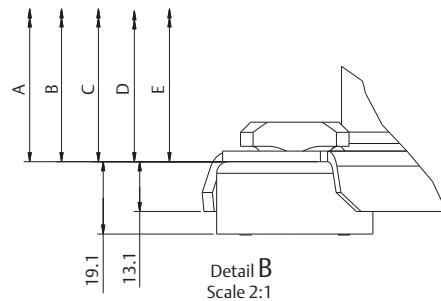
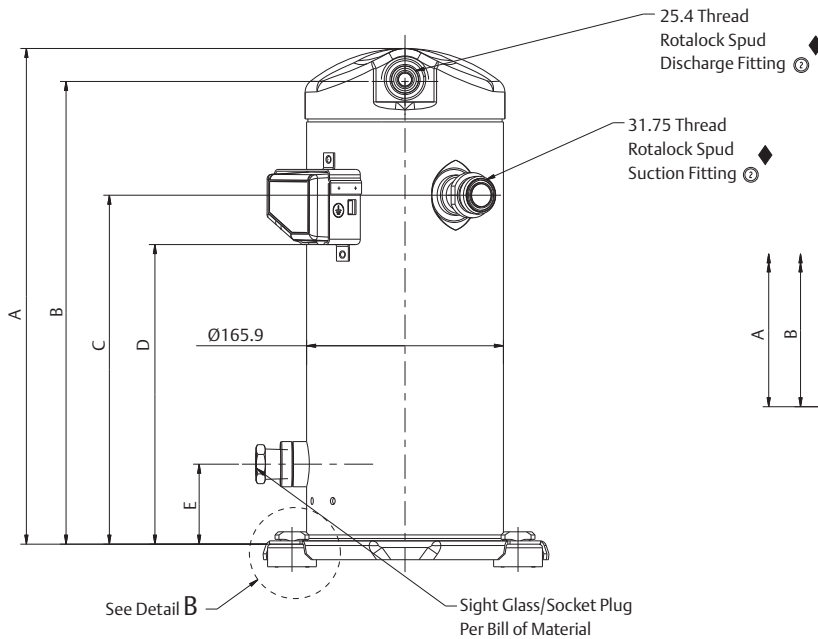


Detail B
Scale 2:1





ZB38~ZB48 (BOM 559)

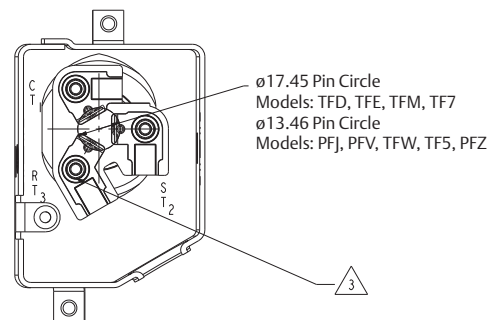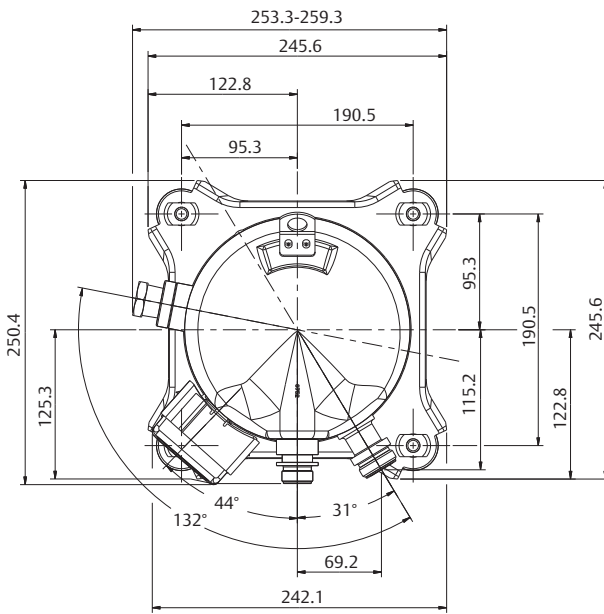

Terminal Box Layout Options
Terminal Box Cover Not Shown
View A-A
Scale 3:2

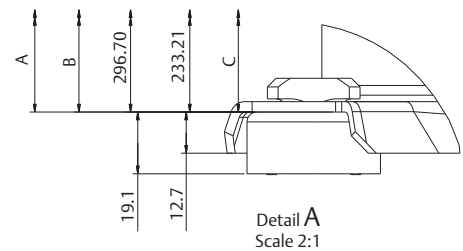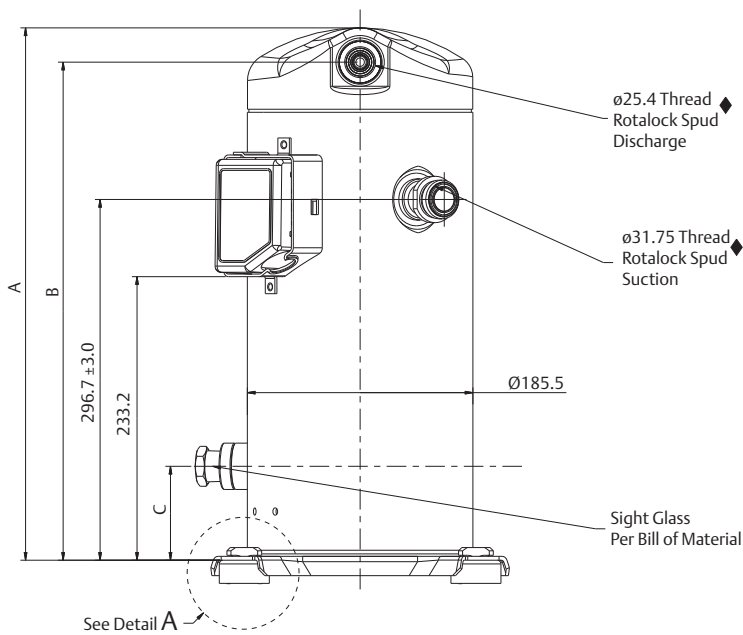

ZB58 (BOM 551)

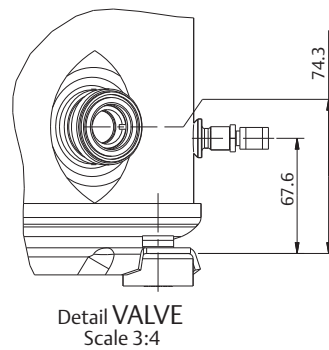
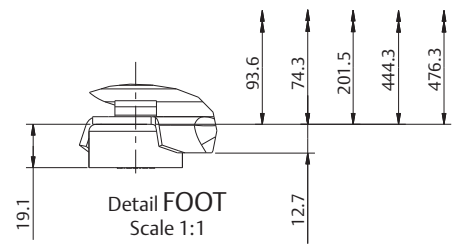
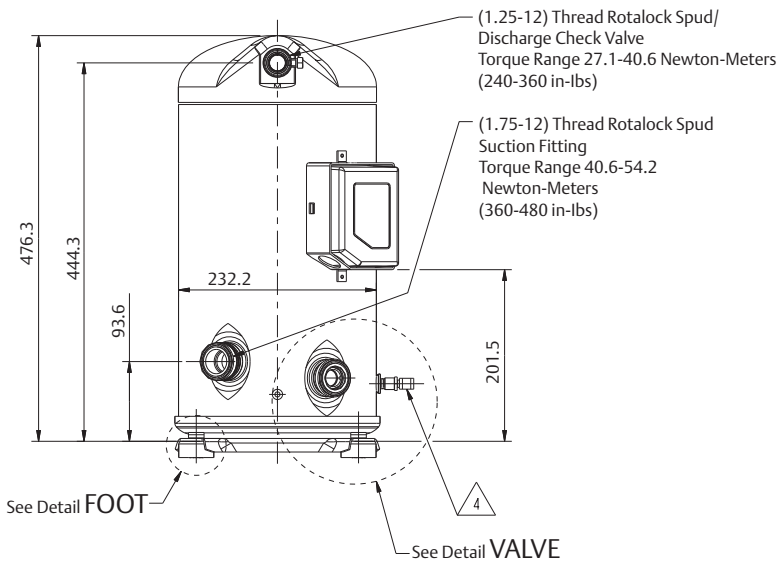
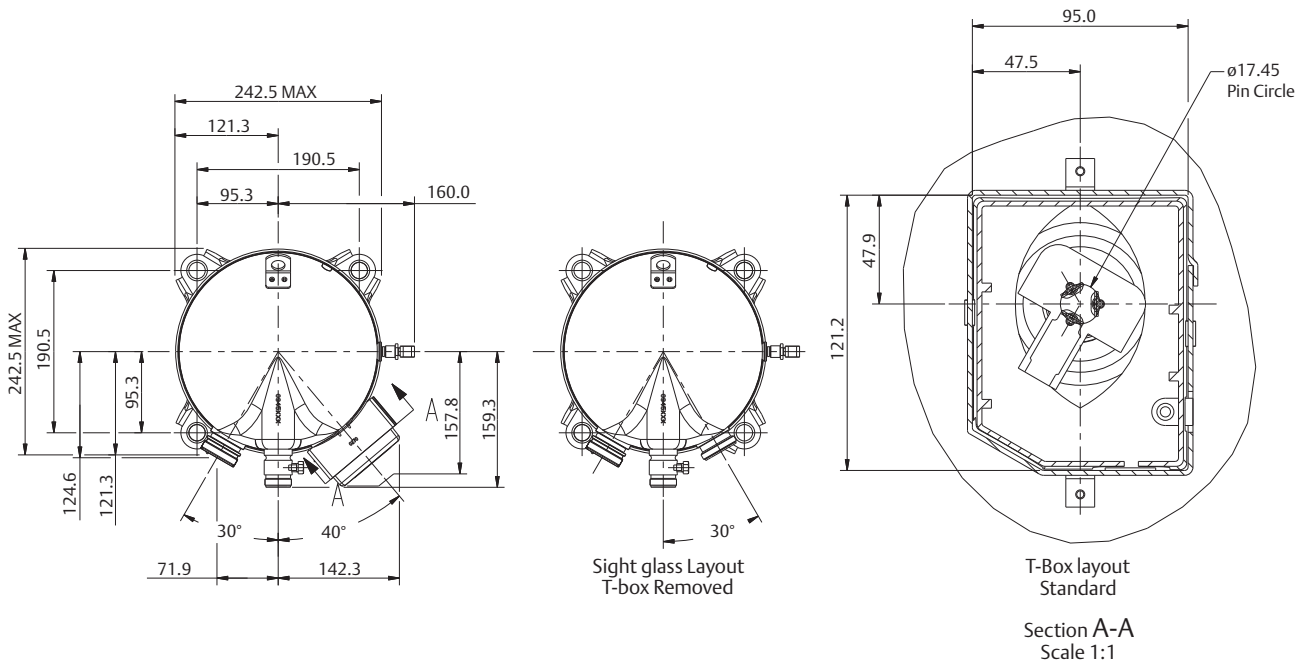


ZB Series

Dimensions

Rotalock, Sight Glass & Oil Schrader Valve

ZB66~ZB88 (BOM 551)

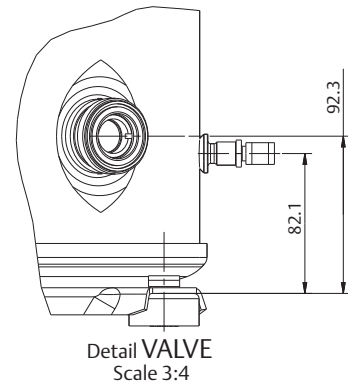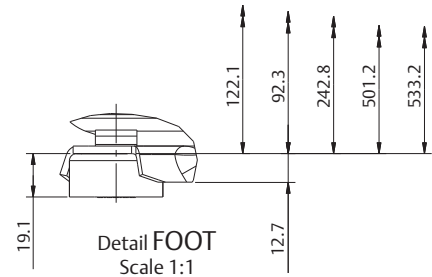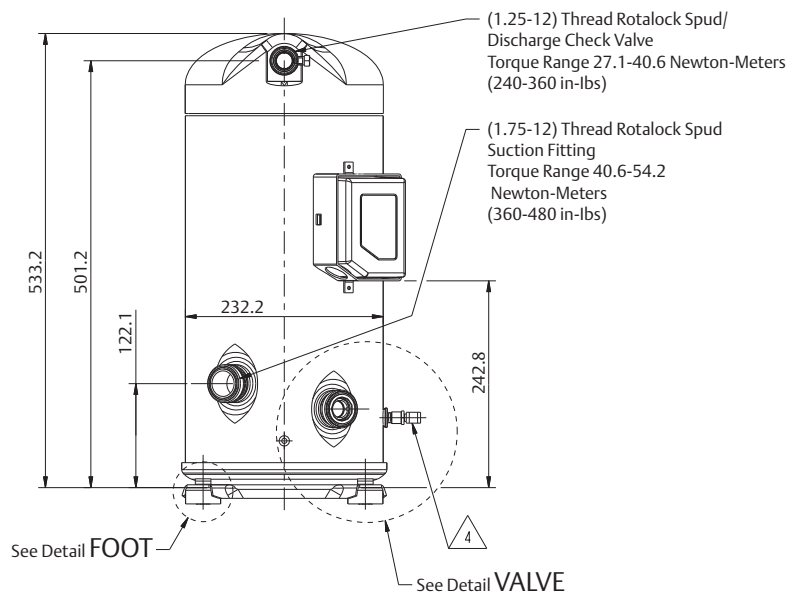
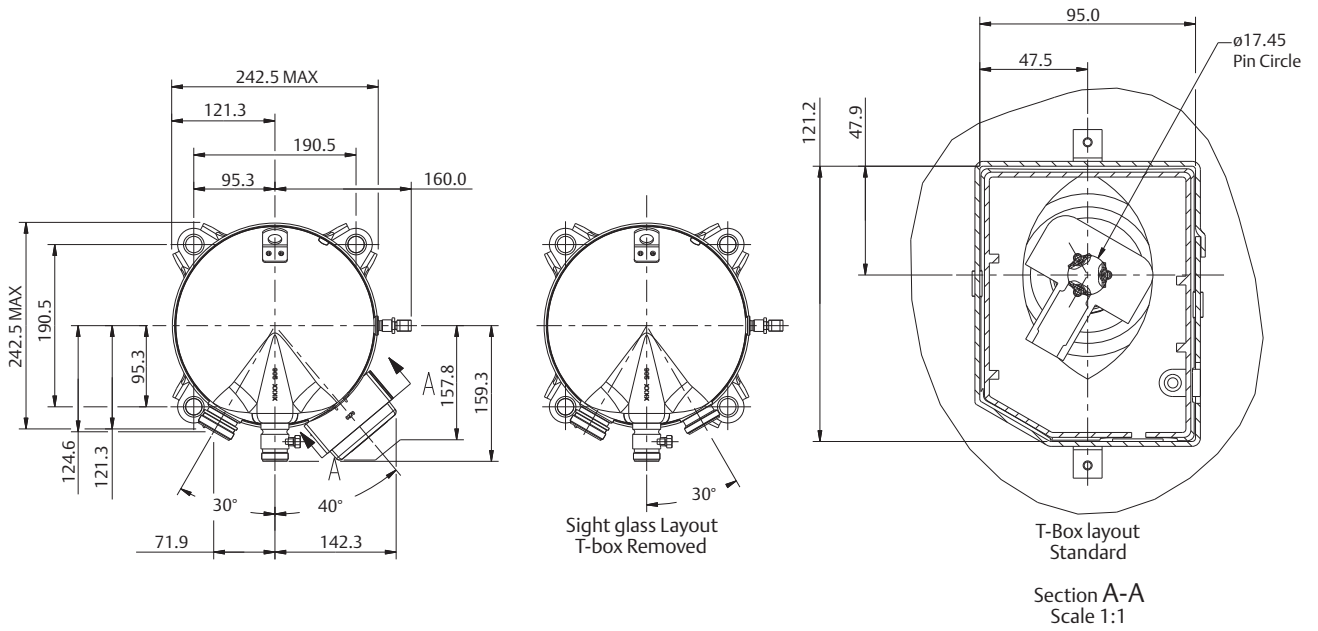


ZB Series



Dimensions

Rotalock, Sight Glass & Oil Schrader Valve


ZB95~ZB114 TW7/TW5 (BOM 551)

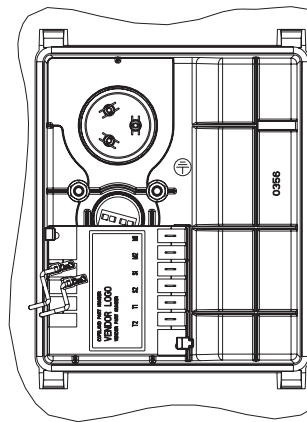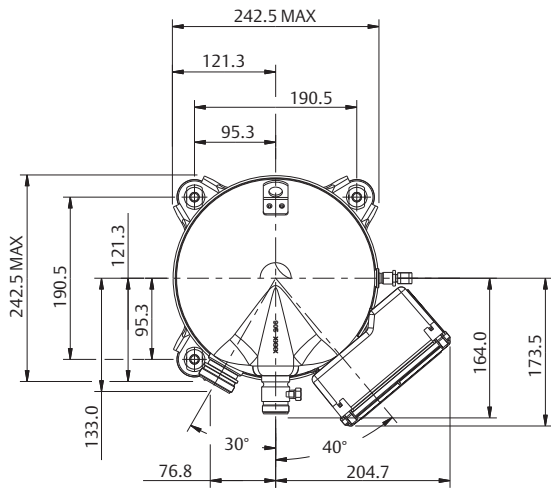

Terminal Box Layout Standard
Scale 3:4

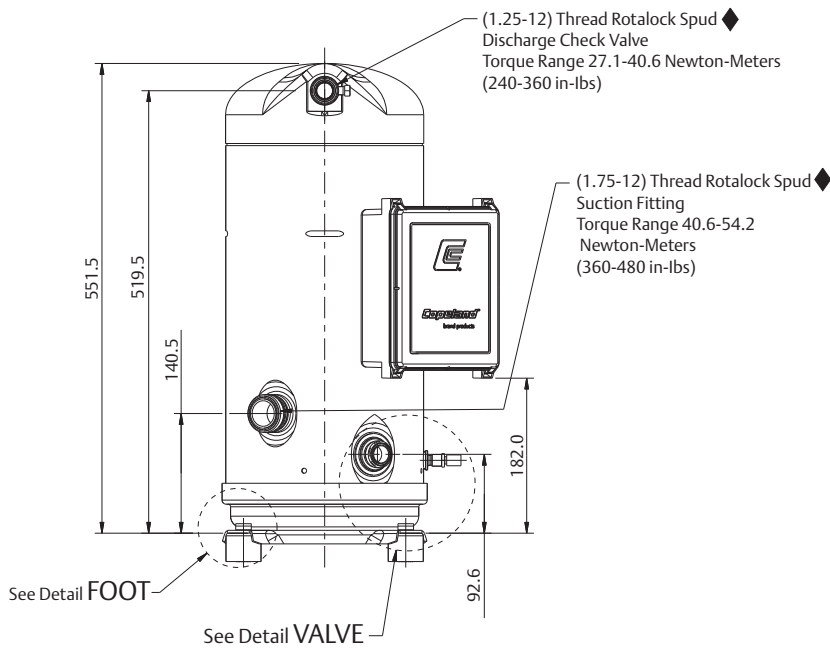


Detail FOOT
Scale 1:1



Detail VALVE
Scale 3:4

Electrical Wiring Diagram

ZB15~ZB114

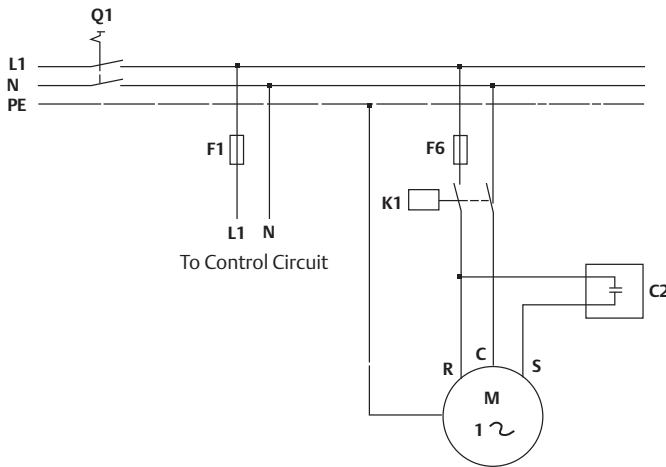

Single Phase Circuit (ZB15-ZB29)

Electrical Schematics

L1/N/PE: Single Phase Lines (line/neutral/ground)

Q1: Manual Switch


F1/F6: Fuse

K1: Compressor Contactor

C2: Run Capacitor

M: Compressor Motor

R/C/S: Compressor Terminal

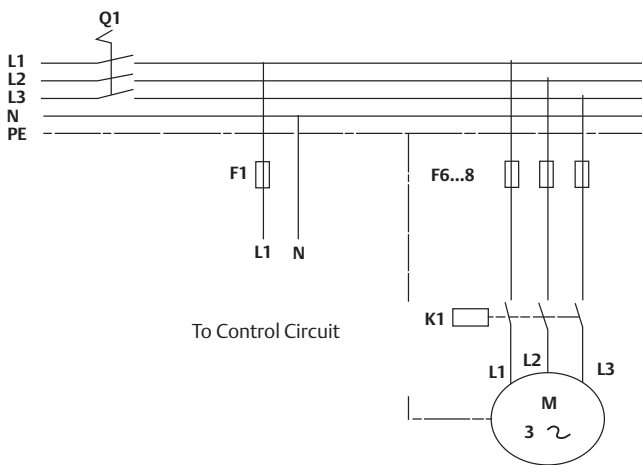

3 Phase (ZB15-ZB114)

(with Motor Protection Code "F")

Electrical Schematics

L1/L2/L3/N/PE: 3 Phase Lines (line/neutral/ground)

Q1: Manual Switch

F1/F6..8: Fuse

K1: Compressor Contactor




M: Compressor Motor

L1/L2/L3: Compressor Terminal


ZB Series

Electrical Wiring Diagram

ZB15~ZB114 Control Circuit

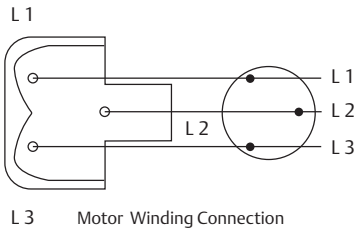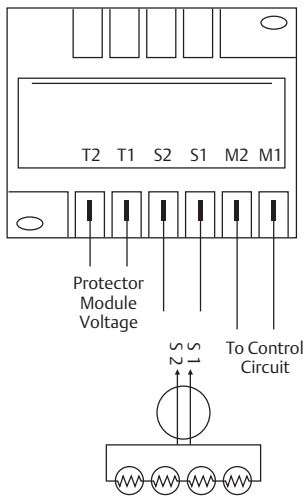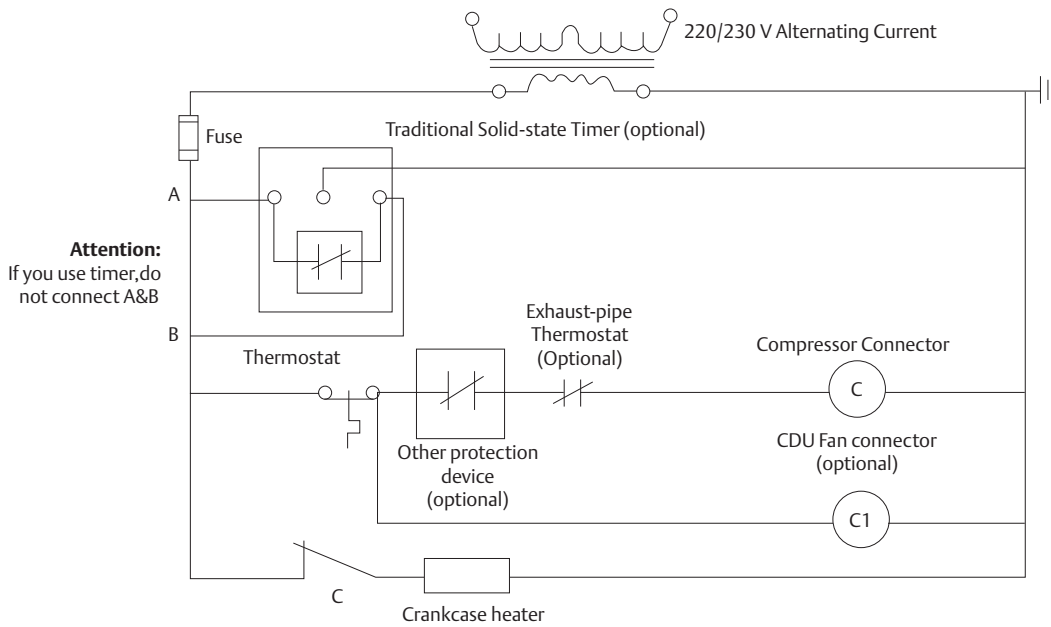

3 Phase (ZB95-114 TW*)
(with Motor Protection Code "W")

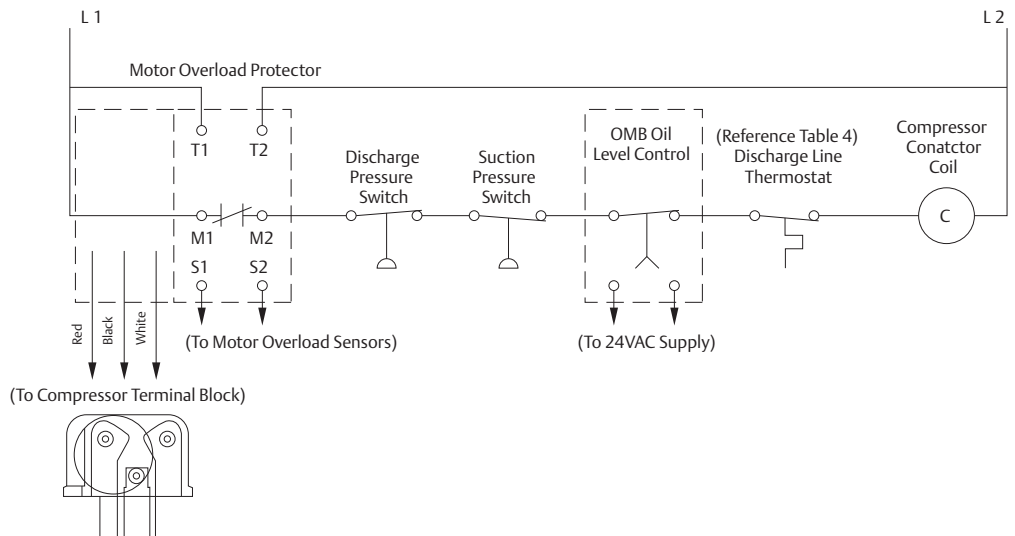

Contact us at:**Emerson Climate Technologies,
Asia Pacific Headquarters**

10/F, Pioneer Building,
213 Wai Yip Street,
Kwun Tong, Kowloon, Hong Kong.
Tel: (852) 2866 3108
Fax: (852) 2520 6227

Australia**Emerson Climate Technologies Australia Pty Ltd**

Unit R7, 391 Park Road
Regents Park, NSW 2143, Australia
Tel: (61-2) 9795 2800
Fax: (61-2) 9738 1699

China - Shanghai**c/o Emerson Climate Technologies (Suzhou) Co. Ltd
Shanghai Sales Office**

11th Floor, Innov Tower,
1801 Hong Mei Road,
XujiaHui District
Shanghai 200233, P. R. China
Tel: (86-21) 3395 0000
Fax: (86-21) 3367 8100

China - Beijing**c/o Emerson Climate Technologies (Suzhou) Co. Ltd
Beijing Sales Office**

Room 310, Canway Building
66 Nan Lishi Road, Xicheng District
Beijing 100045, China
Tel: (86-10) 6805 7825
Fax: (86-10) 6805 6301

China - Guangzhou**c/o Emerson Climate Technologies (Suzhou) Co. Ltd
Guangzhou Sales Office**

Room 508-509, R&F Yinglong Plaza
No. 76 Huangpu Road West,
Guangzhou 510623, PRC.
Tel: (86-20) 2886 7668
Fax: (86-20) 2886 7622

China - Suzhou**c/o Emerson Climate Technologies (Suzhou) Co. Ltd
Suzhou Plant**

No. 69 Suhong West Road,
Suzhou Industrial Park, Suzhou,
Jiangsu Province, P.R.C. 215021 China.
Tel: (86-512) 6257 5505
Fax: (86-512) 6257 5506

India - PUNE**Emerson Climate Technologies (India) Ltd**

Plot No. 23, Rajiv Gandhi Infotech Park,
Phase - II, Hinjewadi,
Pune 411 057, Maharashtra, India
Tel: (91-20) 2553 4988
Fax: (91-20) 2553 6350

India - Mumbai**Emerson Climate Technologies (India) Ltd**

Unit No. 4,5,6 & 7, Bhaveshwar Arcade
LBS Marg, Opp. Shreyas Cinema
Ghatkopar (West)
Mumbai 400 086, Maharashtra, India
Tel: (91-22) 2500 6630/ 2500 6632
Fax: (91-22) 2500 6570

Indonesia**PT. Emerson Indonesia**

Wisma Kota BNI 46 16th floor Suite 16.01
Jl. Jend. Sudirman Kav.1 Jakarta 10220
Tel: (62)21-2513003 ext.6000
Fax: (62)21-2510622

Japan**c/o Emerson Japan Ltd**

Shin-yokohama Tosho Building No. 3
3-9-5 Shin-Yokohama, Kohoku-ku
Yokohama 222-0033 Japan
Tel: (81-45)475 6371
Fax: (81-45)475 3565

Korea**c/o Emerson Electric (Korea) Ltd**

12F, Narae B/D, 719-1, Yeoksam-dong
Gangnam-gu, Seoul, Korea 135-080
Tel: (82-2) 3483-1500
Fax: (82-2) 592-7883 / 592-7886

Malaysia**c/o Emerson Electric (Malaysia) Sdn. Bhd.**

Level M2, Blk A, Menara PKNS-PJ
Jalan Yong Shook Lin
46050 Petaling Jaya, Selangor, Malaysia
Tel: (60-3) 7949 9222
Fax: (60-3) 7949 9333

Philippines**Emerson Climate Technologies
Global Service Centre - Manila**

4th floor, San Miguel Properties Center (SMPC),
No. 7, St. Francis Avenue., Mandaluyong City
Philippines
Trunkline: (63-2) 4795-100/4795-200/4795-300
Tel: (63-2) 702 1579 – Arnel Alegre
Fax: (63-2) 479 5271

Taiwan**c/o Emerson Electric (Taiwan) Co. Ltd**

5th Floor, No.2 Jen Ai Road
Section 4, Taipei 10650, Taiwan
Tel: (886-2) 2325 9555
Fax: (886-2) 2702 9630/ 2784 0022

Thailand - Rayong Plant**c/o Emerson Electric (Thailand) Ltd**

No. 24 Moo 4 Tambol Pluakdaeng, Amphur
Pluakdaeng, Rayong 21140, Thailand
Tel: (66-38) 957 000
Fax: (66-38) 954 251

Thailand - Bangkok**c/o Emerson Electric (Thailand) Ltd**

34th Floor Nation Tower
1858/133 Bangna Trad
Bangkok 10260, Thailand
Tel: (66-2) 716-4700
Fax: (66-2) 751-4240

aprefrigeration@emersonclimate.com